



# DC COMPONENTS CO., LTD.

## INTEGRATED CIRCUIT

DA78L08  
DA78L08A

### TECHNICAL SPECIFICATIONS OF 3-TERMINAL POSITIVE VOLTAGE REGULATOR

#### Description


These regulators employ internal current limiting and thermal shutdown, making them essentially indestructible. They can deliver up to 100mA output current, if the case temperature can keep in  $T_c=25^{\circ}\text{C}$ . They are intended as fixed voltage regulators in a wide range of applications including local (on-card) regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used with power pass elements to make high-current voltage regulators.

#### Pinning

- 1 = Output
- 2 = Ground
- 3 = Input

#### Absolute Maximum Ratings ( $T_A=25^{\circ}\text{C}$ )

Characteristic	Symbol	Rating	Unit
Input Voltage	$V_i$	30	V
Total Power Dissipation	$P_D$	Internal limit	W
Operating Temperature Range	$T_{opr}$	0 to +125	$^{\circ}\text{C}$
Maximum Junction Temperature	$T_J$	125	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-55 to +150	$^{\circ}\text{C}$
Lead Temperature(Soldering 10 Sec.)	$T_L$	260	$^{\circ}\text{C}$

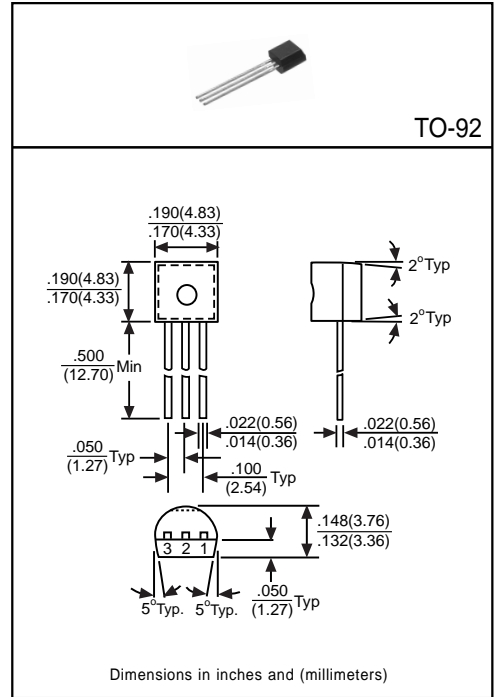

#### Electrical Characteristics

( $V_{in}=14\text{V}$ ,  $I_{out}=40\text{mA}$ ,  $0^{\circ}\text{C}\leq T_J\leq 125^{\circ}\text{C}$ ,  $C_{in}=0.33\mu\text{F}$ ,  $C_{out}=0.1\mu\text{F}$ , unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Output Voltage	DA78L08A	7.76	8.00	8.24	V	$T_J=25^{\circ}\text{C}$
	DA78L08	7.70	8.00	8.30		
	DA78L08A	7.76	-	8.24		$1\text{mA}\leq I_o\leq 70\text{mA}$
	DA78L08	7.60	-	8.40		
	DA78L08A	7.76	-	8.24		
	DA78L08	7.60	-	8.40		
Line Regulation	Regline	-	80	175	mV	$T_J=25^{\circ}\text{C}$ , $10.5\text{V}\leq V_{in}\leq 23\text{V}$
		-	70	125		$T_J=25^{\circ}\text{C}$ , $11\text{V}\leq V_{in}\leq 23\text{V}$
Load Regulation	Regload	-	8.0	40	mV	$T_J=25^{\circ}\text{C}$ , $1\text{mA}\leq I_o\leq 40\text{mA}$
		-	15	80		$T_J=25^{\circ}\text{C}$ , $1\text{mA}\leq I_o\leq 100\text{mA}$
Input Bias Current	$I_{IB}$	-	2.0	6.0	mA	$T_J=25^{\circ}\text{C}$
Input Bias Current Change	$\Delta I_{IB}$	-	-	0.1	mA	$1\text{mA}\leq I_o\leq 40\text{mA}$
		-	-	1.5		$11\text{V}\leq V_{in}\leq 23\text{V}$
Output Noise Voltage	$V_n$	-	60	-	$\mu\text{V}$	$T_A=25^{\circ}\text{C}$ , $10\text{Hz}\leq f\leq 100\text{KHz}$
Ripple Rejection	RR	39	45	-	dB	$11\text{V}\leq V_{in}\leq 21\text{V}$ , $f=120\text{Hz}$
Dropout Voltage	$V_D$	-	1.7	-	V	$T_J=25^{\circ}\text{C}$