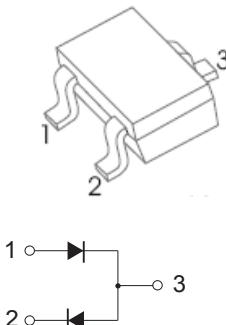


SWITCHING DIODE
FEATURES

- Small surface mounting type
- Two diode elements are connected in series
- **Pb-Free package is available**
RoHS product for packing code suffix "G"
Halogen free product for packing code suffix "H"
- **Moisture Sensitivity Level 1**

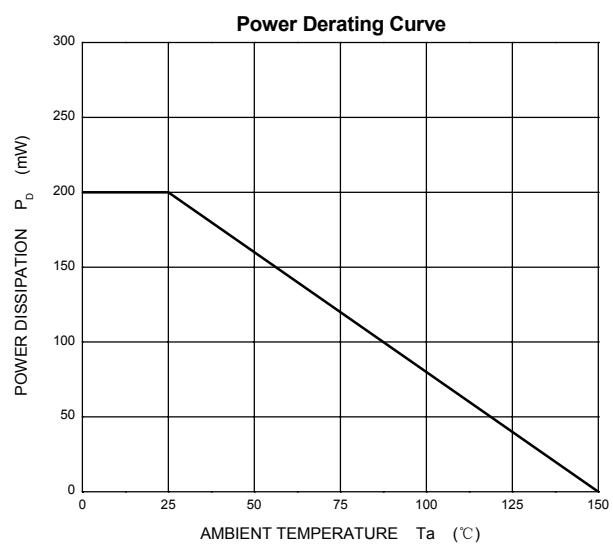
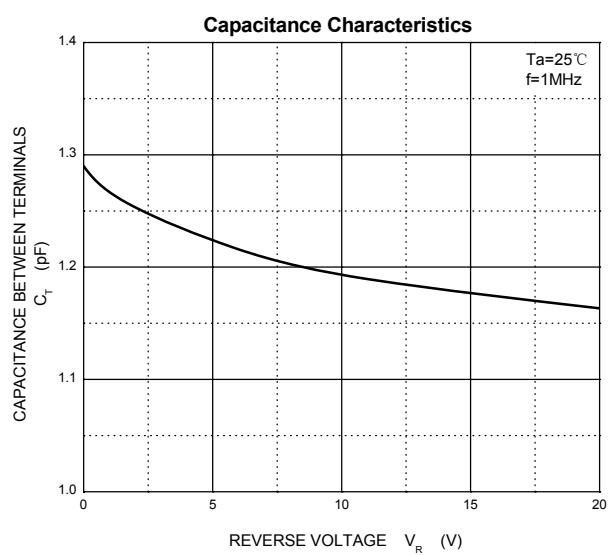
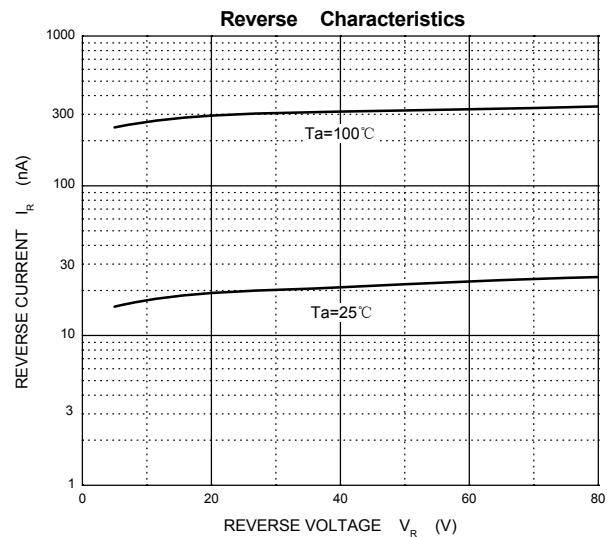
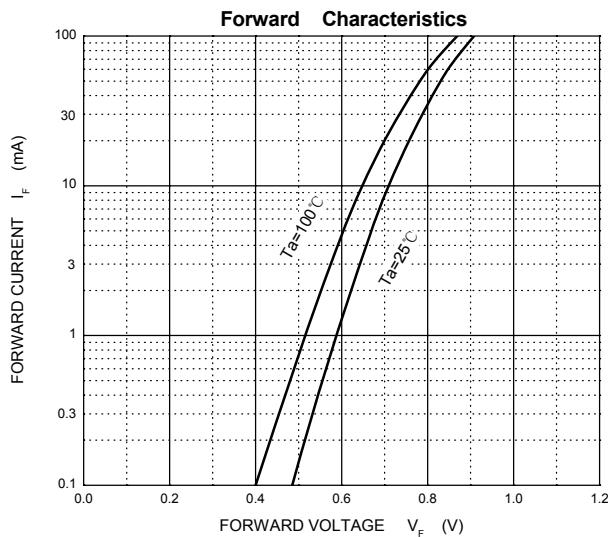
MARKING:A7
SOT-323

Maximum Ratings and Electrical Characteristics, Single Diode @Ta=25 °C

Parameter	Symbol	Limit	Unit
Peak reverse voltage	V _{RM}	80	V
DC reverse voltage	V _R	80	V
Maximum (peak) forward current	I _{FM}	300	mA
Average forward current	I _o	100	mA
Surge current (1μs) (10ms)	I _{FSM}	400 1000	mA
Power dissipation	P _D	200	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55~+150	°C
Operating temperature range	T _{opr}	-40~+100	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Reverse breakdown voltage	V _(BR)	I _R = 100μA	80		V
Reverse voltage leakage current	I _R	V _R =70V		0.2	μA
Forward voltage	V _F	I _F =100mA		1200	mV

Typical Characteristics





WILLAS

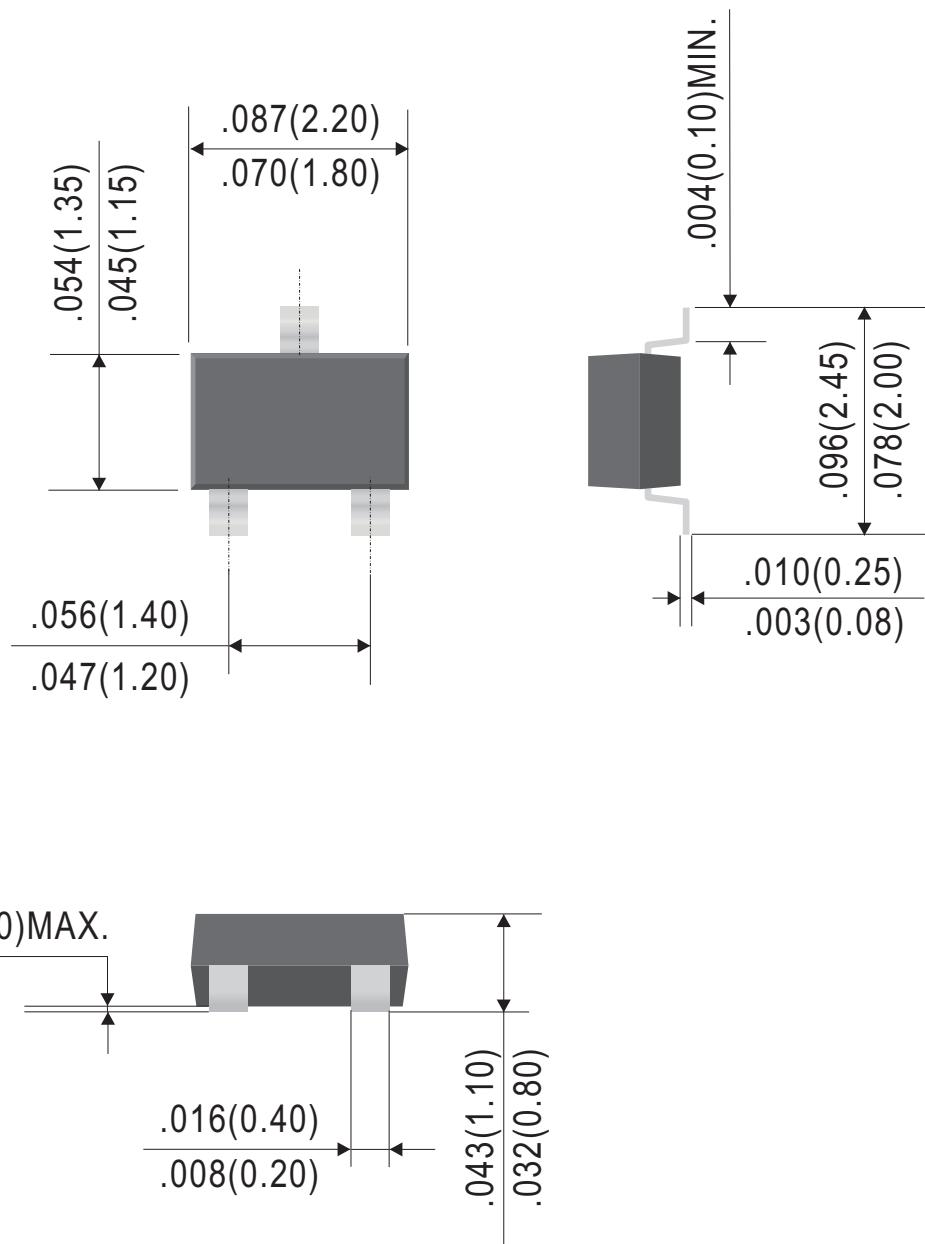


SOT-323 Plastic-Encapsulate Diodes

DAN217U

Outline Drawing

SOT-323



Dimensions in inches and (millimeters)

Rev.D