

## DB151S THRU DB157S

SINGLE-PHASE GLASS PASSIVATED SILICON SURFACE MOUNT BRIDGE RECTIFIER  
 REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 1.5 Ampere


### FEATURES

- ◆ Glass passivated chip junction.
- ◆ High surge overload rating of 50 Amperes peak.
- ◆ Ideal for printed circuit board.
- ◆ High temperature soldering guaranteed: 260°C for 10 seconds.

### Mechanical Data

- ◆ Case: Molded plastic, DB-S.
- ◆ Epoxy: UL 94V-O rate flame retardant.
- ◆ Terminals: Leads solderable per MIL-STD-202, method 208 guaranteed.
- ◆ Mounting position: Any.
- ◆ Weight: 0.02ounce, 0.4gram.

### DB-S

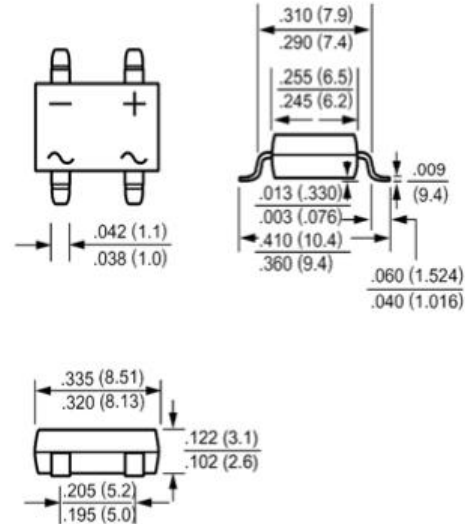

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

PARAMETER	SYMBOL	DB151S	DB152S	DB153S	DB154S	DB155S	DB156S	DB157S	UNIT
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	100	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_A=40^\circ\text{C}$ (Note 2)	$I_{(AV)}$	1.5							A
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	50							A
Maximum forward Voltage at 1.5A DC and 25°C	$V_F$	1.1							V
Maximum DC Reverse Current at $T_A=25^\circ\text{C}$ at Rated DC Blocking voltage $T_A=125^\circ\text{C}$	$I_R$	5.0 500							$\mu\text{A}$
Typical Junction Capacitance (Note 1)	$C_J$	25							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JC}$	40							$^\circ\text{C}/\text{W}$
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$	15							$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$

Note: 1. Measured at 1.0MHz and applied reversed voltage of 4.0 VDC.


2. Units mounted on P.C.B. with 0.5 x 0.5" (13 x 13mm) copper pads.

# DB151S THRU DB157S


SINGLE-PHASE GLASS PASSIVATED SILICON SURFACE MOUNT BRIDGE RECTIFIER  
 REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 1.5 Ampere

## RATING AND CHARACTERISTIC CURVES DB151S THRU DB157S


**Fig. 1 - Derating Curve Output Rectified Current**

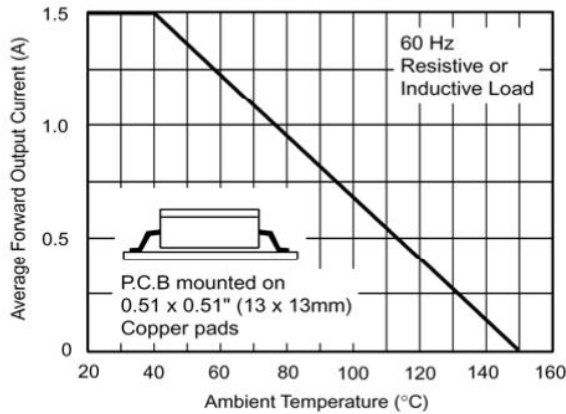


**Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Leg**

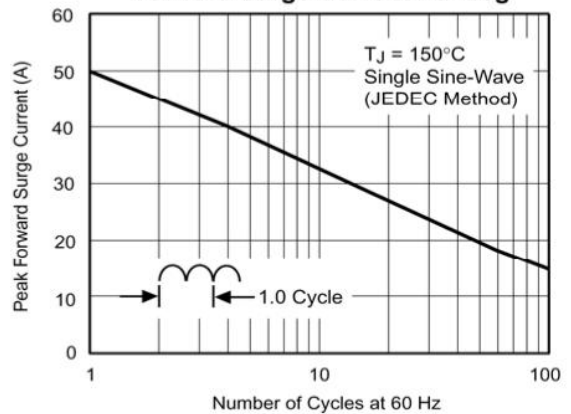


**Fig. 3 - Typical Forward Characteristics Per Leg**

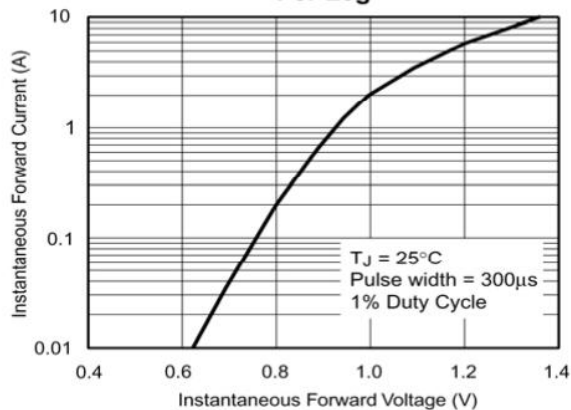


**Fig. 4 - Typical Reverse Leakage Characteristics Per Leg**

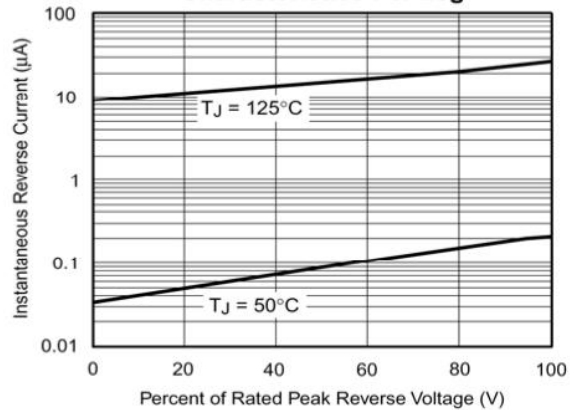

**Fig. 5 - Typical Junction Capacitance Per Leg**

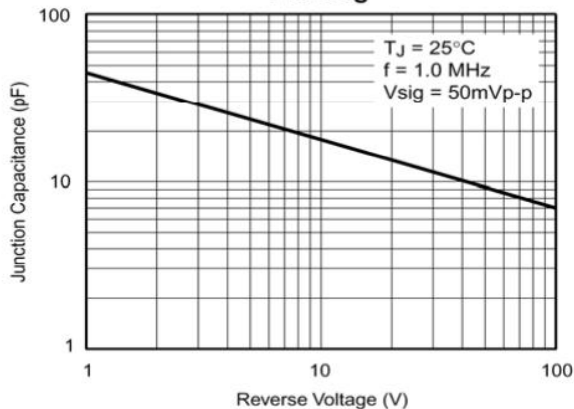

**Fig. 6 - Typical Transient Thermal Impedance**

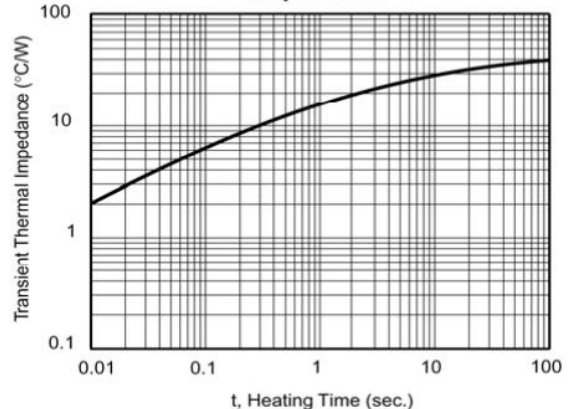

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.