

# VOLTAGE CONTROLLED OSCILLATOR

## SURFACE MOUNT MODEL: DCO400800-5


www.DataSheet4U.com

### WIDE BANDWIDTH


### 4000 - 8000 MHz

#### FEATURES:

- ▶ Miniature Size, Surface Mount (0.3" x 0.3")
- ▶ Exceptional Phase Noise Performance
- ▶ Fast Tuning





#### Phase Noise

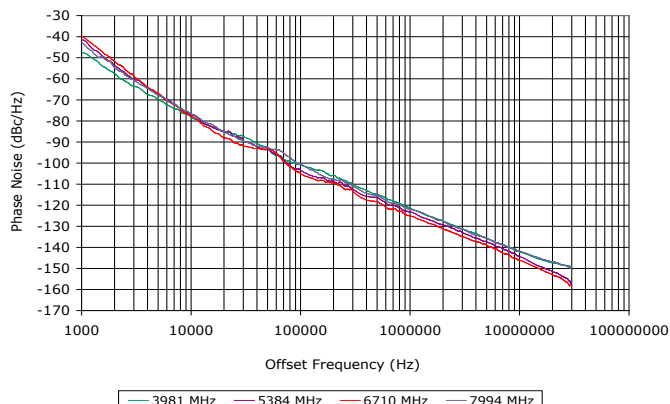


#### SPECIFICATIONS

Frequency	4000 - 8000 MHz	
Tuning Voltage	See table below.	
Bias Voltage	+5 VDC @ 20 mA (Max.)	
Output Power	-3 dBm (Min.)	
Tuning Sensitivity	120 - 620 MHz/V (Typ.)	
Output Impedance	50 Ohms (Nom.)	
Harmonic Suppression	12 dB (Typ.)	
Frequency Pulling	30 MHz (Typ. @ 1.75:1 VSWR)	
Frequency Pushing	10 MHz/V (Typ.)	
Tuning Port Capacitance	15 pF (Typ.)	
Typical Phase Noise	Offset	dBc/Hz
	10 kHz	-78
	100 kHz	-103
Operating Temperature Range	-40 to +85 °C	

Package # 343




TOP VIEW



BOTTOM VIEW

#### RECOMMENDED PCB LAYOUT



DIMENSIONS ARE IN INCHES.

TOLERANCES ON THREE DECIMAL PLACES = ± 0.015

ALL UNLABELED PINS TO BE GROUNDED.

#### Guaranteed Tuning Specifications

Tuning Voltage ( V )	Frequency ( MHz )
0.3	4000 (Max.)
5	5200 (Min.)
8	6200 (Min.)
12	7000 (Min.)
16	8000 (Min.)

#### Absolute Maximum Ratings

Storage Temp. Range	-55 to +125 °C
Bias Voltage	+5.5 V
Tuning Voltage	+20 V
DC Voltage Applied to RF Out	± 25 V

# VOLTAGE CONTROLLED OSCILLATOR



## SURFACE MOUNT MODEL: DCO400800-5

www.DataSheet4U.com

WIDE BANDWIDTH

4000 - 8000 MHz

PERFORMANCE PLOTS

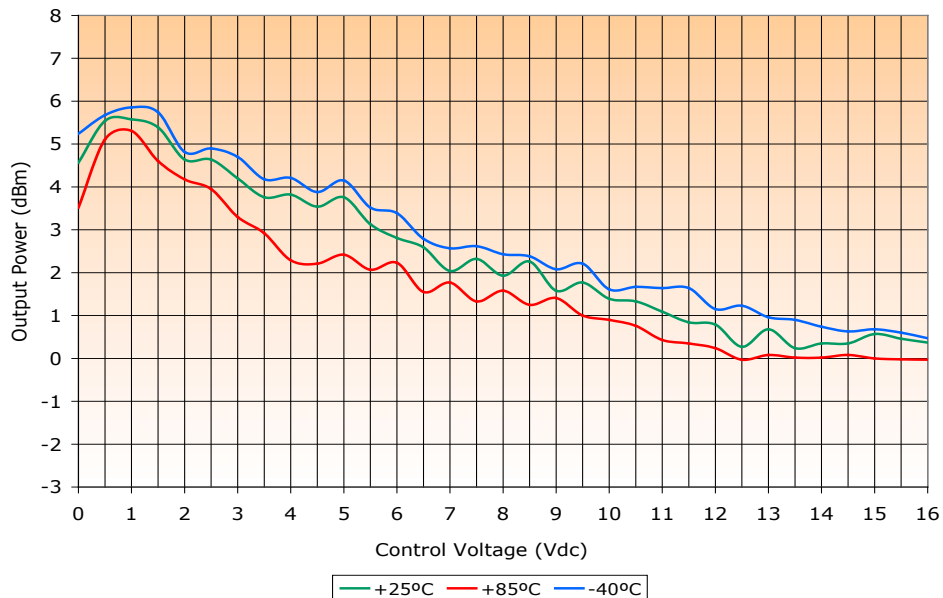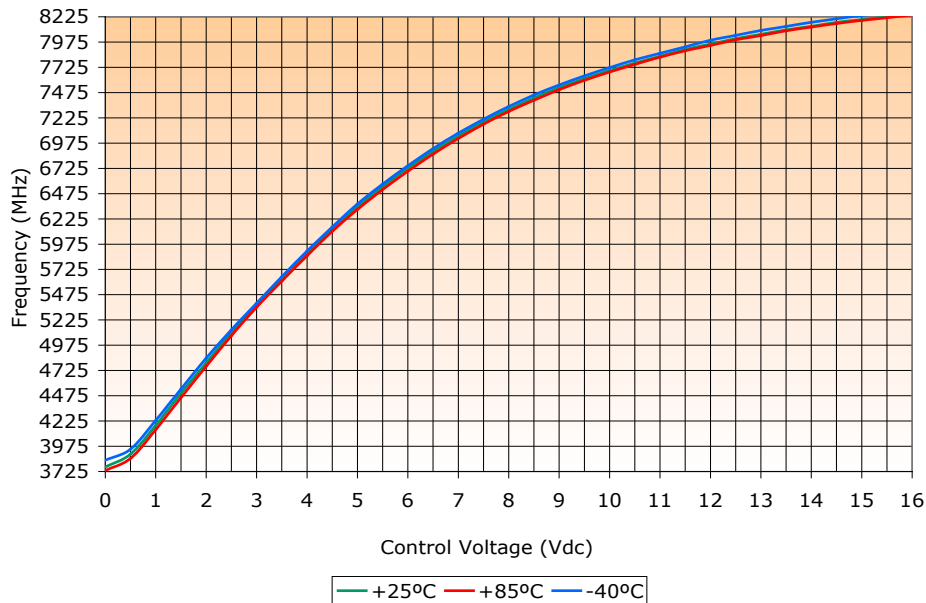

This product is manufactured under one or more of the following patents: Approved: 5,160,810; 5,122,621; 5,390,349; 5,416,449; 5,650,754; 5,805,431; 6,525,623; 6,850,575; 7,088,189; 7,180,381; 7,196,591; 7,262,670; 7,265,642; 7,292,113; 7,365,612; 7,495,525; 2,548,311; 2,548,317; 7,545,229; 7,580,693; 7,586,381 | Pending: 60/493075; 60/501371 & 60/501790; 60/527957 & 60/528670; 60/563481; 60/564173; 60/589090; 60/601823; 60/605791; EV31369834; 11/259766; 60/622485 & 60/710310; 10/937525/60/736901; 60/732787; 7,495,525; 2,548,311; 2,548,317; 7,545,229; 2,563,174; 7,580,693

Copyright © Synergy Microwave Corporation  
 www.DataSheet4U.com • Newark • Paterson, New Jersey 07504 USA • Tel: (973) 881-8800 • Fax: (973) 881-8361  
 E-Mail: sales@synergymwave.com • World Wide Web: http://www.synergymwave.com



# VOLTAGE CONTROLLED OSCILLATOR



## SURFACE MOUNT MODEL: DCO400800-5

www.DataSheet4U.com

WIDE BANDWIDTH

4000 - 8000 MHz

PERFORMANCE PLOTS

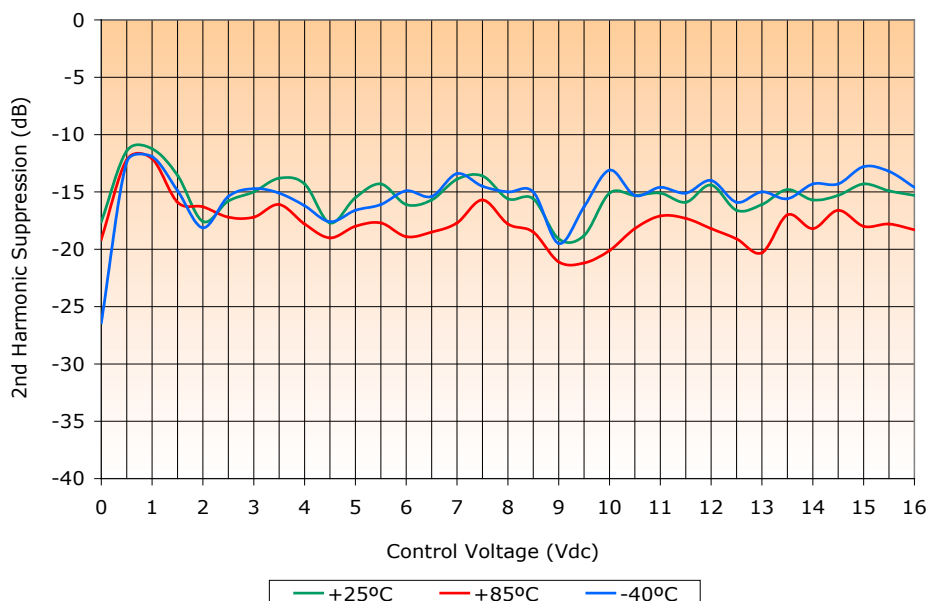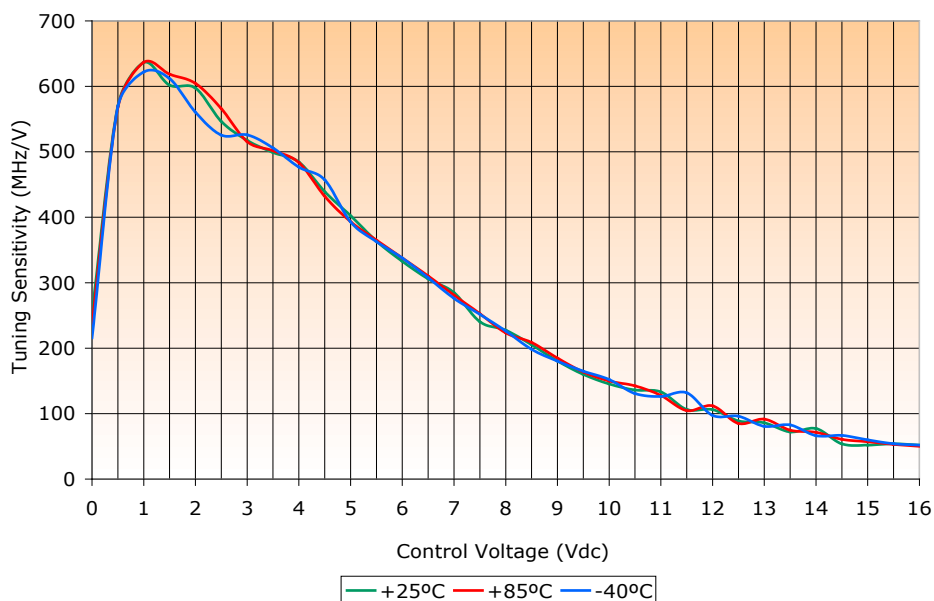

This product is manufactured under one or more of the following patents: Approved: 5,160,810; 5,122,621; 5,390,349; 5,416,449; 5,650,754; 5,805,431; 6,525,623; 6,850,575; 7,088,189; 7,180,381; 7,196,591; 7,262,670; 7,265,642; 7,292,113; 7,365,612; 7,495,525; 2,548,311; 2,548,317; 7,545,229; 7,580,693; 7,586,381 | Pending: 60/493075; 60/501371 & 60/501790; 60/527957 & 60/528670; 60/563481; 60/564173; 60/589090; 60/601823; 60/605791; EV31369834; 11/259766; 60/622485 & 60/710310; 10/937525/60/736901; 60/732787; 7,495,525; 2,548,311; 2,548,317; 7,545,229; 2,563,174; 7,580,693