

SHINDENGEN

Super Fast Recovery Rectifiers

Single

DE3L40

400V 3A


FEATURES

- SMT
- Low noise
- trr50ns

APPLICATION

- Switching power supply
- DC/DC converter
- Free Wheel
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

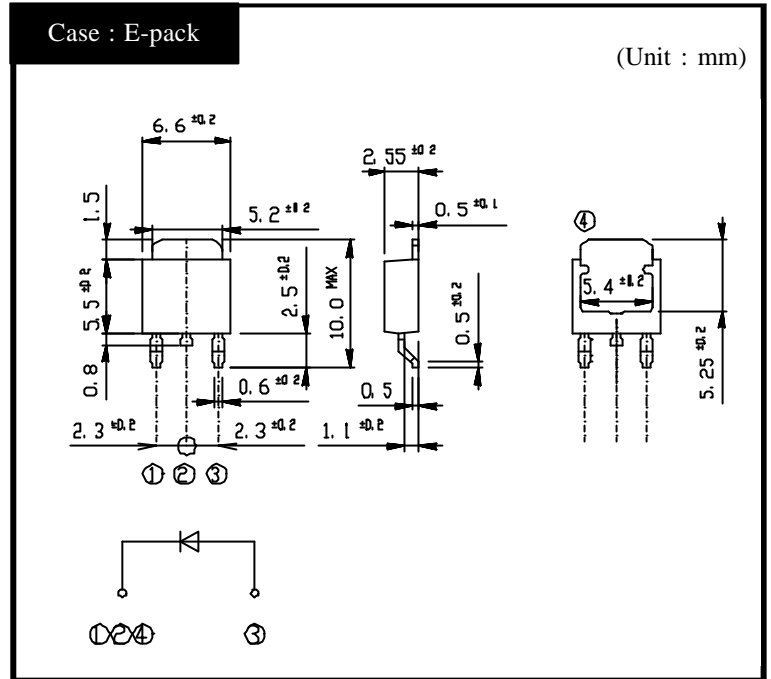

RATINGS

Absolute Maximum Ratings (If not specified Tc=25)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55 ~ 150	
Operating Junction Temperature	Tj		150	
Maximum Reverse Voltage	V _{RM}		400	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, Tc=99	3	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25	50	A

Electrical Characteristics (If not specified Tc=25)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =3A, Pulse measurement	Max.1.3	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement	Max.10	μA
Reverse Recovery Time	trr	I _F =0.5A, I _R =1A	Max.50	ns
Thermal Resistance	θ _C	junction to case	Max.12	/W


DE3L40

Forward Voltage

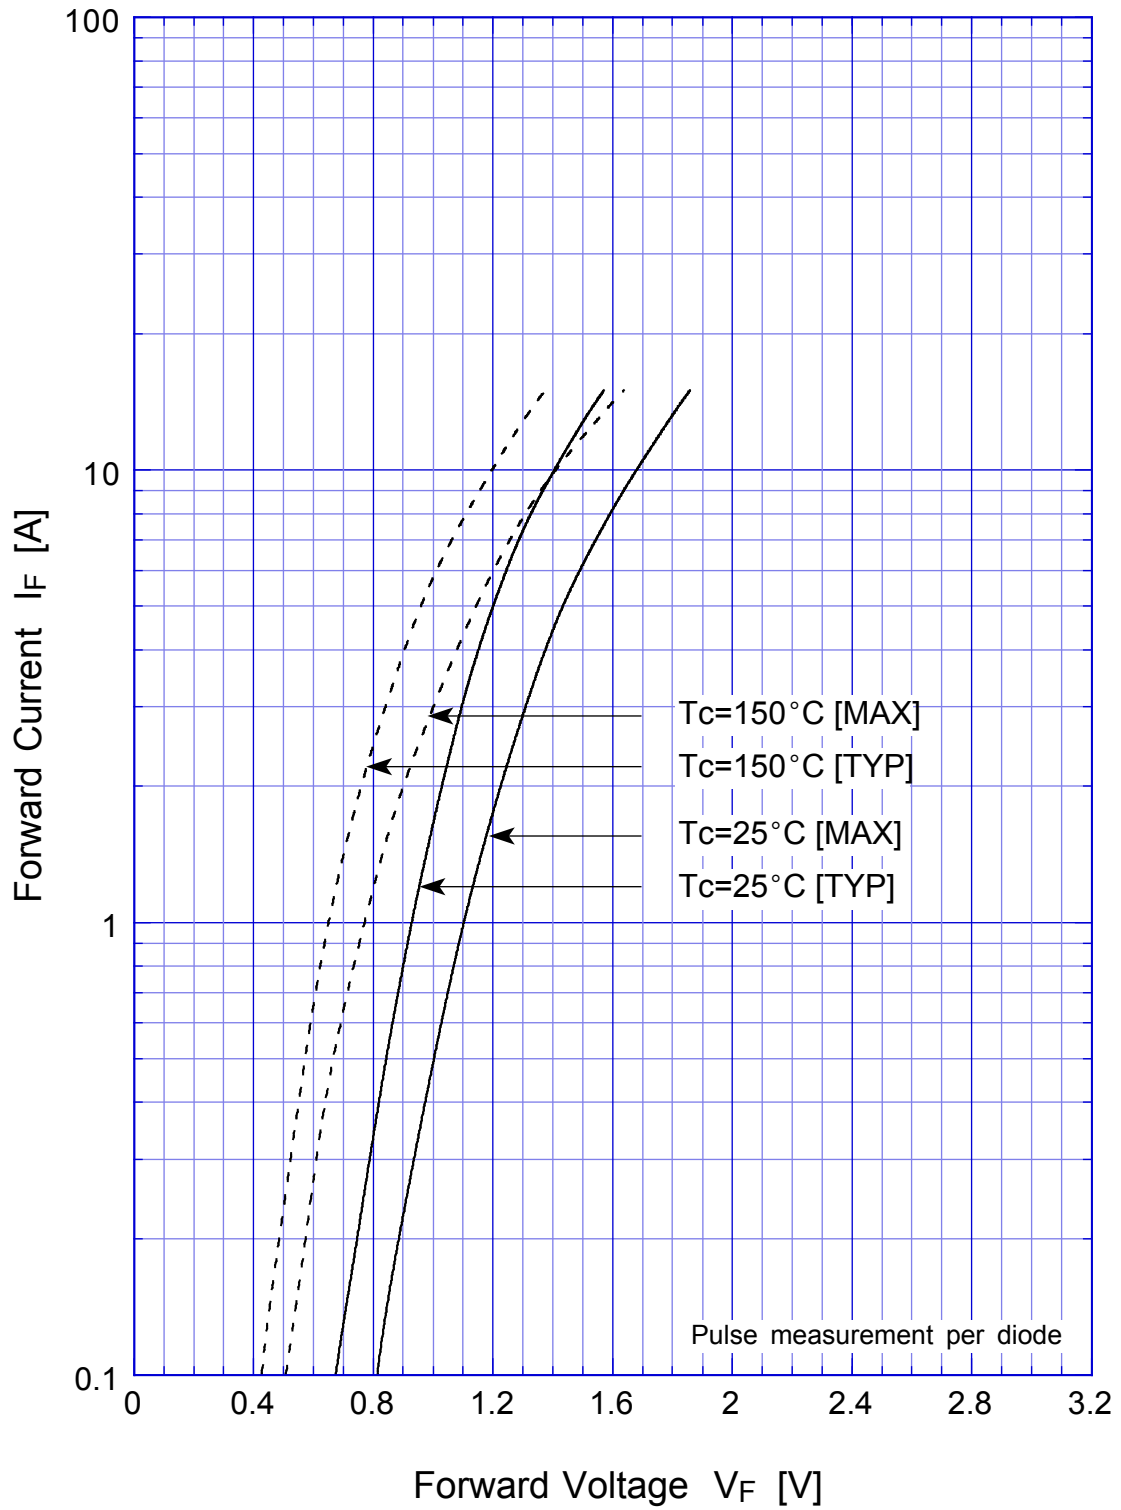


DE3L40

Forward Power Dissipation

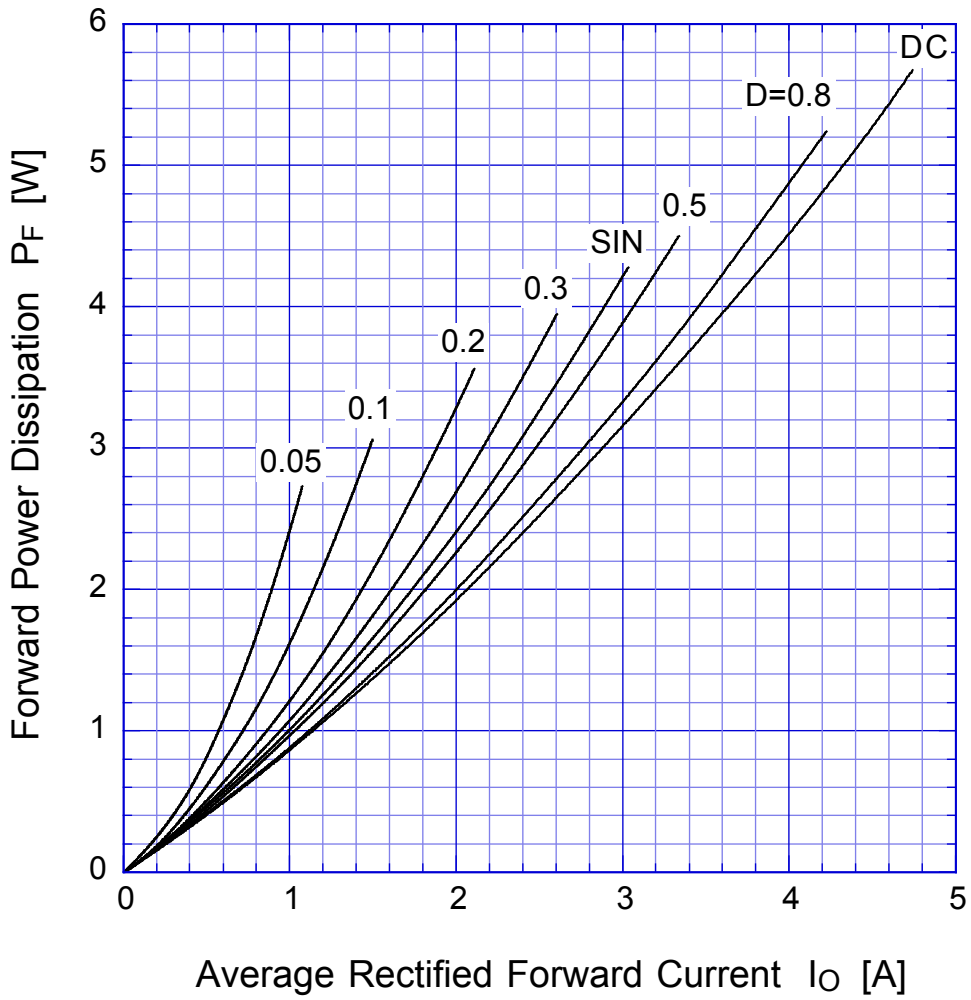


$T_j = T_{jmax}$

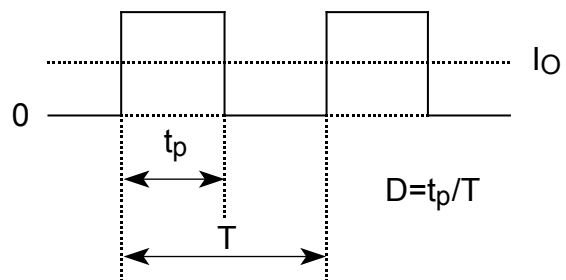

DE3L40

Derating Curve

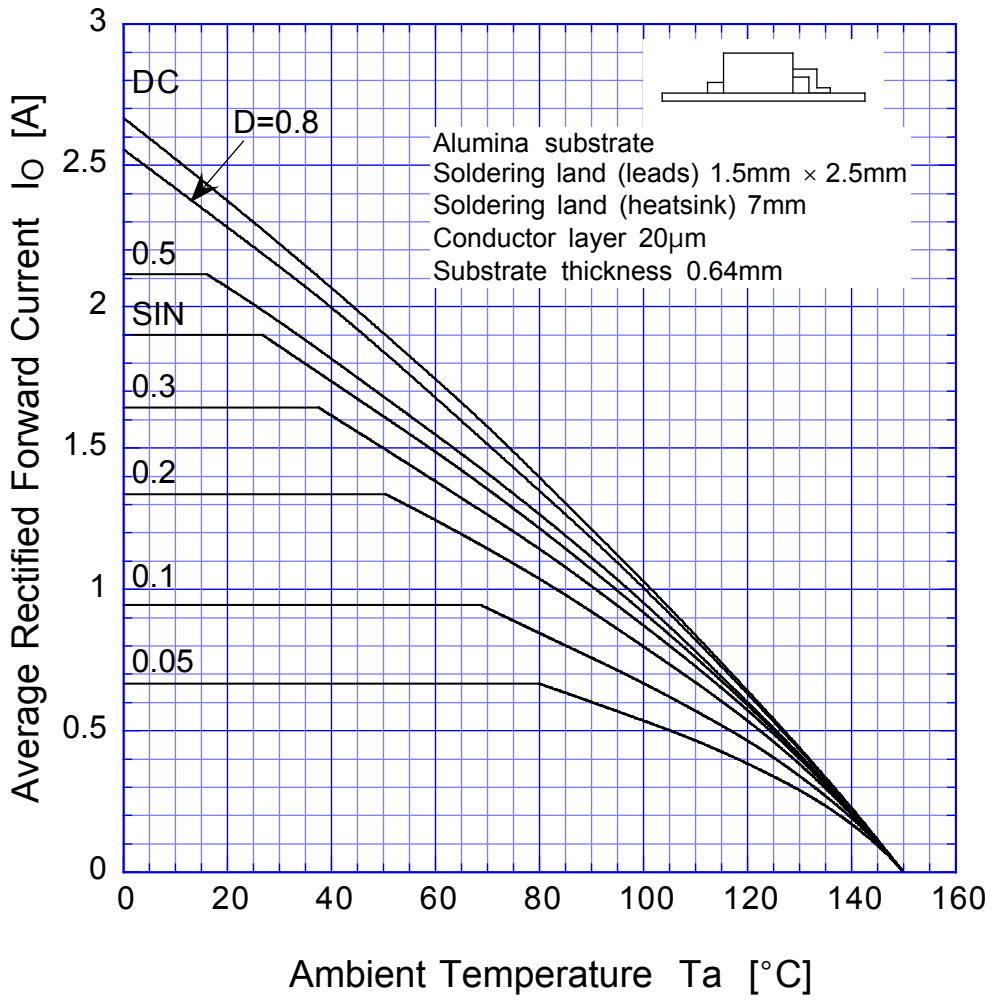


$$V_R = V_{RM}$$




DE3L40

Derating Curve

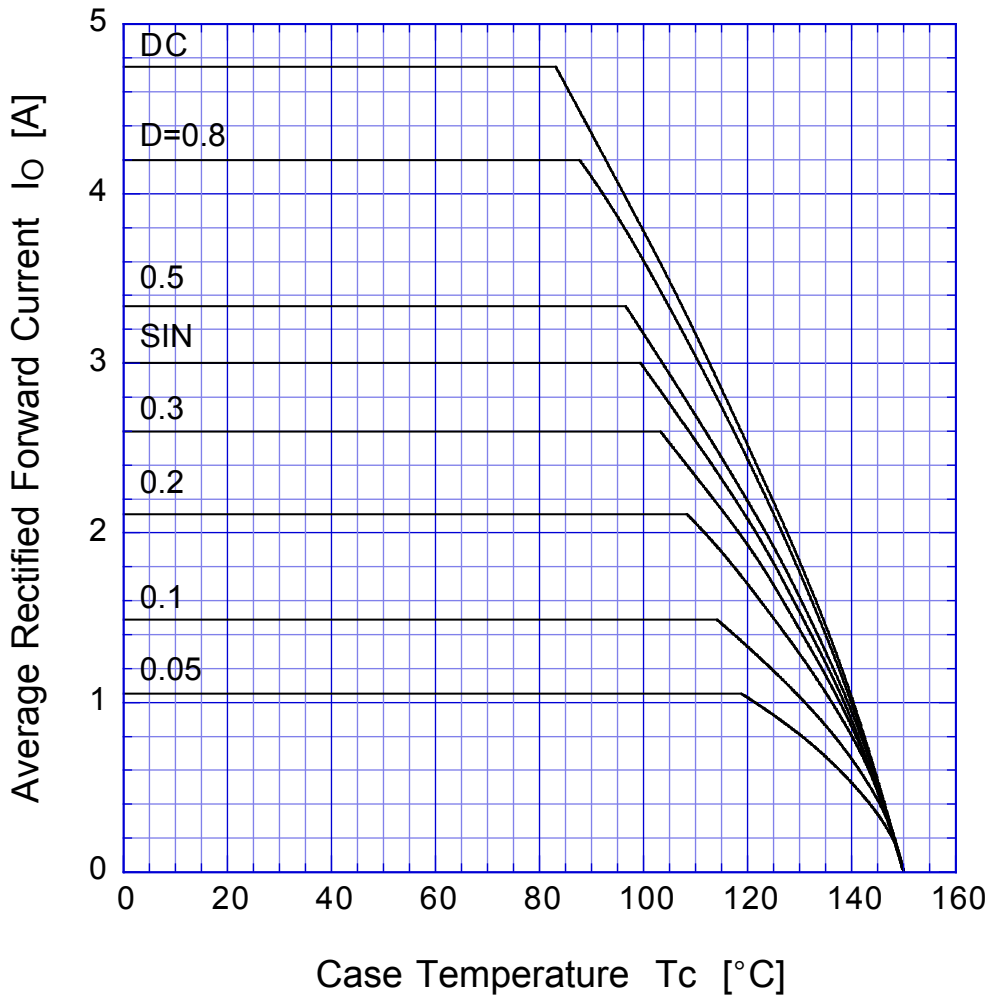


$$V_R = V_{RM}$$

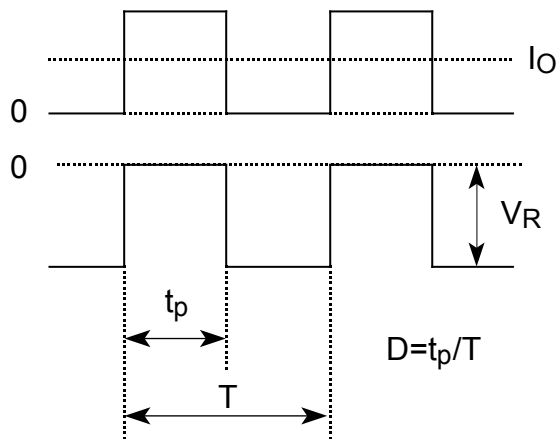

DE3L40

Peak Surge Forward Capability

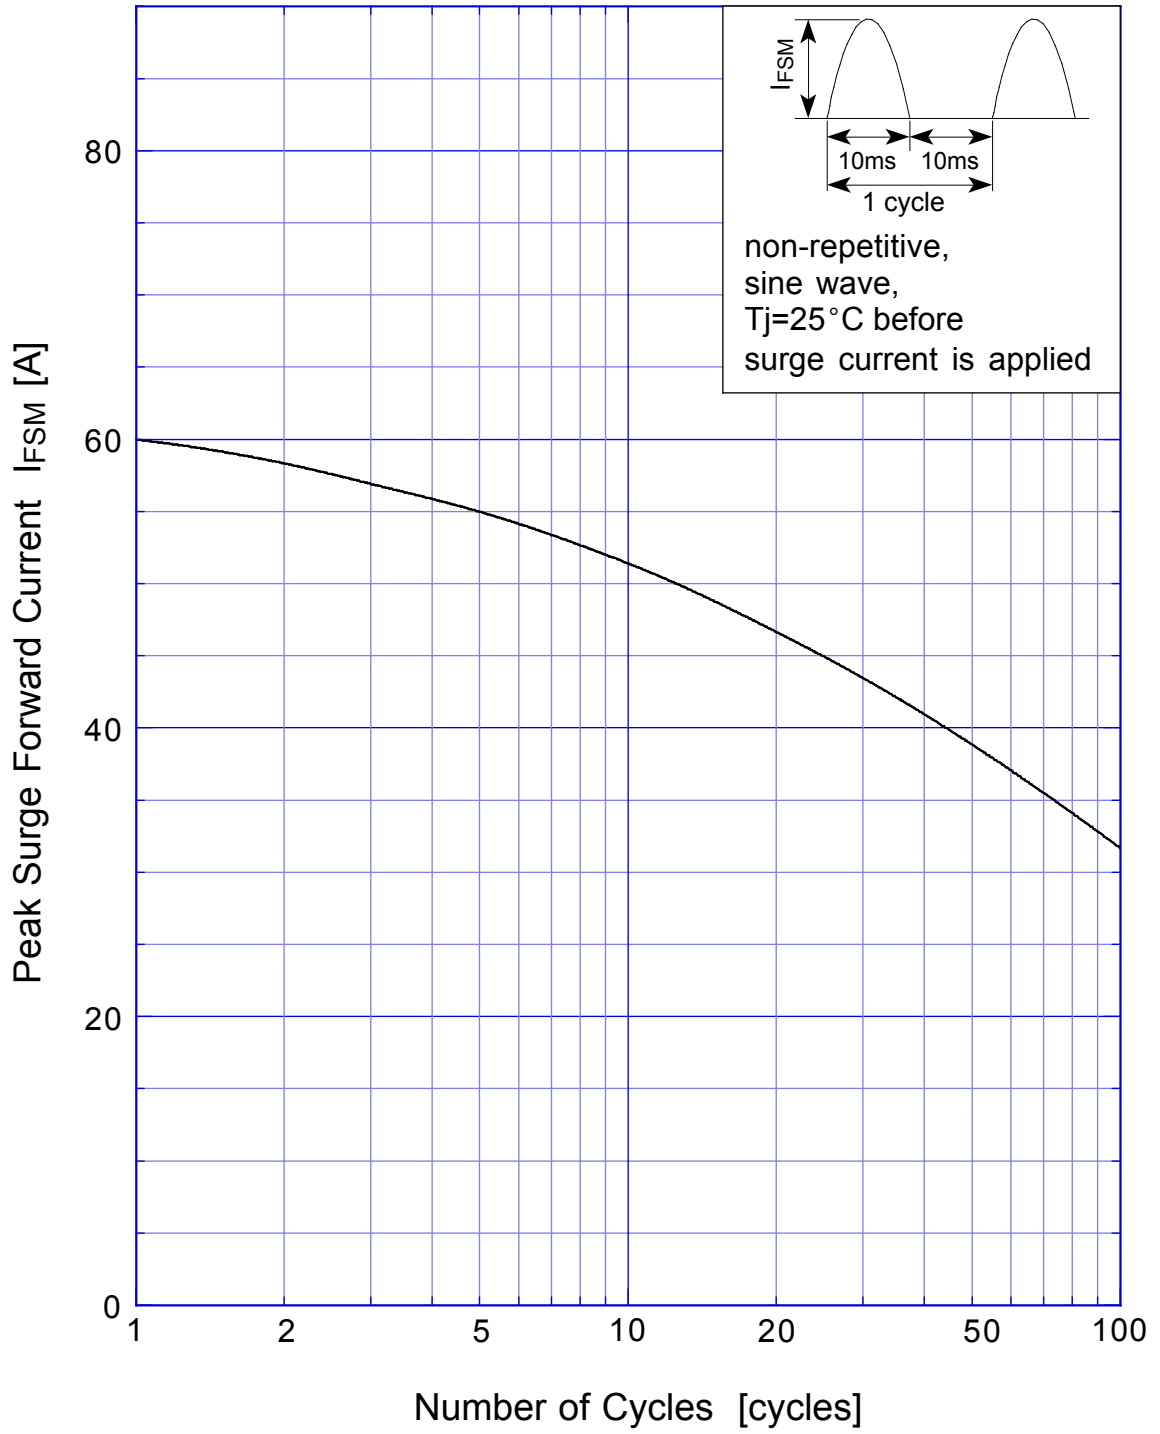

DE3L40 Junction Capacitance

