



Miniature Glass Passivated Single-Phase Surface Mount Bridge Rectifiers
Reverse Voltage 50 to 1000 Volts Forward Current 1.0 Ampere

Features


- ◆ Ideal for printed circuit boards
- ◆ Applicable for automotive insertion
- ◆ High surge current capability
- ◆ Solder Dip 260 °C, 40 seconds

Mechanical Data




- ◆ Case: DFS
- ◆ Epoxy meets UL-94V-0 Flammability rating
- ◆ Terminals: Matte tin plated (E3 Suffix) leads, solderable per J-STD-002B and JESD22-B102D
- ◆ Polarity: As marked on body

Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for SMPS, Lighting Ballaster, Adapter, Battery Charger, Home Appliances, Office Equipment, and Telecommunication applications



Case Style DFS



Maximum Ratings and Electrical Characteristics

(T_A = 25°C unless otherwise noted)

Parameter	Symbols	DF005S DBS101	DF01S DBS102	DF02S DBS103	DF04S DBS104	DF06S DBS105	DF08S DBS106	DF10S DBS107	Units
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward output rectified current at T _A =40°C (Note 2)	I _{F(AV)}					1.0			Amp
Peak forward surge current single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}					30 0			Amps
Rating for fusing (t < 8.3ms)	Pt					10			A ² sec
Maximum instantaneous forward voltage drop per leg at 0.5A	V _F					1.1			Volts
Maximum DC reverse current at rated DC blocking voltage per leg T _A =25°C T _A =125°C	I _R					5.0 500			uA
Typical junction capacitance per leg (Note 1)	C _J					25			pF
Typical thermal resistance per leg (Note 2)	R _{θJA} R _{θJL}					40 15			°C/W
Operating junction and storage temperature range	T _J , T _{STG}					-55 to +150			°C

- Notes**
1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
 2. Units mounted on P.C.B. with 0.51 x 0.51" (13 x 13mm) copper pads

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

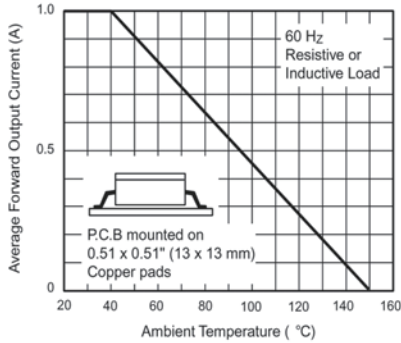


Figure 1. Derating Curve Output Rectified Current


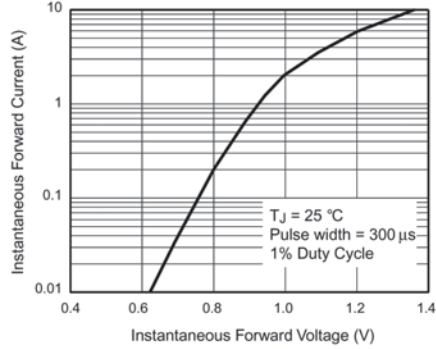


Figure 3. Typical Forward Characteristics Per Leg

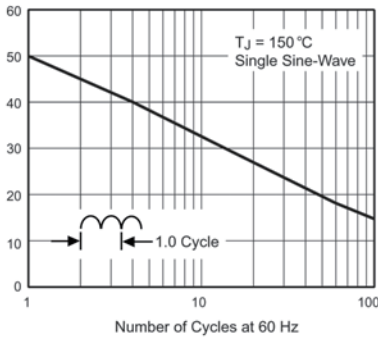

2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

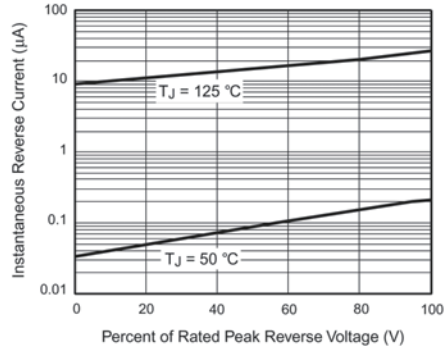


Figure 4. Typical Reverse Leakage Characteristics Per Leg

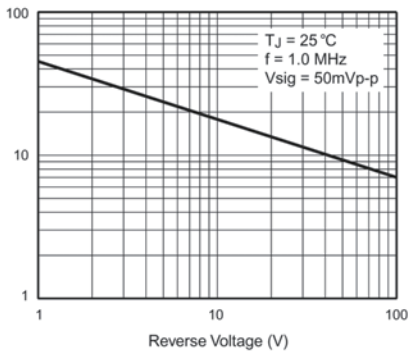


Figure 5. Typical Junction Capacitance Per Leg

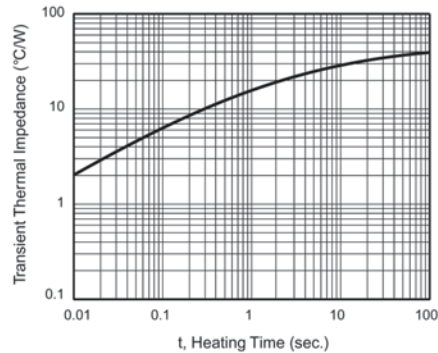


Figure 6. Typical Transient Thermal Impedance