



## Glass Passivated Bridge Rectifier



DFS

Primary Characteristics		
$I_F$	2	A
$V_{RRM}$	50~1000	V
$I_{FSM}$	60	A
$V_F$	1.1	V
$T_J \text{ max}$	150	°C

Features
<ul style="list-style-type: none"> <li>• Rating to 1000V PRV</li> <li>• Ideal for printed circuit board</li> <li>• Low forward voltage drop, high current capability</li> <li>• Reliable low cost construction utilizing molded plastic technique results in inexpensive product</li> <li>• The plastic material has UL flammability classification 94V-0</li> </ul>

Mechanical Data
<ul style="list-style-type: none"> <li>• Polarity: As marked on Body</li> <li>• Weight: 0.02 ounces, 0.38 grams</li> <li>• Mounting position: Any</li> </ul>

Ordering Information		
Part No.	Package	Packing
DF2005S thru DF210S	DFS	1500 / Tape & Reel

Maximum Ratings (TA=25°C unless otherwise specified)									
Parameter	Symbol	DF 2005S	DF 201S	DF 202S	DF 204S	DF 206S	DF 208S	DF 210S	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward rectified current @ $T_A=40^\circ\text{C}$	$I_F$	2.0							A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	60.0							A
Maximum Instantaneous Forward Voltage $I_F=2\text{A}$ @ $25^\circ\text{C}$	$V_F$	1.10							V
Maximum DC Reverse Current @ $T_c=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_c=125^\circ\text{C}$	$I_R$	10 500							uA
$I^2t$ Rating for Fusing ( $t < 8.3\text{ms}$ ) $I^2t$ A <sup>2</sup> s	$I^2t$	14.94							A <sup>2</sup> s
Typical Junction capacitance Per Element (Note 1)	$C_j$	25							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	40							°C/W
Operating Temperature Range	$T_J$	-55 to +150							°C
Storage Temperature Range	$T_{STG}$	-55 to +150							°C

NOTES:

1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC
2. Thermal resistance from junction to ambient mounted on P.C.B with 0.5\*0.5"(13\*13mm) copper pads.



### Rating and Characteristics Curves

FIG.1-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

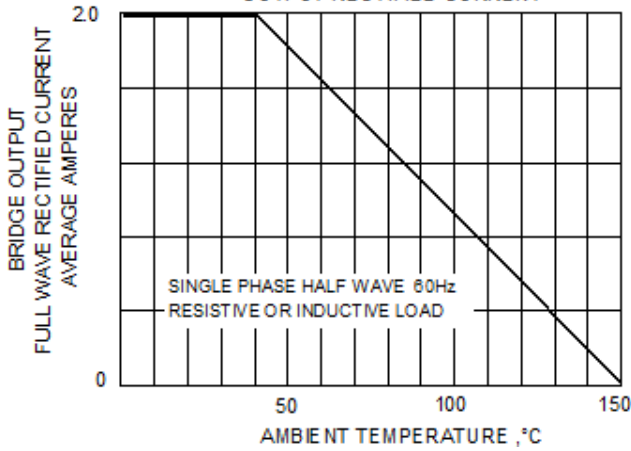


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

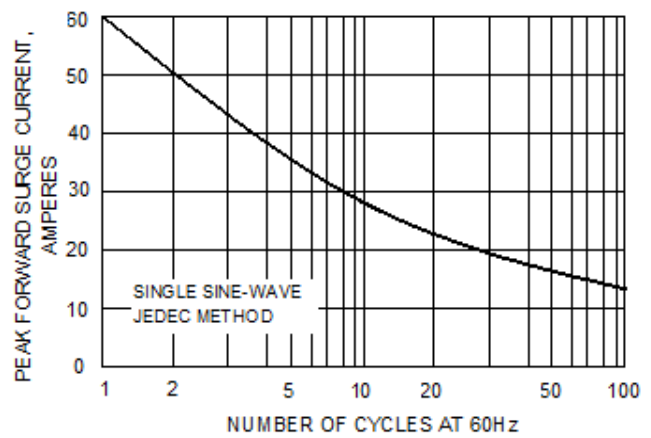


FIG.3-TYPICAL REVERSE CHARACTERISTICS



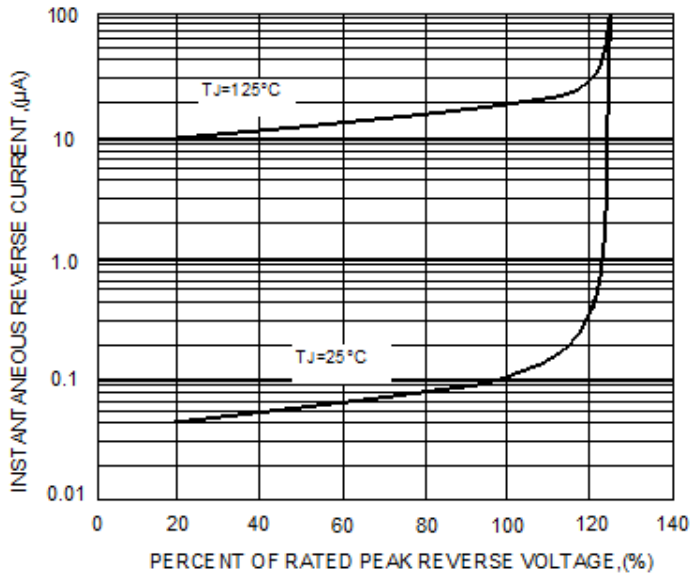


FIG.4-TYPICAL FORWARD CHARACTERISTICS



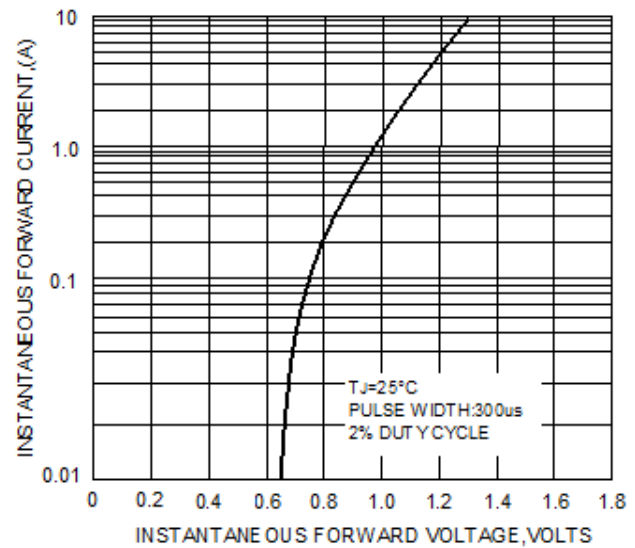

**Package Outline Dimensions**

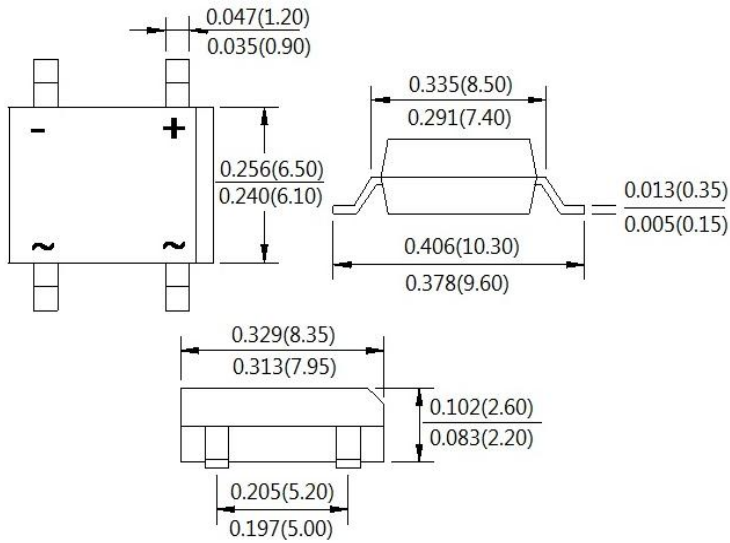


**DFS**

Dimensions in inches and (millimeters)

**Suggested Pad Layout**

Symbol	Outline	DFS millimeters
A		5.12
B		8.73
C		2.22
D		1.20

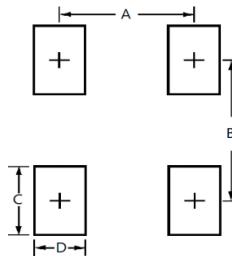

**Tap & Reel Specification**

Item	Symbol	Dimension
		Unit (mm)
Carrier width	A	8.64 ±0.1
Carrier length	B	10.41 ±0.1
Carrier depth	C	3.81 ±0.1
Sprocket hole	d	1.55 ±0.05
Reel outside diameter	D	330±1.0
Feed hole diameter	D0	13.5+1 /-0.5
Reel inner diameter	D1	75±1.0
Sprocket hole position	E	1.75±0.1
Punch hole position	F	7.50±0.05
Sprocket hole pitch	P	12.0±0.1
Sprocket hole pitch	P0	4.0±0.1
Embossment center	P1	2.0±0.05
Overall tape thickness	T	0.34 ±0.1
Tape width	W	12±0.15
Reel width	W1	17±1.0

