

# DIODE(THREE PHASES BRIDGE TYPE)

# DF40AA120/160

TOP





UL;E76102 (M)

Power Diode Module DF40AA is designed for three phase full wave rectification, which has six diodes connected in a three phase bridge configuration. The mounting base of the module is electrically isolated from semiconductor elements for simple heatsink construction output DC current is 40Amp (Tc=116°C) Repetitive peak reverse voltage is up to 1,600V.

- TjMax=150°C
- Isolated Mounting Base
- High reliability by unique glass passivation

**(Applications)**

AC. DC Motor Drive/AVR/Switching  
—for three phase rectification

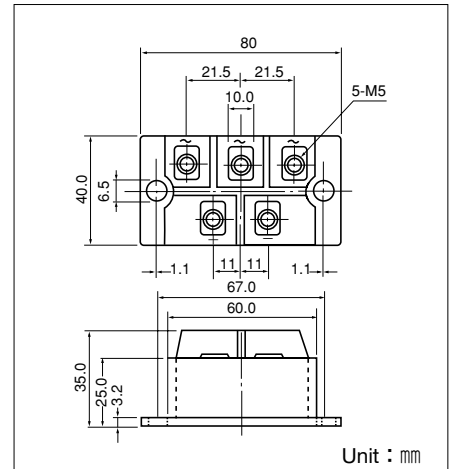

**Maximum Ratings**

(Tj=25°C unless otherwise specified)


Symbol	Item	Ratings		Unit
		DF40AA120	DF40AA160	
VRRM	Repetitive Peak Reverse Voltage	1200	1600	V
VRSM	Non-Repetitive Peak Reverse Voltage	1300	1700	V

Symbol	Item	Conditions	Ratings	Unit	
Id	Output current (D.C.)	Three phase. full wave. Tc=116°C	40	A	
IFSM	Surge Forward Current	1 cycle, 50/60Hz, peak value, non-repetitive	640/700	A	
Tj	Junction Temperature		-40 to +150	°C	
Tstg	Storage Temperature		-40 to +125	°C	
Viso	Isolation Breakdown Voltage (R.M.S.)	Main Terminal to case 1minute	2500	V	
	Mounting Torque	Mounting (M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)	N·m (kgf·cm)
		Terminal (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	
	Mass	Typical Value	200	g	


**Electrical Characteristics**

Symbol	Item	Conditions	Ratings	Unit
IRRM	Repetitive Peak Reverse Current, max.	Tj=150°C at VRRM	8.0	mA
VFM	Forward Voltage Drop, max.	IFM=40A, Tj=25°C Inst. measurement	1.3	V
Rth(j-c)	Thermal Impedance, max.	Junction to case	0.32	°C/W


Forward Voltage Drop max.

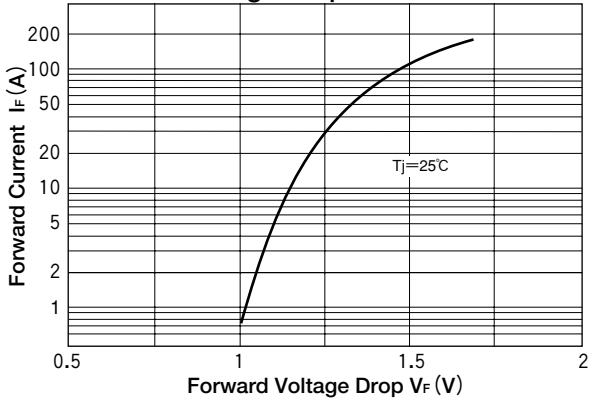


Output Current vs. Power Dissipation, max. (Three phase, full wave)

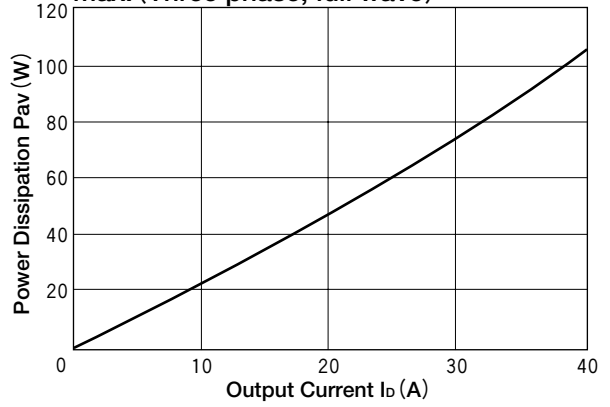

Output Current vs. Allowable case Temp

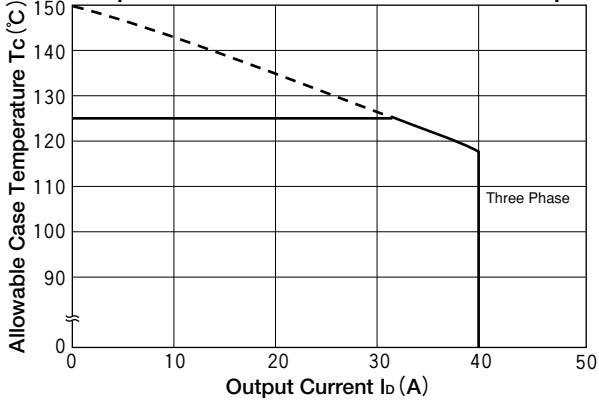

Cycle Surge Forward Current Rating (Non-Repetitive)

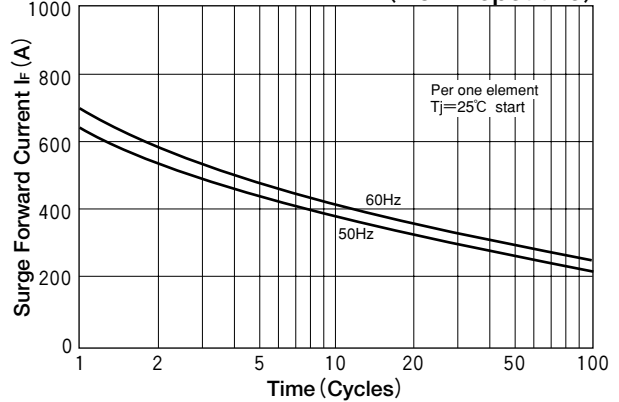

Transient Thermal Impedance (max)

