



DFPADD

Floating Point Pipelined Adder Unit

ver 2.50

www.DataSheet4U.com

OVERVIEW

The DFPADD uses the **pipelined** mathematics algorithm to compute sum of two arguments. The input numbers format is according to IEEE-754 standard. DFPADD supports single precision real number. Add operation was pipelined up to 5 levels. Input data are fed every clock cycle. The first result appears after 5 clock periods latency and next results are available **each clock** cycle. Full IEEE-754 precision and accuracy were included.

APPLICATION

- Math coprocessors
- DSP algorithms
- Embedded arithmetic coprocessor
- Data processing & control

KEY FEATURES

- Full IEEE-754 compliance
- Single precision real format support
- Simple interface
- No programming required
- 5 levels pipeline
- Full accuracy and precision
- Results available at every clock
- Overflow, underflow and invalid operation flags
- Fully configurable

All trademarks mentioned in this document are trademarks of their respective owners.

- Fully synthesizable, static synchronous design with no internal tri-states

DELIVERABLES

- ◆ Source code:
 - ◇ VHDL Source Code or/and
 - ◇ VERILOG Source Code or/and
 - ◇ Encrypted, or plain text EDIF netlist
- ◆ VHDL & VERILOG test bench environment
 - ◇ Active-HDL automatic simulation macros
 - ◇ NCSim automatic simulation macros
 - ◇ ModelSim automatic simulation macros
 - ◇ Tests with reference responses
- ◆ Technical documentation
 - ◇ Installation notes
 - ◇ HDL core specification
 - ◇ Datasheet
- ◆ Synthesis scripts
- ◆ Example application
- ◆ Technical support
 - ◇ IP Core implementation support
 - ◇ 3 months maintenance
 - Delivery the IP Core updates, minor and major versions changes
 - Delivery the documentation updates
 - Phone & email support

LICENSING

Comprehensible and clearly defined licensing methods without royalty fees make using of IP Core easy and simply.

Single Design license allows using IP Core in single FPGA bitstream and ASIC implemen-

<http://www.DigitalCoreDesign.com>
<http://www.dcd.pl>


tation. It also permits FPGA prototyping before ASIC production.

Unlimited Designs license allows using IP Core in unlimited number of FPGA bitstreams and ASIC implementations.

In all cases number of IP Core instantiations within a design, and number of manufactured chips are unlimited. There is no time of use limitations.

- Single Design license for
 - VHDL, Verilog source code called HDL Source
 - Encrypted, or plain text EDIF called Netlist
- Unlimited Designs license for
 - HDL Source
 - Netlist
- Upgrade from
 - Netlist to HDL Source
 - Single Design to Unlimited Designs


SYMBOL

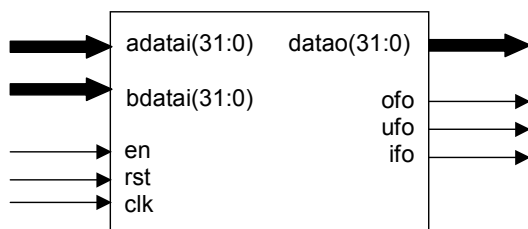

PINS DESCRIPTION

PIN	TYPE	DESCRIPTION
clk	Input	Global system clock
rst	Input	Global system reset
en	Input	Enable computing
adatai[31:0]	Input	A data bus input
bdatai[31:0]	Input	B data bus input
datao[31:0]	Output	Data bus output
ofo	Output	Overflow flag
ufo	Output	Underflow flag
ifo	Output	Invalid result flag

BLOCK DIAGRAM

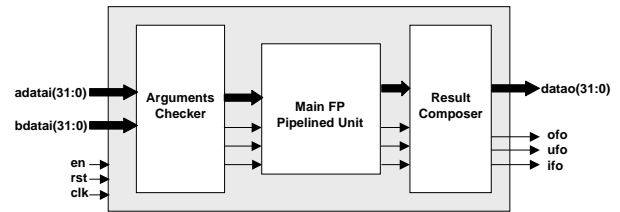

Arguments Checker - performs input data analyze against IEEE-754 number standard compliance. The appropriate numbers and information about the input data classes are given as the results to Main FP Pipelined Unit.

Main FP Pipelined Unit - performs floating point add function. Gives the complex information about the results and makes final flags settings.

Result Composer - performs result rounding function, data alignment to IEEE-754 standard, and the final flags setting.

PERFORMANCE

The following table gives a survey about the Core area and performance in the ALTERA® devices after Place & Route :

Device	Speed grade	Logic Cells	F _{max}
FLEX10KE	-1	1110	47 MHz
ACEX1K	-1	1110	47 MHz
APEX20K	-1	955	55 MHz
APEX20KE	-1	955	52 MHz
APEX20KC	-7	955	68 MHz
APEX-II	-7	955	88 MHz
MERCURY	-5	975	117 MHz
STRATIX	-5	845	107 MHz
CYCLONE	-6	845	104 MHz
STRATIX-II	-3	690	153 MHz
CYCLONE-II	-6	845	105 MHz

Core performance in ALTERA® devices

CONTACTS

For any modification or special request please contact to Digital Core Design or local distributors.

Headquarters:

Wroclawska 94

41-902 Bytom, POLAND

e-mail: info@dcd.pl

tel. : +48 32 282 82 66

fax : +48 32 282 74 37

www.DataSheet4U.com

Distributors:

Please check <http://www.dcd.pl/apartn.php>