




DG332K

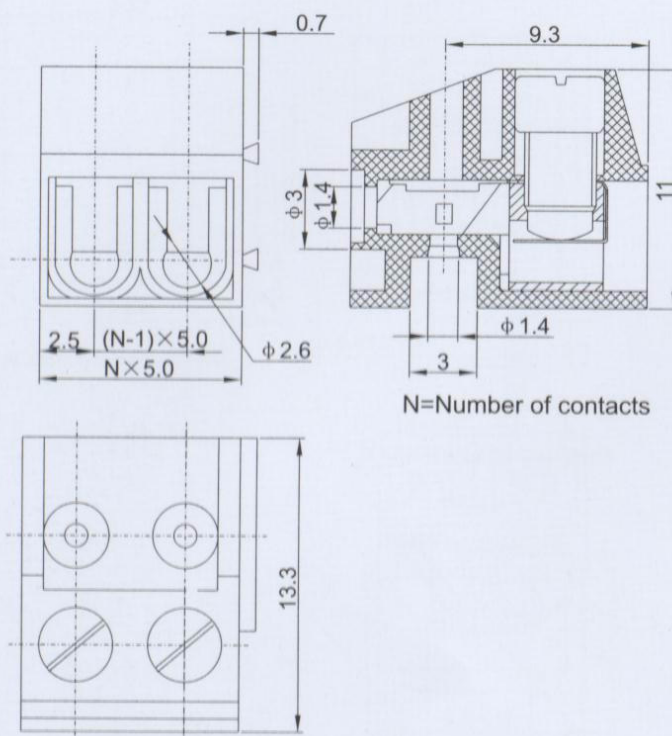

Pitch:5mm,10mm

Material

Screws : M2.5 steel Zinc plated
Wire guard : Phosphor bronze Ni plated
Housing : PBT, UL94V-0

Electrical

Rated voltage : 250V
Rated current : 10A
Contact resistance : $20\text{m}\Omega$
Insulation resistance: $5000\text{M}\Omega/1000\text{V}$
Withstanding voltage: AC1500V/1Min
Wire range : 28-16AWG 1.5mm^2

Mechanical

Temp Range : $-30^\circ\text{C} \sim +120^\circ\text{C}$
MAX Soldering: $+250^\circ\text{C}$, for 5 Sec.
Torque : 0.4Nm (3.6lb.in)
Strip length : 4.5mm