



Peripheral/Power Drivers

DH0008/DH0008C*

high voltage, high current driver

general description

The DH0008/DH0008C is an integrated high voltage, high current driver, designed to accept standard DTL or TTL input levels and provide a pulsed load of up to 3A from a continuous supply voltage up to 45V. AND inputs are provided with an EXPANDER connection, should additional gating be required.

Since one side of the load is normally grounded, there is less likelihood of false turn-on due to an inadvertent short in the drive line.

The high pulse current capability makes the DH0008/DH0008C ideal for driving nonlinear resistive loads such as incandescent lamps. The

*Previously called NH0008/NH0008C




circuit also requires only one power supply for circuit functional operation.

The DH0008 is available in a 10-pin TO-5 package; the DH0008C is also available in a 10-pin TO-5, in addition to a 10-lead molded dual-in-line package.

features


- Operation from a Single +10V to +45V Power Supply.
- Low Standby Power Dissipation of only 35 mW for 28V Power Supply.
- 3.0A, 50 ms, Pulse Current Capability.

schematic and connection diagrams

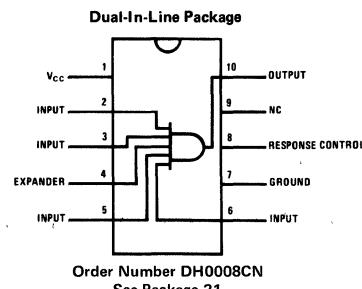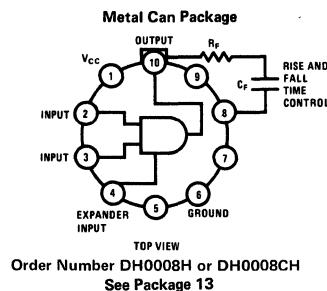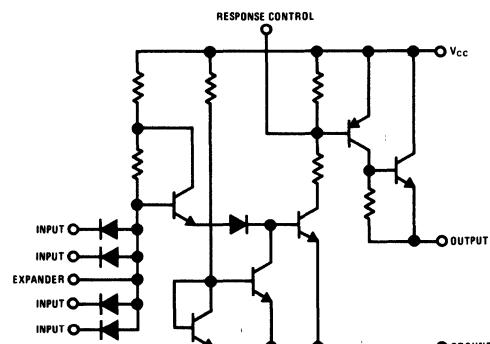

typical application

Controller for Closed Loop Stepper Motor

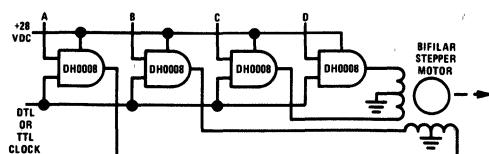

Switching Sequence

Step	A	B	C	D
1	1	0	1	0
2	1	0	0	1
3	0	1	0	1
4	0	1	1	0
5	1	0	1	0

To reverse the direction use a 4, 3, 2, 1 sequence

absolute maximum ratings

Peak Power Supply Voltage (for 0.1 sec)	60V
Continuous Supply Voltage	45V
Input Voltage	5.5V
Input Extender Current	5.0 mA
Peak Output Current (50 msec On/1 sec Off)	3.0 Amp
Continuous Output Current (See continuous operating curves.)	
Operating Temperature DH0008	-55°C to +125°C
DH0008C	0°C to +70°C
Storage Temperature	-65°C to +150°C

electrical characteristics (Note 1)

PARAMETER	CONDITIONS	MIN	TYP (Note 2)	MAX	UNITS
Logical "1" Input Voltage	$V_{CC} = 45V$ to 10V	2.0			V
Logical "0" Input Voltage	$V_{CC} = 45V$ to 10V			0.8	V
Logical "1" Output Voltage 50 ms On/1 sec Off	$V_{CC} = 45V$, $V_{IN} = 2.0V$, $I_{OUT} = 1.6A$	43	43.5		V
Logical "0" Output Voltage	$V_{CC} = 45V$, $V_{IN} = 0.8V$, $R_L = 1K$		0.02	0.1	V
Logical "1" Output Voltage 50 ms On/1 sec Off	$V_{CC} = 28V$, $V_{IN} = 2.0V$, $I_{OUT} = 0.8A$	26.5	27.1		V
Logical "0" Input Current	$V_{CC} = 45V$, $V_{IN} = 0.4V$		-0.8	-1.0	mA
Logical "1" Input Current	$V_{CC} = 45V$, $V_{IN} = 2.4V$		0.5	5.0	μA
	$V_{CC} = 45V$, $V_{IN} = 5.5V$			100	μA
"Off" Power Supply Current	$V_{CC} = 45V$, $V_{IN} = 0V$		1.6	2.0	mA
Rise Time	$V_{CC} = 28V$, $R_L = 39Ω$, $V_{IN} = 5.0V$		0.2		μs
Fall Time	$V_{CC} = 28V$, $R_L = 39Ω$, $V_{IN} = 5.0V$		3.0		μs
T_{ON}	$V_{CC} = 28V$, $R_L = 39Ω$, $V_{IN} = 5.0V$		0.4		μs
T_{OFF}	$V_{CC} = 28V$, $R_L = 39Ω$, $V_{IN} = 5.0V$		7.0		μs


Note 1: Unless otherwise specified limits shown apply from -55°C to 125°C for DH0008 and 0°C to 70°C for DH0008C.

Note 2: Typical values are 25°C ambient

Note 3: Power ratings for the TO-5 based on a maximum junction temperature of +175°C and a ϕ_JA of 210°C/w


Note 4: Power ratings for the DH0008CN Molded DIP based on a maximum junction temperature of 150°C and a thermal resistance of 150°C/w when mounted in a standard DIP socket

Note 5: Power ratings for the DH0008CN Molded DIP based on a maximum junction temperature of 150°C and a thermal resistance of 115°C/w when mounted on a 1/16 inch thick, epoxy-glass board with ten 0.03 inch wide 2 ounce copper conductors.

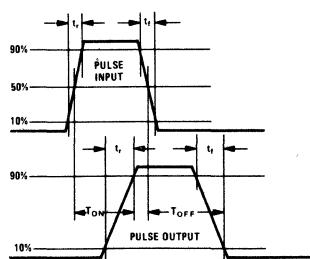
switching time waveforms

typical performance


Maximum Continuous Output Current for TO-5 Package

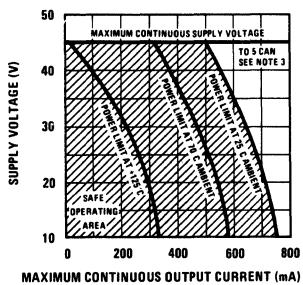


Maximum Continuous Output Current for Molded DIP

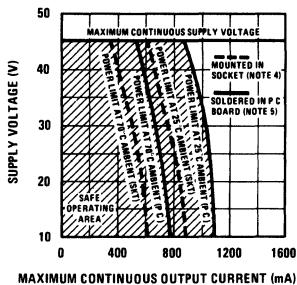


Available Output Current

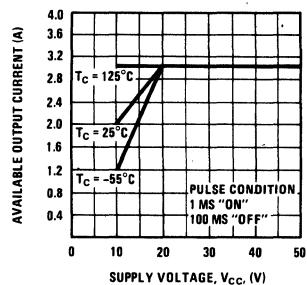


Output Saturation Voltage

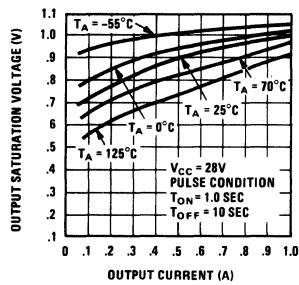


Input Threshold Voltage vs Temperature

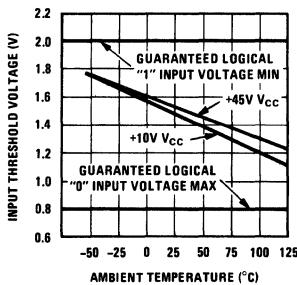


Logical "0" Input Current

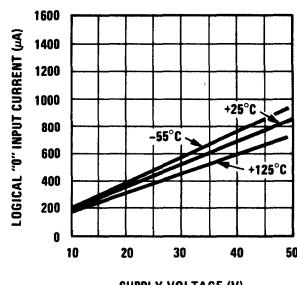


ON Supply Current Drain

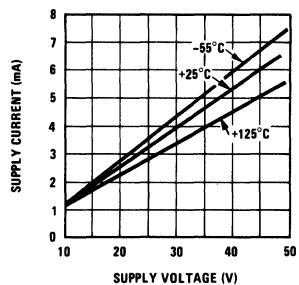


OFF Supply Current Drain

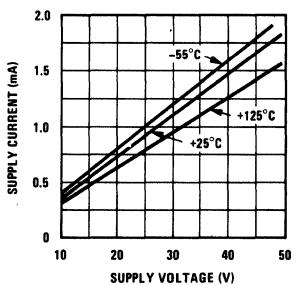


Turn OFF and Fall Times

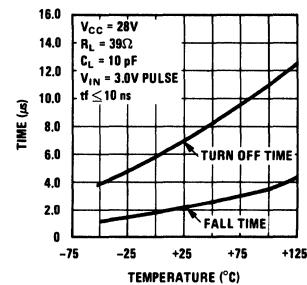

Turn ON Control

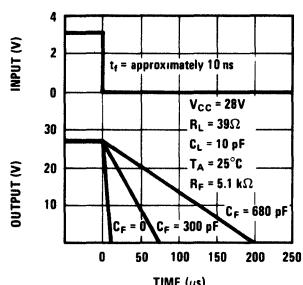

Turn OFF Control

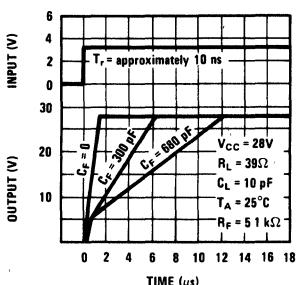

Turn ON and Rise Time

