

Fast Recovery Rectifier


DHG30IM600PC

FEATURES

- With TO-263(D²PAK) Package
- Very short recovery time
- High surge current capability
- Minimum Lot-to-Lot variations for robust device performance and reliable operation


APPLICATIONS

- Anti-parallel diode for high frequency switching devices
- Uninterruptible Power Supplies (UPS)
- Rectifiers in switch mode power supplies (SMPS)

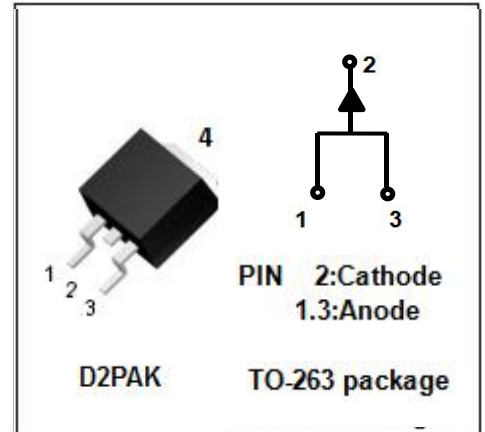

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{RRM} V _{VRWM} V _R	Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	600	V
I _{F(AV)}	Average Rectified Forward Current	30	A
I _{FSM}	Nonrepetitive Peak Surge Current@45°C (Surge applied at rated load conditions half-wave, single phase, 60Hz)	200	A
P _D	Maximum power dissipation	210	W
T _J	Junction Temperature	-55~150	°C
T _{stg}	Storage Temperature Range	-55~150	°C

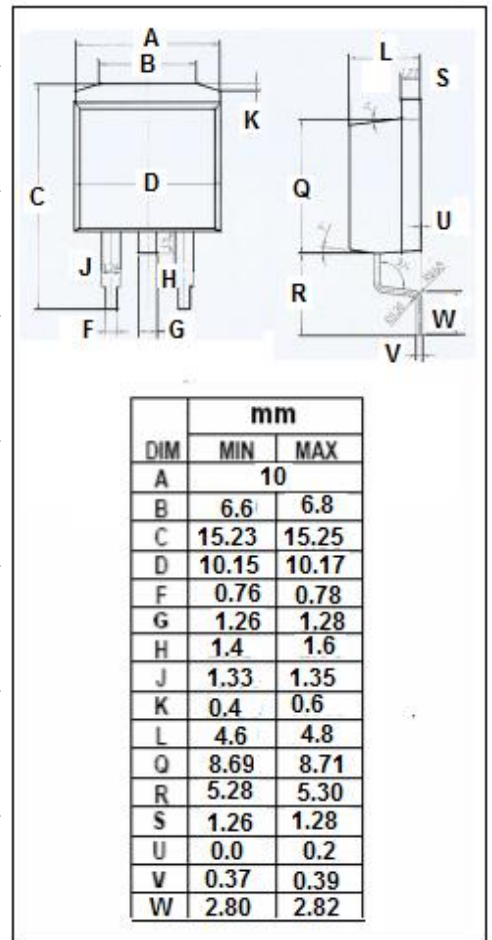

Fast Recovery Rectifier
DHG30IM600PC
THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	0.6	$^{\circ}C/W$

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}C$) (Pulse Test: Pulse Width=300 μ s, Duty Cycle \leq 2%)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V_F^*	Maximum Instantaneous Forward Voltage	$I_F=30A; T_J=25^{\circ}C$ $I_F=30A; T_J=125^{\circ}C$ $I_F=60A; T_J=25^{\circ}C$ $I_F=60A; T_J=125^{\circ}C$	2.26 2.22 3.11 3.20	V
I_R^*	Maximum Instantaneous Reverse Current	$V_R=V_{RWM}; T_J=25^{\circ}C$ $V_R=V_{RWM}; T_J=125^{\circ}C$	50 4000	μA
t_{rr}	Maximum Reverse Recovery Time	$I_F=35A; di/dt=60A/\mu s$	35	ns

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.