

DIO2361AL

Ultra Low Vos, Low Power Amplifier

Features


- Ultra low V_{OS} : DIO2361ALA: 10 μ V(Max)
DIO2361ALB: 20 μ V(Max)
DIO2361AL: 40 μ V(Max)
DIO2361ALM: 65 μ V(Max)
- Low Power: 7.0 μ A(typ.)
- Unity Gain Stable
- Gain Bandwidth Product: 110kHz(typ.)
- Wide supply range: 1.8V to 5.5V
- Available in SOT23-5 and SC70-5 packages
- Temperature Range:
 - Industrial: -40°C to 85°C
 - Extended: -40°C to 125°C

Descriptions

DIO2361AL is an ultra low V_{OS} operational amplifier, with rail-to-rail CMOS input/output and single/dual channels selectable. DIO2361AL has a gain-bandwidth product of 110kHz(typ.), wide operating supply voltage from 1.8V to 5.5V and broad output voltage swing.

DIO2361AL consumes ultra low power, with 7.0 μ A(typ.) of bias current, which makes DIO2361AL be ideal for battery powered device, temperature-sense device, etc.

Typical Applications

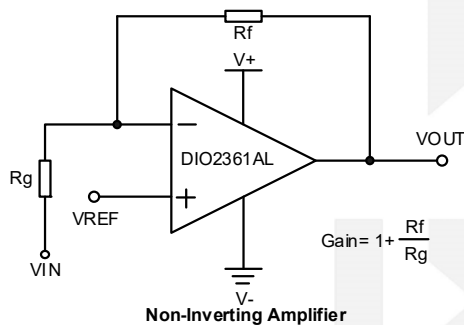

Applications

- Portable Equipment
- Active Filters
- Data Acquisition
- Test Equipment
- Broadband Communication
- Process Control
- Audio and Video Processing

Ordering Information

Order Part Number	Top Marking		T _A	Package	
DIO2361ALASC5	W6LA	Green or RoHS	-40 to 125°C	SC70-5	Tape & Reel, 3000
DIO2361ALAST5	W6LA	Green or RoHS	-40 to 125°C	SOT23-5	Tape & Reel, 3000
DIO2361ALBSC5	W6LA	Green or RoHS	-40 to 125°C	SC70-5	Tape & Reel, 3000
DIO2361ALBST5	W6LA	Green or RoHS	-40 to 125°C	SOT23-5	Tape & Reel, 3000
DIO2361ALSC5	W6LA	Green or RoHS	-40 to 125°C	SC70-5	Tape & Reel, 3000
DIO2361ALST5	W6LA	Green or RoHS	-40 to 125°C	SOT23-5	Tape & Reel, 3000
DIO2361ALMSC5	W6LA	Green or RoHS	-40 to 125°C	SC70-5	Tape & Reel, 3000
DIO2361ALMST5	W6LA	Green or RoHS	-40 to 125°C	SOT23-5	Tape & Reel, 3000

Ordering Information Complimentary Note

Ordering Code = Part No. + Package Code

SC5: stands for SC70-5
ST5: stands for SOT23-5

DIO2361ALA
DIO2361ALB
DIO2361AL
DIO2361ALM

Pin Assignments




Figure 1 Top View

Pin Description

Pin name	Description
V+	Positive supply
V-	Negative supply
+IN	Positive Input
-IN	Negative Input
OUT	Output
NC	No connect



DIO2361AL

Ultra Low Vos, Low Power Amplifier

Absolute Maximum Ratings

Stresses beyond those listed under "Absolute Maximum Rating" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Parameter		Rating	Unit
Supply Voltage ($V+$ – $V-$)		7	V
Input Voltage		($V-$)-0.3V to ($V+$)+0.3V	V
Difference Input Voltage		$ V+ - V- $	V
Storage Temperature Range		-65 to 150	°C
Junction Temperature		150	°C
Lead Temperature Range		260	°C
ESD	HBM, JEDEC: JESD22-A114	8	kV

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation to ensure optimal performance to the datasheet specifications. DIOO does not recommend exceeding them or designing to Absolute Maximum Ratings.

Parameter		Rating	Unit
Supply Voltage		1.8 to 5.5	V
Input Voltage		0 to 5	V
Operating Temperature Range		-40 to 125	°C

Electrical Characteristics

Typical value: $V_+ = 5V$, $R_L = 1M\Omega$ to $V_+/2$, $V_{CM} = 1/2 V_+$, $T_A = 25^\circ C$, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
INPUT CHARACTERISTICS						
V _{OS}	Input Offset Voltage	V+=1.8V to 5.5V	DIO2361ALA	-10	10	μV
			DIO2361ALB	-20	20	
			DIO2361AL	-40	40	
			DIO2361ALM	-65	65	
I _B	Input Bias Current	V+=1.8V to 5.5V		1		pA
I _{OS}	Input Offset Current	V+=1.8V to 5.5V		1		pA
V _{CM}	Common Mode Voltage Range		-0.1		(V+) +0.1	V
CMRR	Common Mode Rejection Ratio	-40°C≤T _A ≤125°C		130		dB
A _{OL}	Open Loop Voltage Gain	R _L =50kΩ, V _O = 0.1 to (V+)-0.1	80	110		dB
ΔV _{OS} /ΔT	Input Offset Voltage Drift	-40°C≤T _A ≤125°C		0.02		μV/°C
OUTPUT CHARACTERISTICS						
V _{OH}	Output Voltage High	R _L =50kΩ, -40°C≤T _A ≤125°C		4.992		V
V _{OL}	Output Voltage Low	R _L =50kΩ, -40°C≤T _A ≤125°C		8		mV
I _{SC}	Output Short Circuit Current	Source I _{SC} , V+=5V		34		mA
		Sink I _{SC} , V+=5V		34		
POWER SUPPLY						
PSRR	Power Supply Rejection Ration		100			dB
I _S	Supply Current per Channel/Amp	-40°C≤T _A ≤125°C		7	11	μA
DYNAMIC PERFORMANCE						
GBP	Gain Bandwidth Product	C _L =100pF, R _L =1MΩ		110		kHz
SR	Slew Rate	G=1, 2V Output Step		80		V/ms
t _s	Setting Time	G=1, 2V Output Step		2		ms
Θ _m	Phase Margin			70		Deg
tr	Overload Recovery Time			3.9		ms


NOISE PERFORMANCE

THD	Total Harmonic Distortion	f=1kHz, 4V _{PP} , R _L =5kΩ		0.33		%
e _n	Voltage Noise Density	f=1kHz		100		nV/√Hz


Specifications subject to change without notice.

Typical Performance Characteristics


I_s vs. V_{CC}

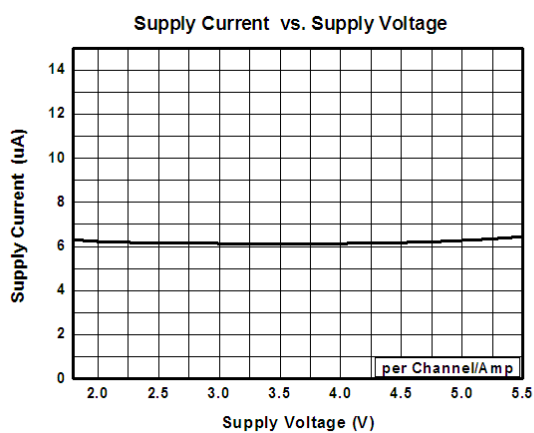


I_s vs. Temperature

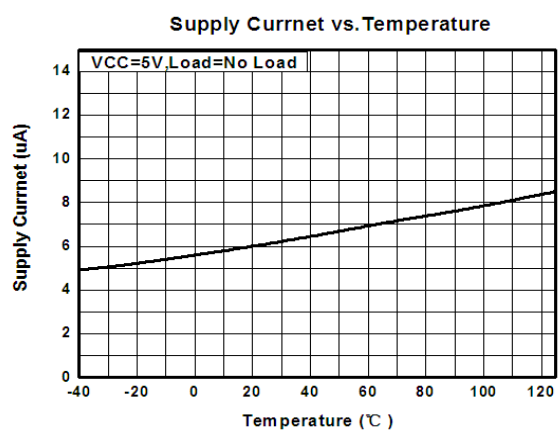

V_{os} vs. V_{CC}

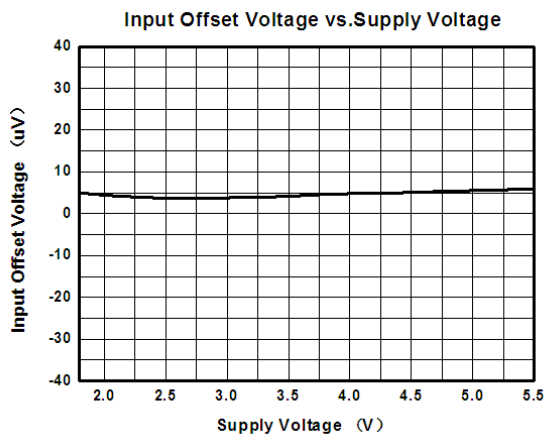


V_{os} vs. Temperature

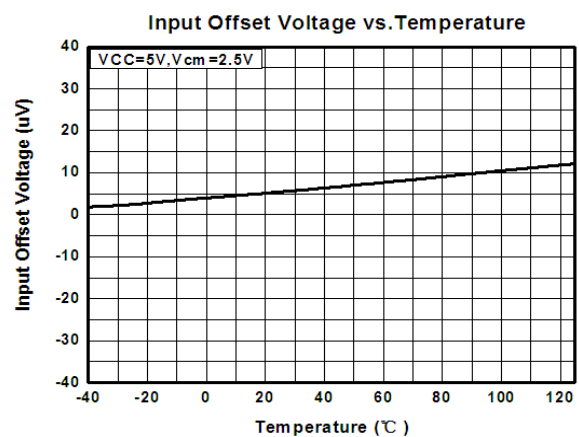


Typical Performance Characteristics (Continue)


Small-signal Response
($V_{CC}=5V$, $C_L=200pF$)

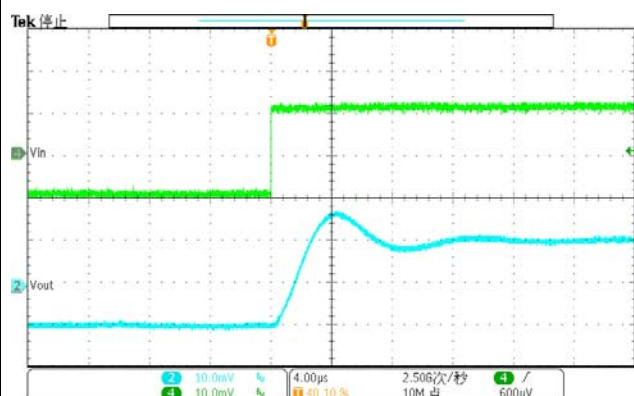

Small-signal Response
($V_{CC}=5V$, $C_L=200pF$)

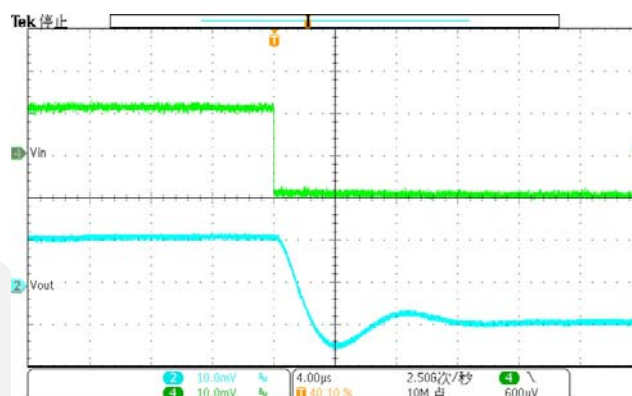

Large-signal Response
($V_{CC}=5V$, $R_L=5.1k\Omega$)

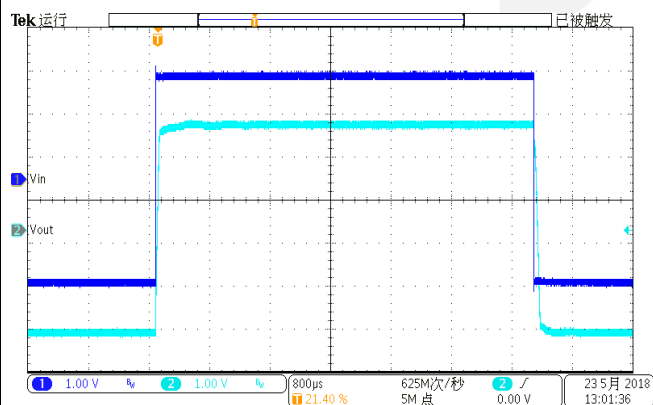

CONTACT US

Dioo is a professional design and sales corporation for high-quality and performance analog semiconductors. The company focuses on industry markets, such as, cell phone, handheld products, laptop, and medical equipment and so on. Dioo's product families include analog signal processing and amplifying, LED drivers and charger IC. Go to <http://www.dioo.com> for a complete list of Dioo product families.

For additional product information, or full datasheet, please contact with our Sales Department or Representatives.