



Display Drivers

DM5441A/DM7441A

DM5441A/DM7441A BCD to decimal decoder/nixie* driver


general description

The DM5441A/DM7441A is monolithic binary-coded-decimal to decimal decoder. The BCD number to be decoded is applied to the four input lines; and the unique output corresponding to the decimal equivalent of the input number falls to a logical 0 level. Outputs are designed to drive gas-filled-readout (Nixie*) tubes but are also

able to operate with other low current lamps and relays.

An over-range feature provides that if binary numbers between 10 and 15 are applied to the input the least significant bit of these numbers (0 through 5) will be decoded on the output.

connection diagram

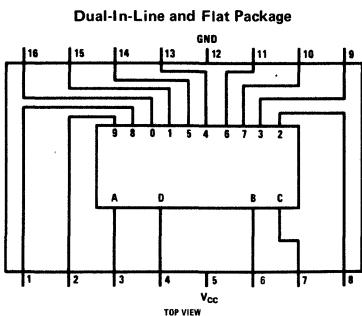

Order Number DM5441AJ
or DM7441AJ
See Package 17


Order Number DM5441IN
See Package 23

Order Number DM5441AW
See Package 28

logic table


| INPUT | | | | LOW OUTPUT |
|--------------|---|---|---|------------|
| D | C | B | A | |
| 0 | 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 1 | 1 |
| 0 | 0 | 1 | 0 | 2 |
| 0 | 0 | 1 | 1 | 3 |
| 0 | 1 | 0 | 0 | 4 |
| 0 | 1 | 0 | 1 | 5 |
| 0 | 1 | 1 | 0 | 6 |
| 0 | 1 | 1 | 1 | 7 |
| 1 | 0 | 0 | 0 | 8 |
| 1 | 0 | 0 | 1 | 9 |
| (OVER RANGE) | | | | |
| 1 | 0 | 1 | 0 | 0 |
| 1 | 0 | 1 | 1 | 1 |
| 1 | 1 | 0 | 0 | 2 |
| 1 | 1 | 0 | 1 | 3 |
| 1 | 1 | 1 | 0 | 4 |
| 1 | 1 | 1 | 1 | 5 |

typical applications

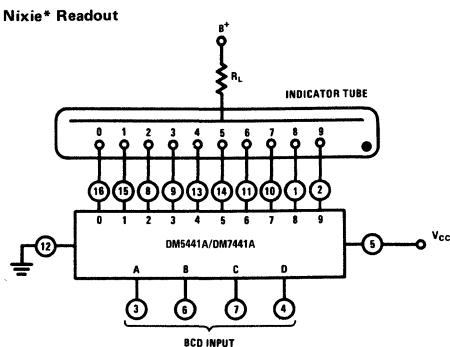

Note: Values for B^+ and R_L are as specified by the tube manufacturer.

Over-Range Decoding

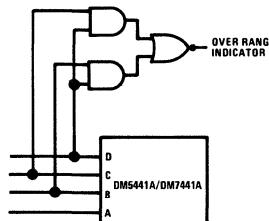

*Trademark of Burroughs Corporation

absolute maximum ratings

| | |
|--------------------------------------|-----------------|
| Supply Voltage (V_{CC}) | 7.0V |
| Output Voltage | 70V |
| Input Voltage | 5.5V |
| Operating Temperature Range | -55°C to +125°C |
| DM5441A | 0°C to +70°C |
| Storage Temperature Range | -65°C to +150°C |
| Lead Temperature (Soldering, 10 sec) | 300°C |

electrical characteristics (Note 1)

| PARAMETER | CONDITIONS | MIN | TYP (Note 2) | MAX | UNITS |
|---|--------------------------|---------------------------|----------------------------------|------|-------|
| Logical 1 Input Voltage | DM5441A $V_{CC} = 4.5V$ | 2.0 | | 0.8 | V |
| | DM7441A $V_{CC} = 4.75V$ | | | | |
| Logical 0 Input Voltage | DM5441A $V_{CC} = 4.5V$ | | 3 | 40 | V |
| | DM7441A $V_{CC} = 4.75V$ | | | | |
| Logical 1 Input Current (all inputs) | DM5441A $V_{CC} = 5.5V$ | | V _{IN} = 2.4V | 1 | μA |
| | DM7441A $V_{CC} = 5.25V$ | | | | |
| Logical 1 Input Current | DM5441A $V_{CC} = 5.5V$ | | V _{IN} = 5.5V | -1.0 | mA |
| | DM7441A $V_{CC} = 5.25V$ | | | | |
| Logical 0 Input Current | DM5441A $V_{CC} = 5.5V$ | | V _{IN} = 0.4V | -1.6 | mA |
| | DM7441A $V_{CC} = 5.25V$ | | | | |
| Supply Current | DM5441A $V_{CC} = 5.5V$ | | V _{IN} = 0.0V | 21 | mA |
| | DM7441A $V_{CC} = 5.25V$ | | | | |
| Logical 1 Output Breakdown | DM5441A $V_{CC} = 5.5V$ | I _{OUT} = 1.0 mA | 70 | 85 | V |
| | DM7441A $V_{CC} = 5.25V$ | | | | |
| Logical 1 Output Current | DM5441A $V_{CC} = 5.5V$ | V _{OUT} = 50V | 125° 70° 25° 0° -55° | 1.8 | μA |
| | DM7441A $V_{CC} = 5.25V$ | | | | |
| Logical 0 Output Voltage | DM5441A $V_{CC} = 4.5V$ | I _{OUT} = 7 mA | 125° 70° 25° 0° -55° | 1.4 | V |
| | DM7441A $V_{CC} = 4.75V$ | | | | |

Note 1: Unless otherwise specified min/max limits apply across the -55°C to +125°C temperature range for the DM5441A, and the 0°C to +70°C temperature range for the DM7441A.

Note 2: All typicals apply at 25°C for $V_{CC} = 5V$.