

DP 2012 Series

Multilayer Chip Diplexers

Features

- ❖ Monolithic structure including one low-pass and one band-pass filters with loss pole at adjacent passband.

Applications

- ❖ Dual-band / dual-mode 2.4GHz/5GHz WLAN



Specifications

Part Number	Passband (MHz)	Insertion Loss (dB)	Passband VSWR	Attenuation (dB)
DP2012-E2455MD	2400~2500	0.5 max.	2.0 max.	20 min. @ 4.6 ~ 6.0GHz 20 min. @ 6.9 ~ 7.5GHz
	5150~5850	1.8 max.	2.0 max.	20 min. @ 2.3 ~ 2.5GHz 20 min. @ 3.3 ~ 3.8GHz 20 min. @ 6.86 ~ 7.8GHz 20 min. @ 10.3 ~ 11.7GHz


Q'ty/Reel (pcs) : 4,000
 Operating Temperature Range : -40 ~ +85 °C
 Storage Temperature Range : +5 ~ +35 °C, Humidity 45~75%RH
 Storage Period : 12 months max.
 Power Capacity : 2W max.

Part Number

DP 2012 - E 2455 MD □ /LF
 ① ② ③ ④ ⑤ ⑥ ⑦



① Type	DP : Diplexer	② Dimensions (L x W)	2.0 x 1.2 mm
③ Material Code	E	④ Frequency Range	2455=2400MHz /5500MHz
⑤ Specification Code	MD	⑥ Packaging	T: Tape & Reel B: Bulk
⑦ Soldering	=lead-containing /LF=lead-free		

Terminal Configuration




No.	Terminal Name	No.	Terminal Name
①	Higher Freq. Port (P3)	④	GND
②	GND	⑤	Common Port (P2)
③	Lower Freq. Port (P1)	⑥	GND

Dimensions and Recommended PC Board Pattern

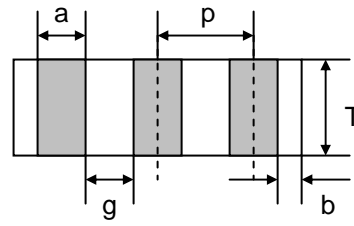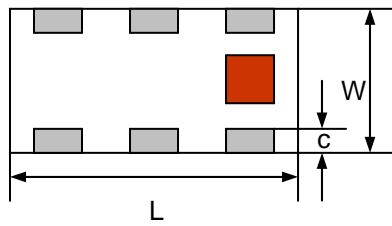


Unit : mm

Mark	L	W	T	a	b	c	g	p
Dimensions	2.0 ± 0.1	1.25 ± 0.1	0.95 ± 0.1	0.3 ± 0.1	0.2 ± 0.1	$0.3+0.1 / -0.2$	0.35 ± 0.1	0.65 ± 0.05

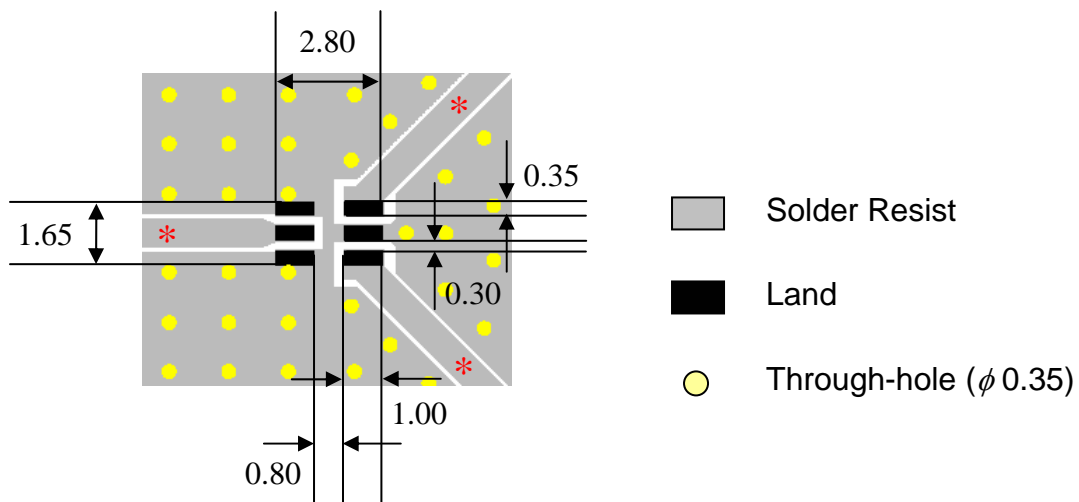


* Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

Measuring Diagram

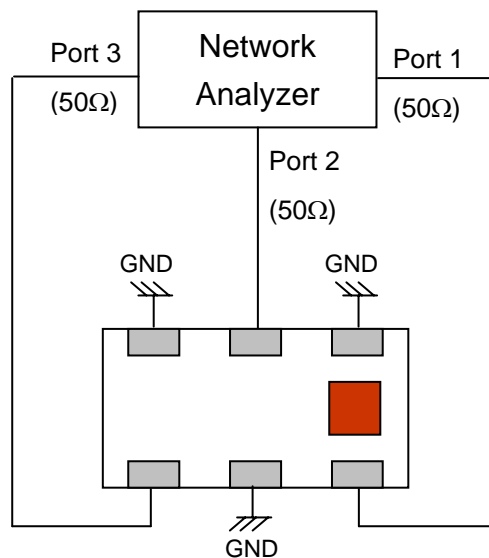


Typical Electrical Characteristics (T=25°C)

Attenuation

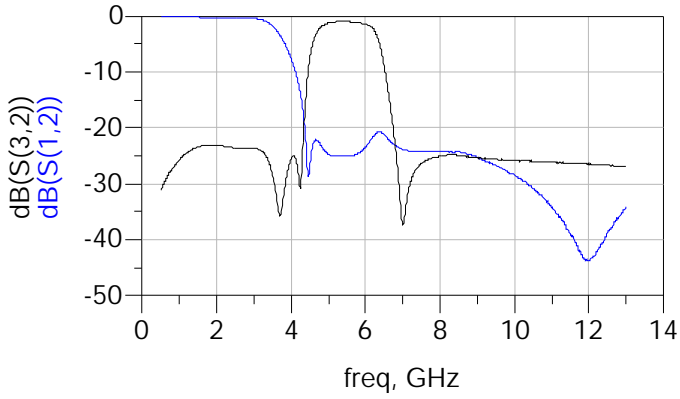

Return Loss

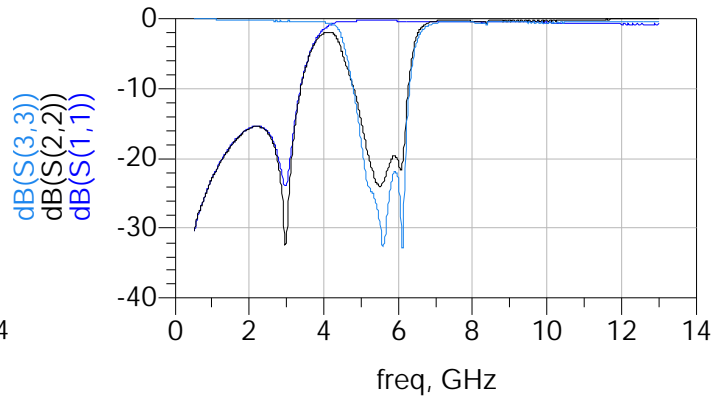

Notes

❖The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.

Advanced Ceramic X Corp.

16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan

TEL:886-3-5987008 FAX:886-3-5987001

E-mail: acx@acxc.com.tw <http://www.acxc.com.tw>