


**HiPerFRED<sup>2</sup>**

High Performance Fast Recovery Diode  
Low Loss and Soft Recovery  
Single Diode

Part number

DPG 15 I 300 PA

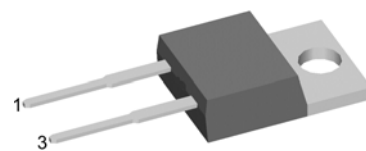

Backside: cathode

**Features / Advantages:**

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low  $I_{rm}$ -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low  $I_{rm}$  reduces:
  - Power dissipation within the diode
  - Turn-on loss in the commutating switch

**Applications:**

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

**Package:**


- Housing: TO-220
- Industry standard outline
- Epoxy meets UL 94V-0
- RoHS compliant

**Ratings**

| Symbol     | Definition                          | Conditions                                                                |     | min. | typ. | max. | Unit               |
|------------|-------------------------------------|---------------------------------------------------------------------------|-----|------|------|------|--------------------|
| $V_{RRM}$  | max. repetitive reverse voltage     | $T_{VJ} = 25^{\circ}\text{C}$                                             |     |      |      | 300  | V                  |
| $I_R$      | reverse current                     | $V_R = 300\text{ V}$<br>$T_{VJ} = 25^{\circ}\text{C}$                     |     |      |      | 1    | $\mu\text{A}$      |
|            |                                     | $V_R = 300\text{ V}$<br>$T_{VJ} = 150^{\circ}\text{C}$                    |     |      |      | 0.08 | mA                 |
| $V_F$      | forward voltage                     | $I_F = 15\text{ A}$<br>$T_{VJ} = 25^{\circ}\text{C}$                      |     |      |      | 1.26 | V                  |
|            |                                     | $I_F = 30\text{ A}$                                                       |     |      |      | 1.51 | V                  |
|            |                                     | $I_F = 15\text{ A}$<br>$T_{VJ} = 150^{\circ}\text{C}$                     |     |      |      | 1.01 | V                  |
|            |                                     | $I_F = 30\text{ A}$                                                       |     |      |      | 1.29 | V                  |
| $I_{FAV}$  | average forward current             | rectangular $d = 0.5$<br>$T_C = 140^{\circ}\text{C}$                      |     |      |      | 15   | A                  |
| $V_{F0}$   | threshold voltage                   | $T_{VJ} = 175^{\circ}\text{C}$<br>for power loss calculation only         |     |      |      | 0.69 | V                  |
| $r_F$      | slope resistance                    |                                                                           |     |      |      | 18   | m $\Omega$         |
| $R_{thJC}$ | thermal resistance junction to case |                                                                           |     |      |      | 1.70 | K/W                |
| $T_{VJ}$   | virtual junction temperature        |                                                                           | -55 |      |      | 175  | $^{\circ}\text{C}$ |
| $P_{tot}$  | total power dissipation             | $T_C = 25^{\circ}\text{C}$                                                |     |      |      | 90   | W                  |
| $I_{FSM}$  | max. forward surge current          | $t = 10\text{ ms}$ (50 Hz), sine<br>$T_{VJ} = 45^{\circ}\text{C}$         |     |      |      | 240  | A                  |
| $I_{RM}$   | max. reverse recovery current       | $T_{VJ} = 25^{\circ}\text{C}$                                             |     |      | 3    |      | A                  |
|            |                                     | $I_F = 15\text{ A}; V_R = 200\text{ V}$<br>$T_{VJ} = 125^{\circ}\text{C}$ |     |      | 6.5  |      | A                  |
| $t_{rr}$   | reverse recovery time               | $-di_F/dt = 200\text{ A}/\mu\text{s}$<br>$T_{VJ} = 25^{\circ}\text{C}$    |     |      | 35   |      | ns                 |
|            |                                     | $T_{VJ} = 125^{\circ}\text{C}$                                            |     |      | 55   |      | ns                 |
| $C_J$      | junction capacitance                | $V_R = 150\text{ V}; f = 1\text{ MHz}$<br>$T_{VJ} = 25^{\circ}\text{C}$   |     |      | 20   |      | pF                 |

| Symbol     | Definition                          | Conditions   | Ratings |      |      | Unit |
|------------|-------------------------------------|--------------|---------|------|------|------|
|            |                                     |              | min.    | typ. | max. |      |
| $I_{RMS}$  | RMS current                         | per terminal |         |      | 35   | A    |
| $R_{thCH}$ | thermal resistance case to heatsink |              |         | 0.50 |      | K/W  |
| $T_{stg}$  | storage temperature                 |              | -55     |      | 150  | °C   |
| Weight     |                                     |              |         | 2    |      | g    |
| $M_D$      | mounting torque                     |              | 0.4     |      | 0.6  | Nm   |
| $F_C$      | mounting force with clip            |              | 20      |      | 60   | N    |


## Product Marking

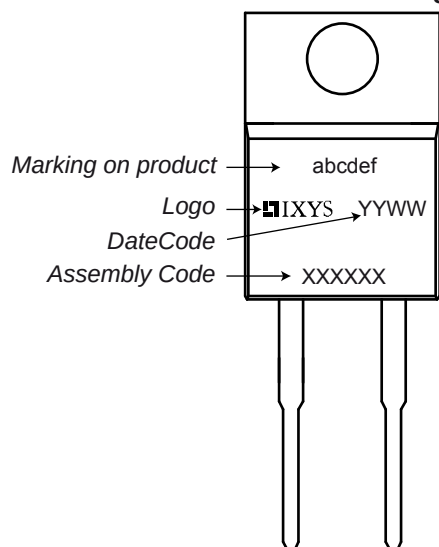

## Part number

D = Diode  
 P = HiPerFRED  
 G = extreme fast  
 15 = Current Rating [A]  
 I = Single Diode  
 300 = Reverse Voltage [V]  
 PA = TO-220AC (2)

| Ordering | Part Name       | Marking on Product | Delivering Mode | Base Qty | Code Key |
|----------|-----------------|--------------------|-----------------|----------|----------|
| Standard | DPG 15 I 300 PA | DPG15I300PA        | Tube            | 50       | 506633   |

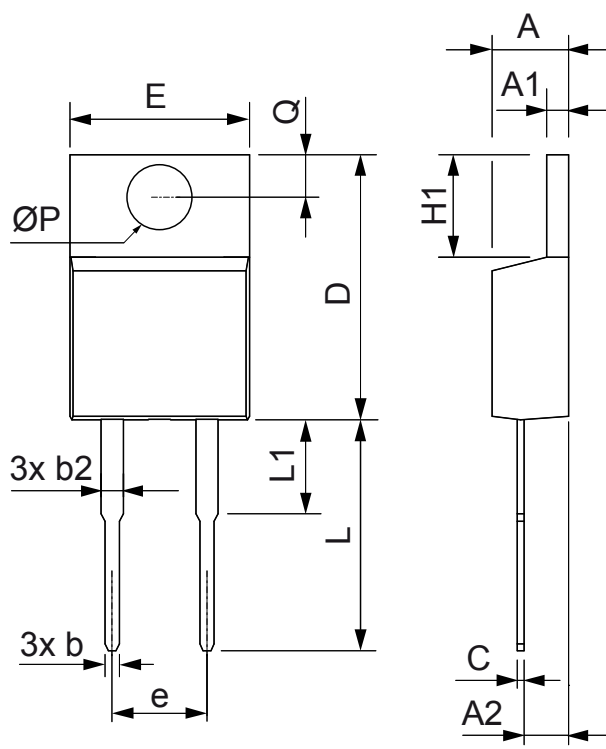**Outlines TO-220**


| Dim.            | Millimeter |       | Inches |       |
|-----------------|------------|-------|--------|-------|
|                 | Min.       | Max.  | Min.   | Max.  |
| A               | 4.32       | 4.82  | 0.170  | 0.190 |
| A1              | 1.14       | 1.39  | 0.045  | 0.055 |
| A2              | 2.29       | 2.79  | 0.090  | 0.110 |
| b               | 0.64       | 1.01  | 0.025  | 0.040 |
| b2              | 1.15       | 1.65  | 0.045  | 0.065 |
| C               | 0.35       | 0.56  | 0.014  | 0.022 |
| D               | 14.73      | 16.00 | 0.580  | 0.630 |
| E               | 9.91       | 10.66 | 0.390  | 0.420 |
| e               | 5.08       | BSC   | 0.200  | BSC   |
| H1              | 5.85       | 6.85  | 0.230  | 0.270 |
| L               | 12.70      | 13.97 | 0.500  | 0.550 |
| L1              | 2.79       | 5.84  | 0.110  | 0.230 |
| $\varnothing P$ | 3.54       | 4.08  | 0.139  | 0.161 |
| Q               | 2.54       | 3.18  | 0.100  | 0.125 |

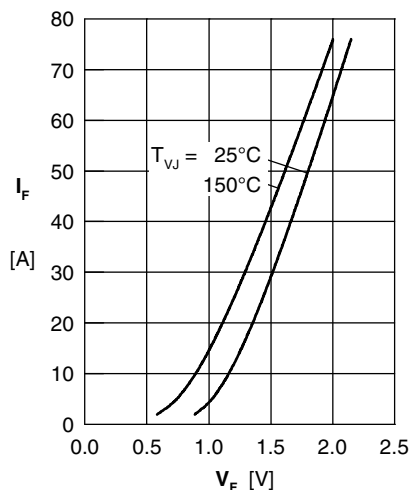


Fig. 1 Forward current  $I_F$  vs.  $V_F$

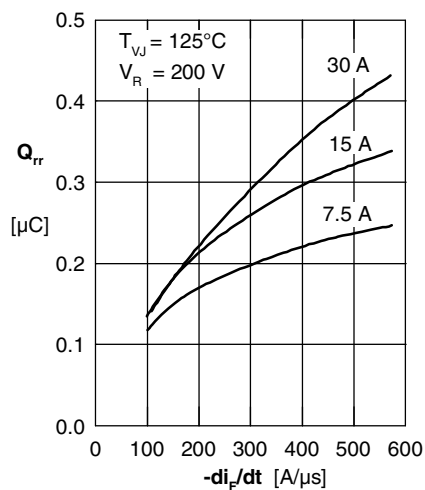


Fig. 2 Typ. reverse recovery charge  $Q_{rr}$  versus  $-di_F/dt$

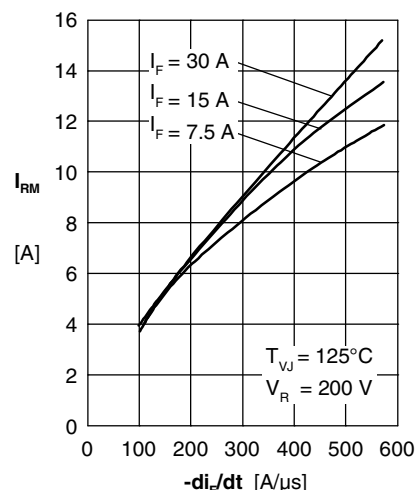


Fig. 3 Typ. peak reverse current  $I_{RM}$  versus  $-di_F/dt$

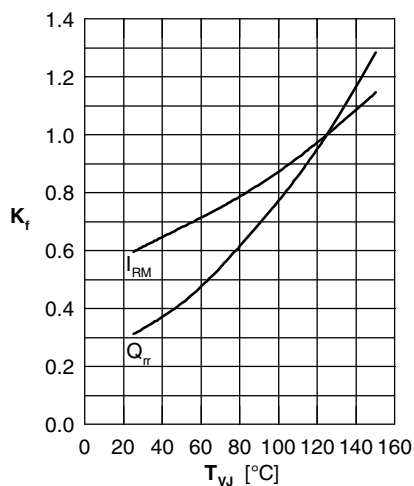


Fig. 4 Dynamic parameters  $Q_{rr}$ ,  $I_{RM}$  versus  $T_{VJ}$

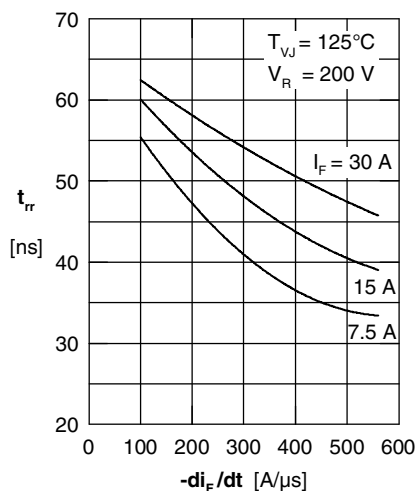


Fig. 5 Typ. recovery time  $t_{rr}$  vs.  $-di_F/dt$

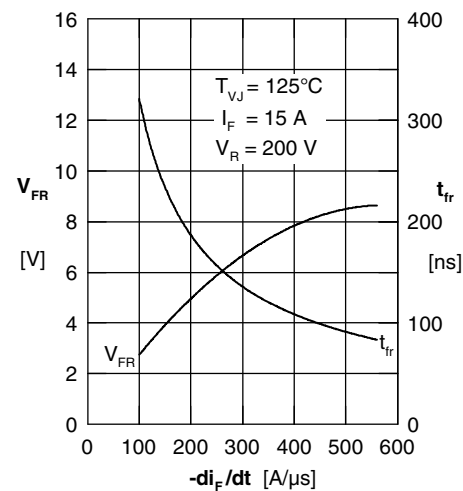


Fig. 6 Typ. peak forward voltage  $V_{FR}$  and  $t_{rr}$  versus  $di_F/dt$

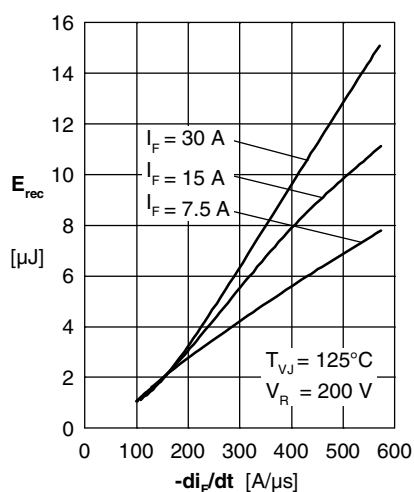


Fig. 7 Typ. recovery energy  $E_{rec}$  versus  $-di_F/dt$

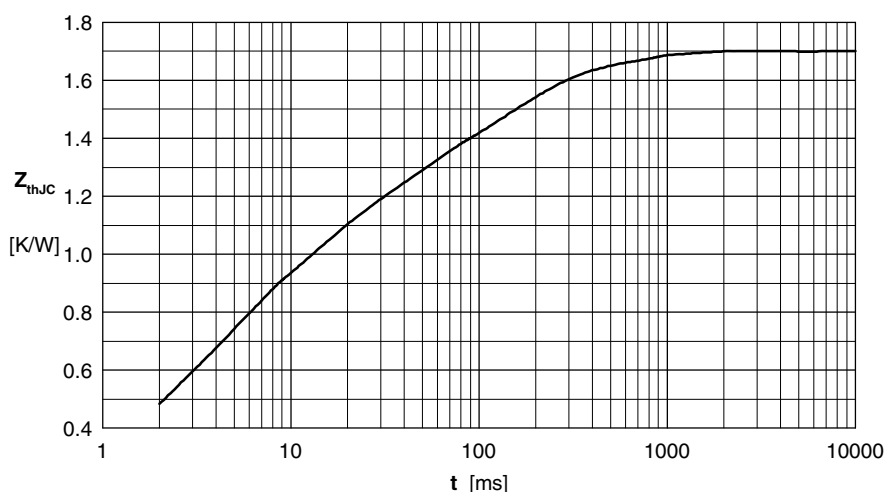


Fig. 8 Transient thermal resistance junction to case