

TEL: (858) 621-2700
URL: www.zcomm.com
EMAIL: applications@zcomm.com


Voltage-Controlled Oscillator Surface Mount Module

Applications

Test Equipment
Radar Systems
Satcom

Application Notes

AN-101: Mounting and Grounding
AN-102: Output Loading
AN-107: Manual Soldering

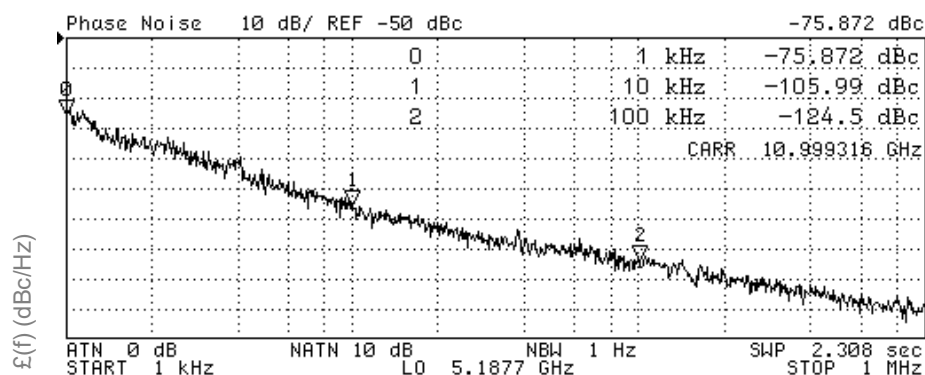

OFFSET (Hz)


Performance Specifications	Min	Typ	Max	Units
Oscillation Frequency Range	11000		11000	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-103		dBc/Hz
Harmonic Suppression (2nd)		-30	-25	dBc
Tuning Voltage	0		12	Vdc
Tuning Sensitivity (avg.)		0.8		MHz/V
Power Output	-3	0	3	dBm
Load Impedance		50		Ω
Input Capacitance			50	pF
Pushing			1	MHz/V
Pulling (dB Return Loss, Any Phase)			2	MHz
Operating Temperature Range	-40		85	$^{\circ}\text{C}$
Package Style		SDRO		

Power Supply Requirements	Min	Typ	Max	Units
Supply Voltage (Vcc, nom.)		5		Vdc
Supply Current (Icc)		25	30	mA


Additional Notes

It is not recommended to solder the ground plane under the DRO. Only the outside castellations shall be soldered.


Tuning Curve, typ.

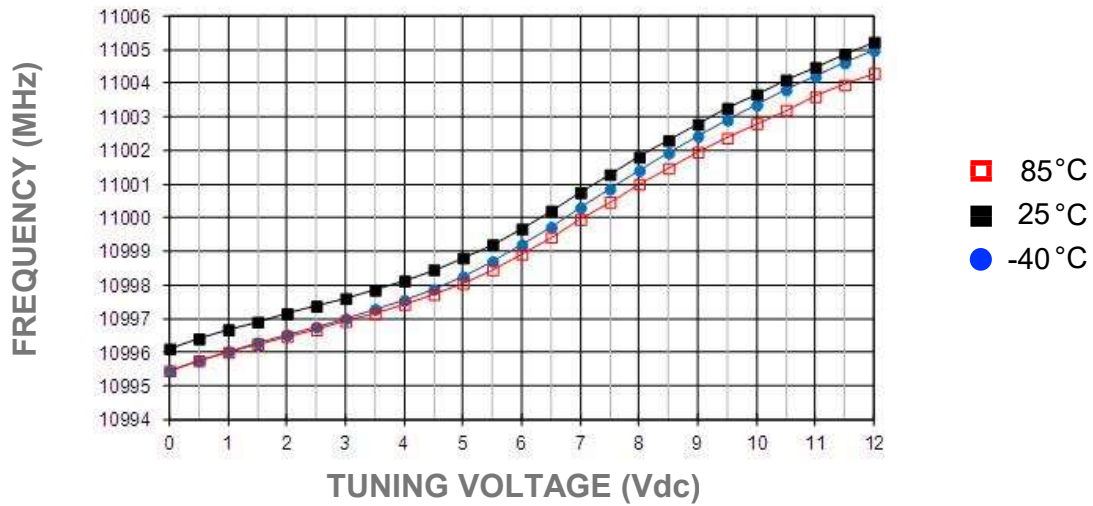


Power Curve, typ.

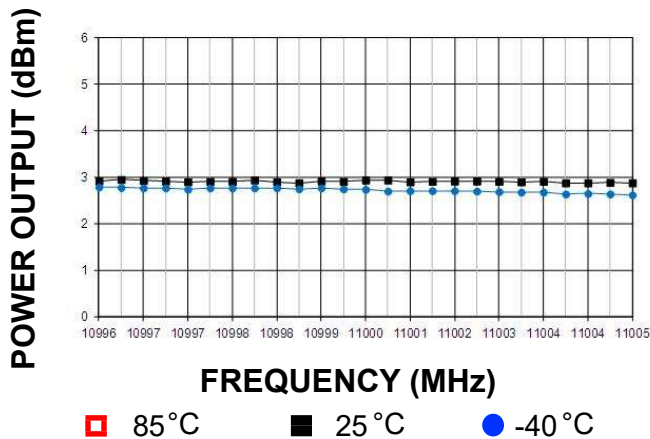

Footprint

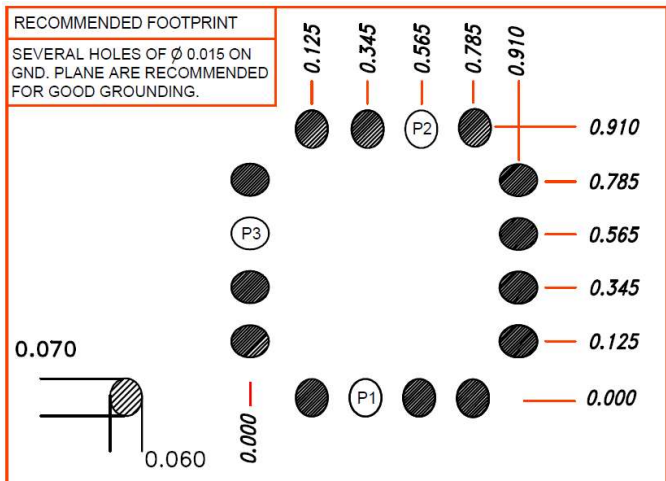

Physical Dimensions

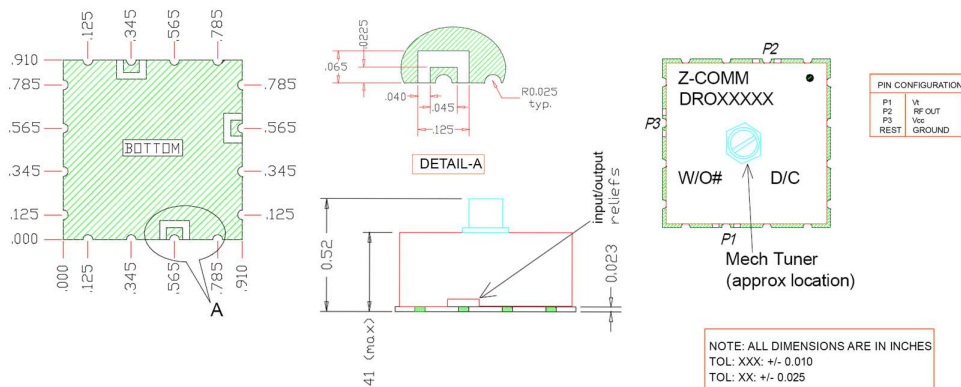

Note: It is not recommended to solder the ground plane under the DRO. Only the outside castellations require soldering for assembly.

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.