

## Features

- Low profile package
- Ideal for automated placement
- Low power losses, high efficiency
- Low forward voltage drop
- High surge capability
- High temperature soldering:  
260°C/10 seconds at terminals
- Component in accordance to  
RoHS 2002/95/1 and WEEE 2002/96/EC
- AEC-Q101 qualified



SOD-123FL

## Mechanical Date

- **Case:** SOD-123FL molded plastic
- **Terminals:** Solder plated, solderable per  
JESD22-B102D
- **Polarity:** Laser band denotes cathode end

## Major Ratings and Characteristics

$I_{F(AV)}$	1.0A
$V_{RRM}$	20 V to 200 V
$I_{FSM}$	25A
$V_F$	0.50V, 0.55V, 0.70V, 0.85V, 0.95V
$T_j \text{ max.}$	125 °C

## Maximum Ratings & Thermal Characteristics

( $T_A = 25\text{ °C}$  unless otherwise noted)

Items	Symbol	DSK 12	DSK 13	DSK 14	DSK 15	DSK 16	DSK 18	DSK 110	DSK 115	DSK 120	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	200	V
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	140	V
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	150	200	V
Maximum average forward rectified current	$I_{F(AV)}$	1									A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	25									A
Thermal resistance from junction to lead <sup>(1)</sup>	$R_{\theta JL}$	20									°C/W
Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +125									°C

Note 1: Mounted on P.C.B. with 0.036 x 0.06" (0.9 x 1.5mm) copper pad areas.

## Electrical Characteristics


( $T_A = 25\text{ °C}$  unless otherwise noted)

Items	Test conditions	Symbol	DSK 12	DSK 13~14	DSK 15~16	DSK 18~110	DSK 115~120	UNIT	
Instantaneous forward voltage	$I_F=1.0A^{(2)}$	$V_F$	0.50	0.55	0.70	0.85	0.95	V	
Reverse current	$V_R=V_{DC}$	$I_R$	$T_J=25\text{ °C}$				0.5		mA
			$T_J=100\text{ °C}$				5.0		


Note 2: Pulse test:300µs pulse width,1% duty cycle.

## Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

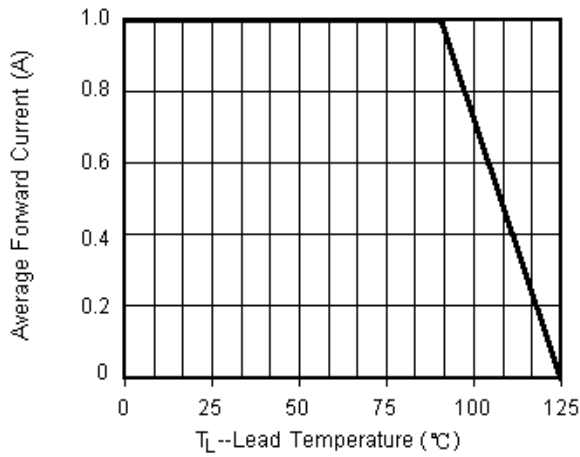


**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current**

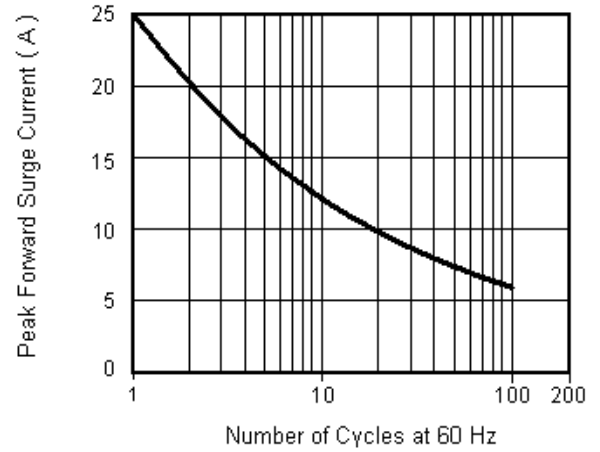


**Fig.3 Typical Instantaneous Forward Characteristics**

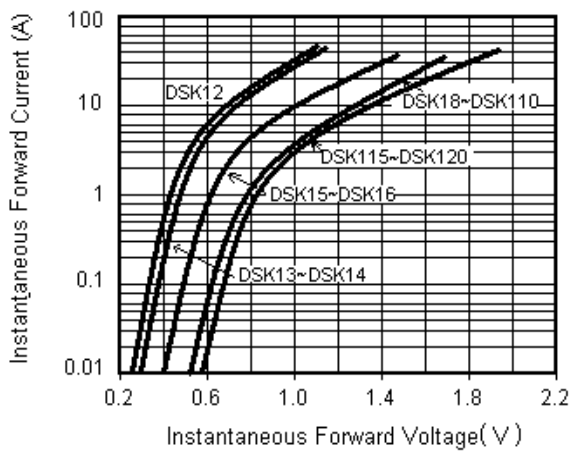

**Fig.4 Typical Reverse Leakage Characteristics**

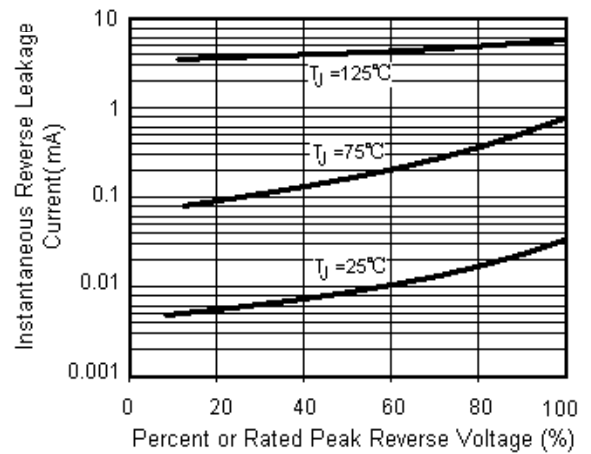

## Package Outline

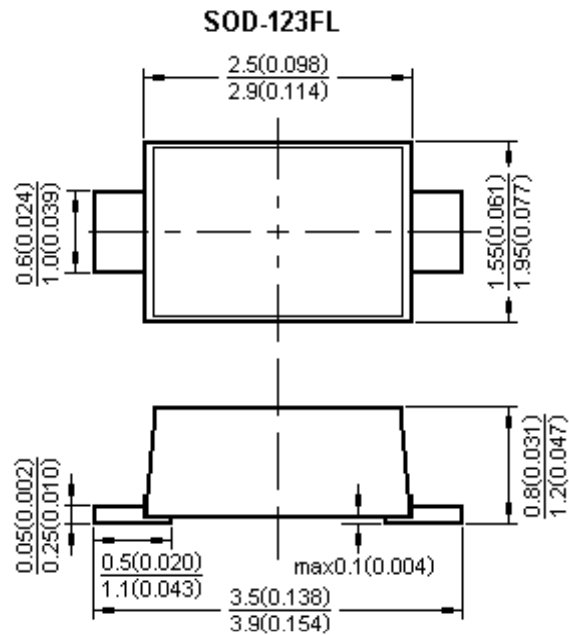

Dimensions in millimeters and (inches)