



### DST560S

HF RoHS Pb e3

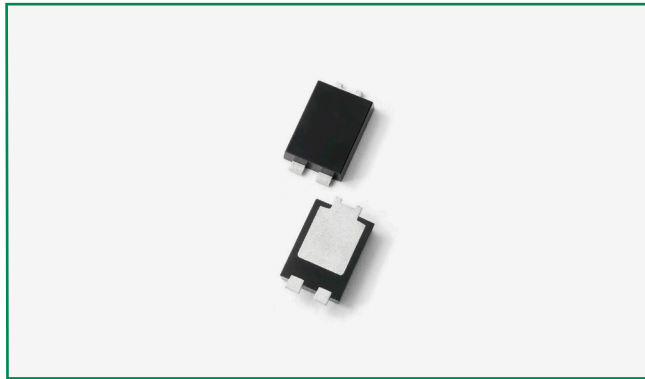

#### Pin out



#### Description

Littelfuse DST series Ultra Low  $V_F$  Schottky Barrier Rectifier is designed to meet the general requirements of commercial and industry applications by providing high temperature, low leakage and lower  $V_F$  products.

It is suitable for high frequency switching mode power supply, free-wheeling diodes and polarity protection diodes.

#### Features

- Ultra low forward voltage drop
- High frequency operation
- MSL: Level 1 - unlimited
- High junction temperature capability
- Trench MOS Schottky technology
- Single die in TO-277B Package
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/ JEDEC J-STD-609A.01)

#### Applications

- Switching mode power supply
- DC/DC converters
- Free-Wheeling diodes
- Polarity Protection Diodes

#### Maximum Ratings

| Parameters                                  | Symbol      | Test Conditions                                                     | Max | Unit |
|---------------------------------------------|-------------|---------------------------------------------------------------------|-----|------|
| Peak Inverse Voltage                        | $V_{RWM}$   | -                                                                   | 60  | V    |
| Average Forward Current                     | $I_{F(AV)}$ | 50% duty cycle @ $T_L = 125^\circ\text{C}$<br>rectangular wave form | 5   | A    |
| Peak One Cycle Non-Repetitive Surge Current | $I_{FSM}$   | 8.3 ms, half Sine pulse                                             | 100 | A    |

#### Electrical Characteristics

| Parameters            | Symbol   | Test Conditions                                                          | Typ  | Max  | Unit |
|-----------------------|----------|--------------------------------------------------------------------------|------|------|------|
| Forward Voltage Drop* | $V_{F1}$ | @2.5A, Pulse, $T_J = 25^\circ\text{C}$                                   | 0.42 | -    | V    |
|                       |          | @5A, Pulse, $T_J = 25^\circ\text{C}$                                     | 0.50 | 0.70 |      |
|                       | $V_{F2}$ | @2.5A, Pulse, $T_J = 125^\circ\text{C}$                                  | 0.33 | -    |      |
|                       |          | @5A, Pulse, $T_J = 125^\circ\text{C}$                                    | 0.44 | 0.60 |      |
| Reverse Current*      | $I_{R1}$ | @ $V_R = \text{rated } V_R$ , $T_J = 25^\circ\text{C}$                   | 0.01 | 0.7  | mA   |
|                       | $I_{R2}$ | @ $V_R = \text{rated } V_R$ , $T_J = 125^\circ\text{C}$                  | 6.4  | 25   |      |
| Junction Capacitance  | $C_T$    | @ $V_R = 5\text{V}$ , $T_C = 25^\circ\text{C}$ , $f_{SIG} = 1\text{MHz}$ | 314  | -    | pF   |

\* Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

### Thermal-Mechanical Specifications

| Parameters                                        | Symbol     | Test Conditions | Max         | Unit |
|---------------------------------------------------|------------|-----------------|-------------|------|
| Junction Temperature                              | $T_J$      |                 | -55 to +150 | °C   |
| Storage Temperature                               | $T_{stg}$  |                 | -55 to +150 | °C   |
| Maximum Thermal Resistance<br>Junction to Ambient | $R_{thJA}$ | DC operation    | 75          | °C/W |
| Maximum Thermal Resistance<br>Junction to Lead    | $R_{thJL}$ |                 | 4           | °C/W |
| Approximate Weight                                | wt         |                 | 0.08        | g    |
| Case Style                                        | TO-277B    |                 |             |      |

Figure 1: Typical Forward Characteristics

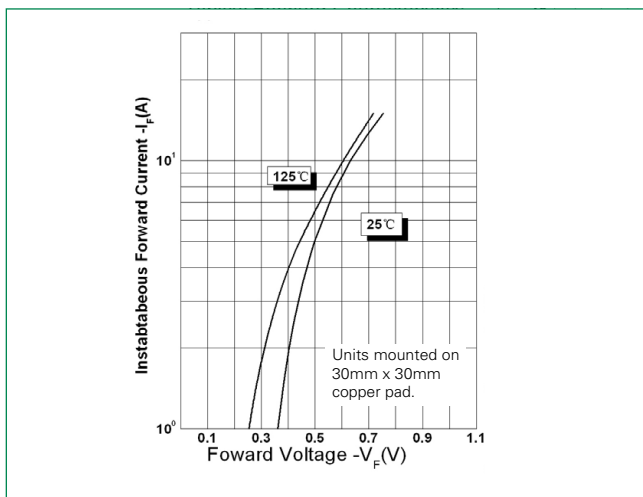


Figure 2: Typical Reverse Characteristics


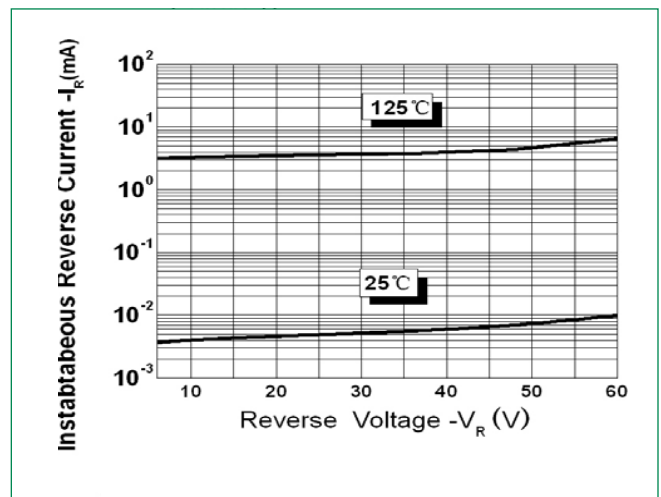



Figure 3: Typical Junction Capacitance

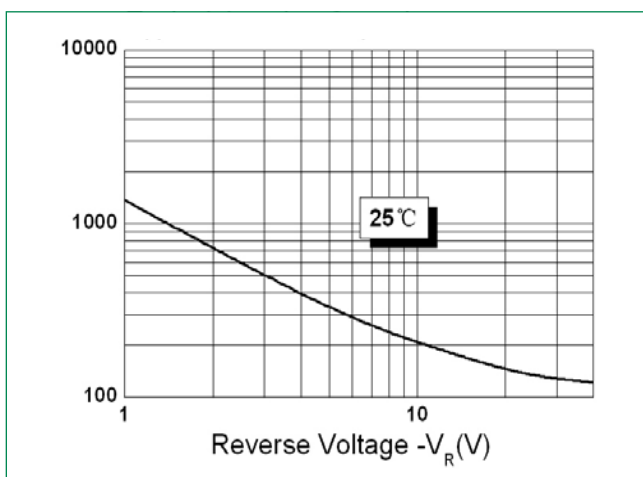

# Schottky Barrier Rectifier


## DST560S, 5A, 60V, TO-277B, Single

### Dimensions-TO-277B

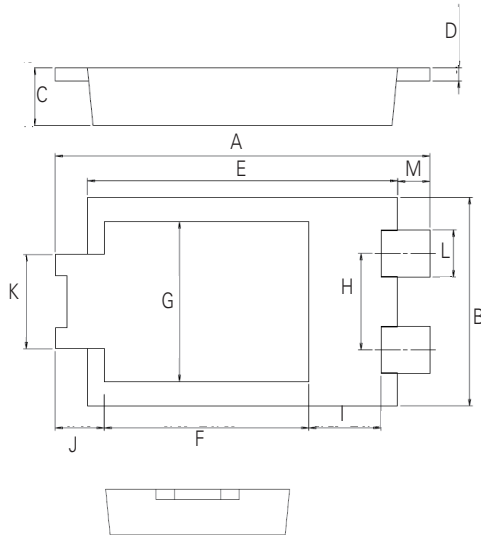

| Symbol   | Millimeters |      |      |
|----------|-------------|------|------|
|          | Min         | Typ  | Max  |
| <b>A</b> | 6.30        | 6.50 | 6.70 |
| <b>B</b> | 3.88        | 3.98 | 4.08 |
| <b>C</b> | 0.95        | 1.10 | 1.25 |
| <b>D</b> | 0.20        | 0.25 | 0.30 |
| <b>E</b> | 5.28        | 5.38 | 5.48 |
| <b>F</b> | 3.40        | 3.55 | 3.70 |
| <b>G</b> | 2.90        | 3.05 | 3.20 |
| <b>H</b> | 1.74        | 1.84 | 1.94 |
| <b>I</b> | 1.10        | 1.25 | 1.40 |
| <b>J</b> | -           | 0.85 | -    |
| <b>K</b> | 1.70        | 1.80 | 1.90 |
| <b>L</b> | 0.85        | 0.90 | 0.95 |
| <b>M</b> | -           | 0.56 | -    |

### Mounting Pad Layout

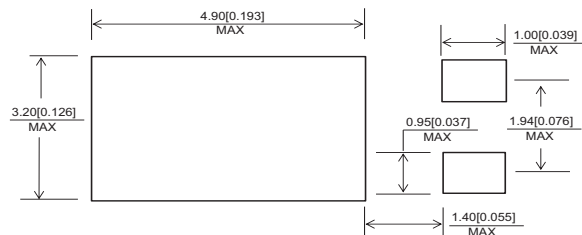

### Part Numbering and Marking System




**DST** = Device Type  
**5** = Forward Current (5A)  
**60** = Reverse Voltage (60V)  
**S** = Package Type  
**LF** = Littelfuse  
**YY** = Year  
**WW** = Week  
**L** = Lot Number

### Packing Options

| Part Number | Marking | Packing Mode   | M.O.Q |
|-------------|---------|----------------|-------|
| DST560S     | DST560S | 5000pcs / Reel | 5000  |

### Carrier Tape & Reel Specification

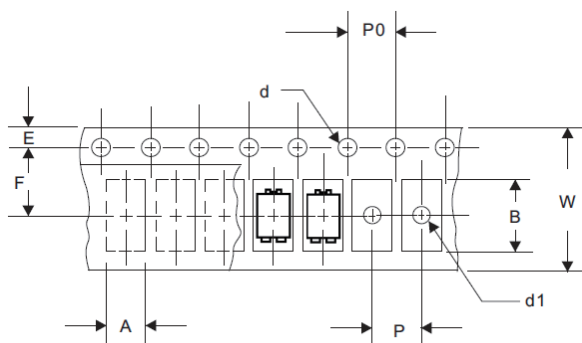

| Symbol    | Millimeters |       |
|-----------|-------------|-------|
|           | Min         | Max   |
| <b>A</b>  | 4.28        | 4.48  |
| <b>B</b>  | 6.80        | 7.00  |
| <b>d</b>  | 1.40        | 1.60  |
| <b>d1</b> | -           | 1.50  |
| <b>E</b>  | 1.65        | 1.85  |
| <b>F</b>  | 5.40        | 5.60  |
| <b>P</b>  | 7.90        | 8.10  |
| <b>P0</b> | 3.90        | 4.10  |
| <b>W</b>  | 11.70       | 12.30 |