



MODEL NUMBER DSW52179



Switch SP5T

FEATURES

- DC - 1000 MHz
- 36 nSec Switching Speed
- High Isolation, 70 dB Typical
- Low DC Bias, < 1 mA Typical


SP5T

www.DataSheet4U.com

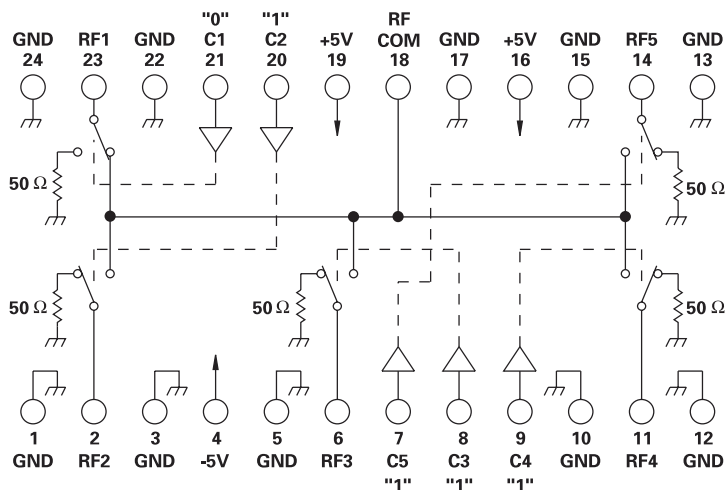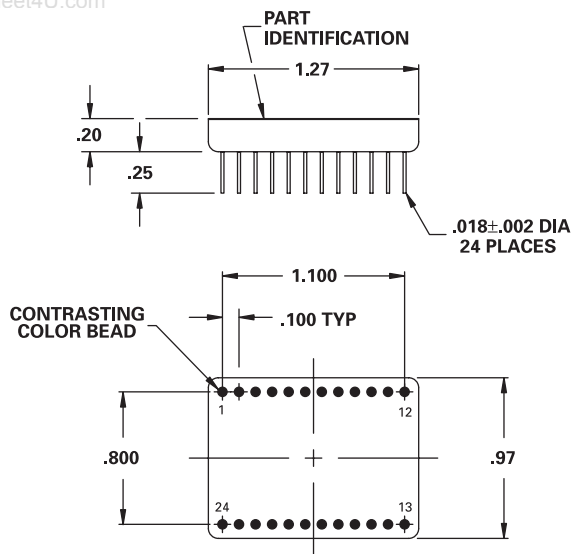

GUARANTEED PERFORMANCE

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	DC		1000	MHz	
DC Current		0.9 0.02	8 2	mA	At +5 VDC Supply At -5 VDC Supply
Control Type		TTL			Logic "0" = Thru
Control Current	High Low	0 0		μA	V _{IH} = +2.7V V _{IL} = +0.5V
Isolation	80 70 60	98 78 71		dB	DC - 50 MHz 50 - 500 MHz 500 - 1000 MHz
Insertion Loss		1.20	1.8	dB	
VSWR	Thru Termination	1.10/1 1.08/1	1.3/1 2.0/1		
Impedance		50		OHMS	
Switching Speed		36	70	nSEC	50% TTL to 90% / 10% RF
Transition (Rise/Fall) Time		5		nSEC	10% / 90% or 90% / 10% RF
Switching (Video) Transients		6		mV	Peak Value
Intercept Points	2nd 3rd	+74 +30		dBm	450 MHz / 150 MHz 225 MHz / 150 MHz
RF Power	Operate No Damage	+12 +17	+10 +13 +25	dBm	DC - 300 MHz 300 - 1000 MHz
Operating Temperature	-54	+25	+105	°C	TA

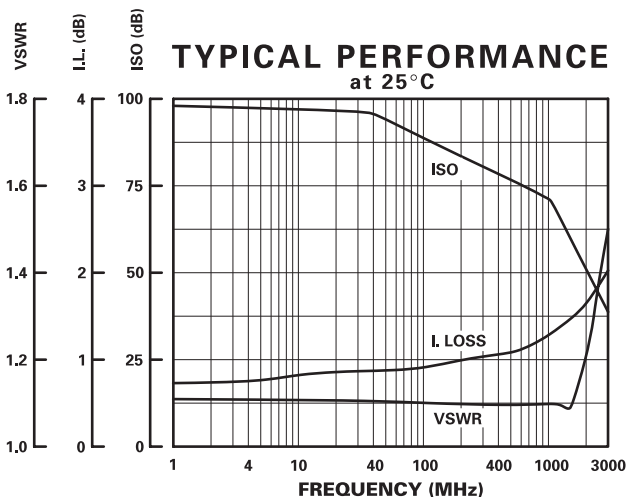

DAICO Industries

310.507.3242 • FAX 310.507.5701 • www.daico.com
www.DataSheet4U.com