

FEATURES

- Broad Band, 1 - 2000 MHz
- Modular Design
- Phase Tracking, ± 2 Degrees
- Hermetic Aluminum Case





MODEL NO.
DSWM6309



Switch Network

PORT SELECT					
Switch State			Port		
S1 (J66 to J73)	S2	S3	2 ²	2 ¹	2 ⁰
J58 to J65	J10 to J17	J18 to J25	0	0	0
S3	J10 to J17	S1	0	0	1
J58 to J65	J2 to J9	J18 to J25	0	1	0
S3	J2 to J9	S1	0	1	1
J50 to J57	Not Sel.	Not Sel.	1	0	0
J26 to J33	Not Sel.	Not Sel.	1	0	1
J34 to J41	Not Sel.	Not Sel.	1	1	0
J42 to J49	Not Sel.	Not Sel.	1	1	1


www.DataSheet4U.com

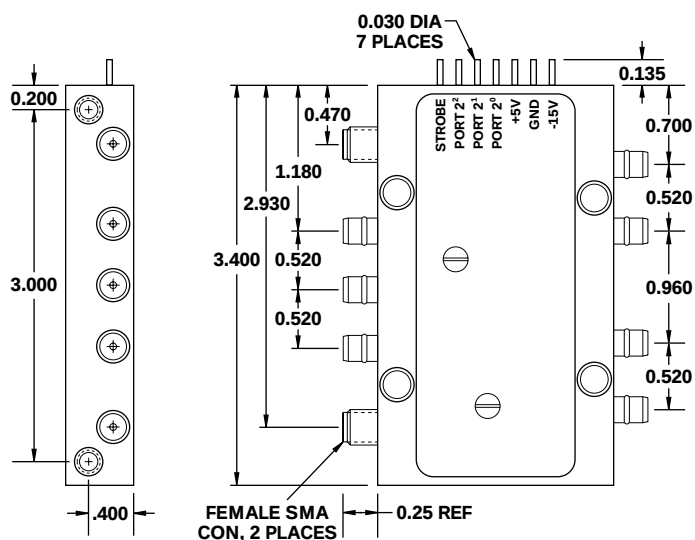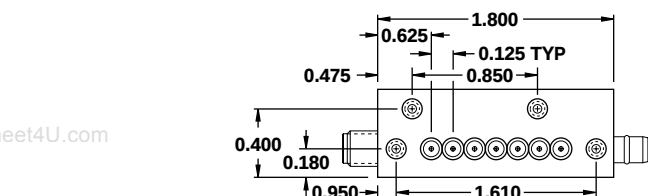

6 - 32 X .475 DEEP, MAX
INSERTS 3 PLACES

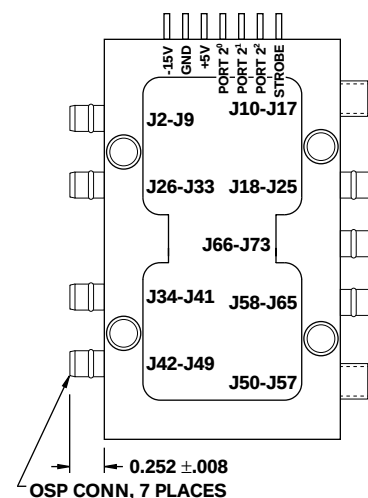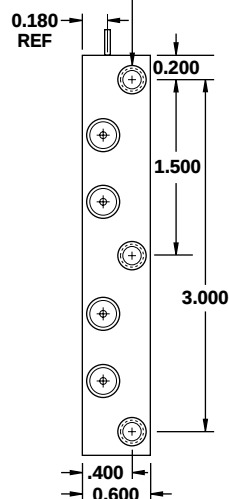

GUARANTEED PERFORMANCE

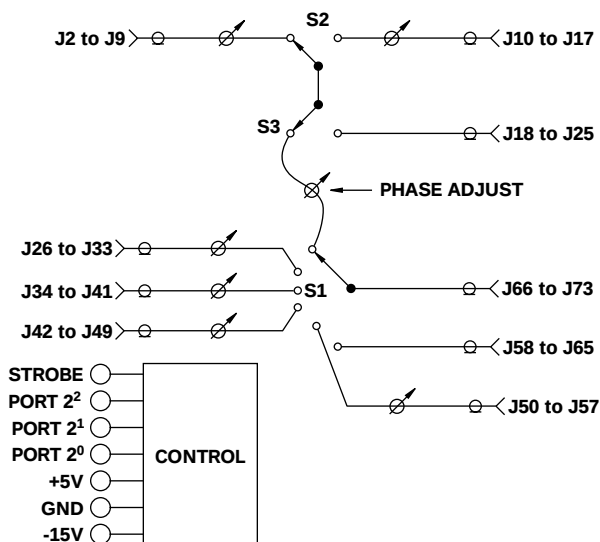

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	1 250		1200 2000	MHz	J2 to J25, S1 J26 to J73, S2 and S3
DC Current			50 37	mA	At +5 VDC Supply At -15 VDC Supply
Control Type		TTL			See Logic Table
Control Current	High Low		± 10 ± 10	μ A	V _{IH} = +2.7 V V _{IL} = +0.5 V
Isolation	50	55		dB	Any Port to Port
Insertion Loss		1.0 1.5 1.5 2.0	1.5 2.0 2.0 2.5	dB	1 - 20 MHz, S1 20 - 1200 MHz, S1 1200 - 2000 MHz, S2 and S3 250 - 1200 MHz, S2 and S3
VSWR			1.5/1		
Intercept Points	2nd 3rd	75 45	80 49	dBm	
Amplitude Balance		± 0.1	± 0.3	dB	
Phase Balance			± 1 ± 2	DEG	1 - 20 MHz, S1 20 - 2000 MHz, S1, S2 and S3
P1dB Compression	+15 +20	+21 +30	+30	dBm	1 - 20 MHz 20 - 2000 MHz
Operating Temperature	0	+25	+70	$^{\circ}$ C	TA