



Features

- Epitaxial planar die construction
- Built-in biasing resistors (R_1 : 4.7k Ω , R_2 : 4.7k Ω)
- Also available in lead free version
- RoHS compliant with Halogen-free

HF

Mechanical Data

- Case: SOT-23-3L
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

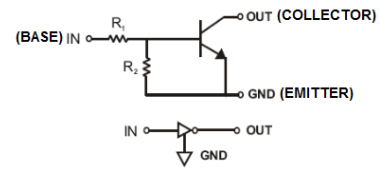

SOT-23-3L

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
DTC143EKA	SOT-23-3L	3000 pcs / Tape & Reel	23

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC}	-50	V
Input Voltage	V_I	-10 to +30	V
Output Current	I_O	100	mA
Collector Current	$I_{C(\text{Max})}$	100	mA
Power Dissipation	P_D	200	mW
Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	$V_{I(\text{OFF})}$	$V_{CC} = 5\text{V}$, $I_O = 100\mu\text{A}$	0.5	-	-	V
Input Voltage	$V_{I(\text{ON})}$	$V_O = 0.3\text{V}$, $I_O = 20\text{mA}$	-	-	3	V
Output Voltage	$V_{O(\text{on})}$	$I_O = 10\text{mA}$, $I_I = 0.5\text{mA}$	-	-	0.3	V
Input Current	I_I	$V_I = 5\text{V}$	-	-	1.8	mA
Output Current	$I_{O(\text{off})}$	$V_{CC} = 50\text{V}$, $V_I = 0\text{V}$	-	-	0.5	μA
DC Current Gain	G_I	$V_O = 5\text{V}$, $I_O = 10\text{mA}$	20	-	-	-
Input Resistor	R_1		3.29	4.7	6.11	k Ω
Resistance ratio	R_2/R_1		0.8	1.0	1.2	-
Gain-Bandwidth Product	f_T	$V_{CE} = 10\text{V}$, $I_E = 5\text{mA}$ $f = 100\text{MHz}$	-	250	-	MHz

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

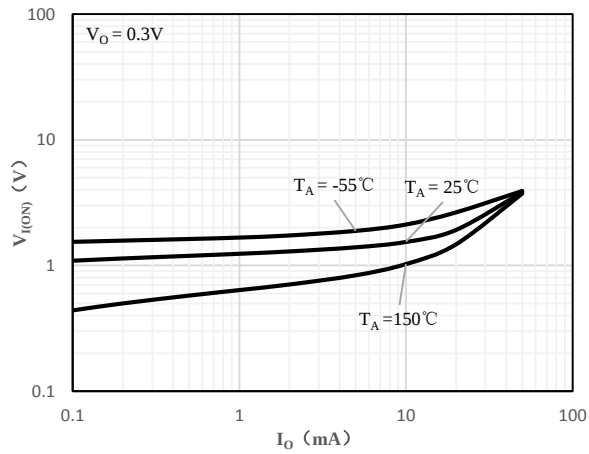


Fig 1 Input Voltage vs Output Current

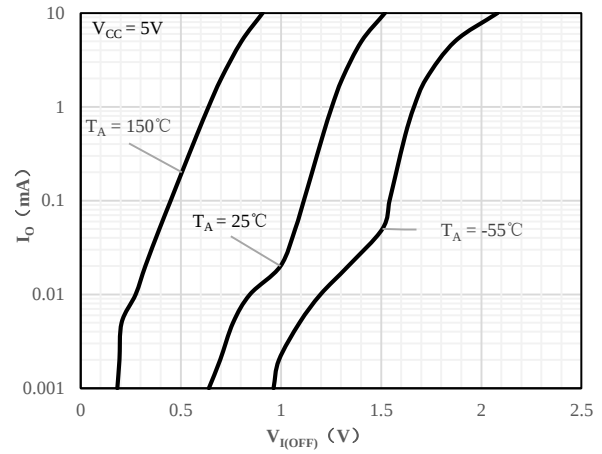


Fig 2 Output Current vs Input Voltage

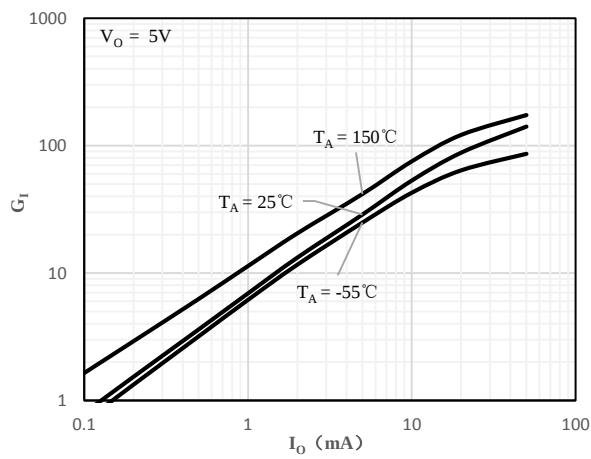


Fig 3 DC Current Gain vs Output Current


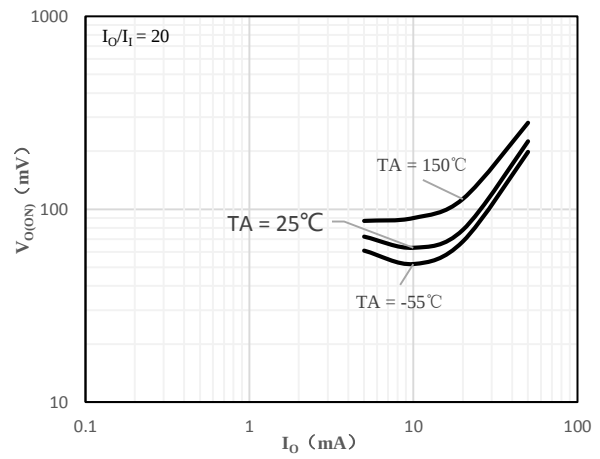


Fig 4 Output Voltage vs Output Current

Package Outline Dimensions (Unit: mm)

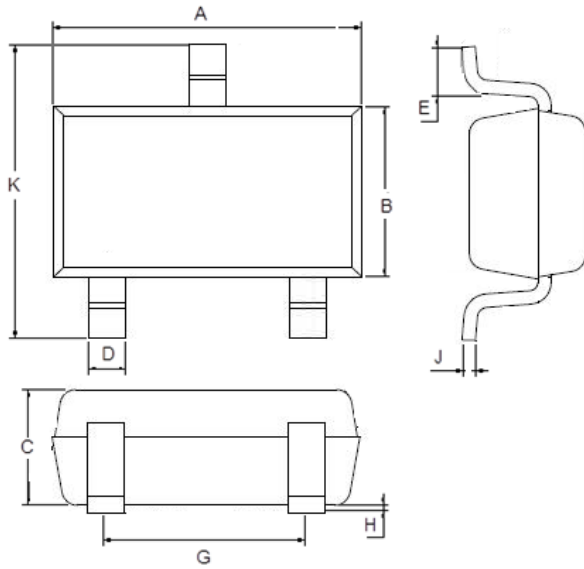

SOT-23-3L		
Dimension	Min.	Max.
A	2.80	3.00
B	1.50	1.70
C	1.00	1.20
D	0.35	0.45
E	0.35	0.55
G	1.80	2.00
H	0.02	0.10
J	0.10	0.20
K	2.60	3.00

Mounting Pad Layout (Unit: mm)

SOT-23-3L

