


Small Signal Diode

Features


- ✧ Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistor (see equivalent circuit).
- ✧ The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- ✧ Only the on/off conditions need to be set for operation, marking device design easy.
- ✧ Green compound (Halogen free) with suffix "G" on packing code and prefix "G" on date code.



Ordering Information

Package	Part No.	Packing	Marking
SOT-723	DTC143 TM	8K / 7" Reel	03
SOT-523	DTC143 TE	3K / 7" Reel	03
SOT-323	DTC143 TUA	3K / 7" Reel	03
SOT-23	DTC143 TCA	3K / 7" Reel	03
TO-92S	DTC143 TSA	3K / 7" Reel	

• Equivalent Circuit



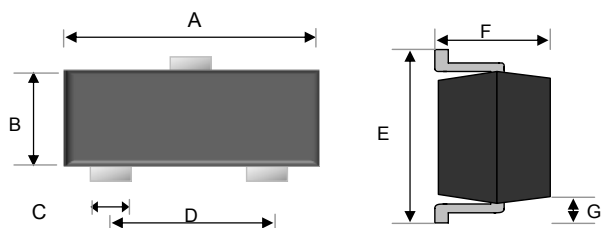
Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

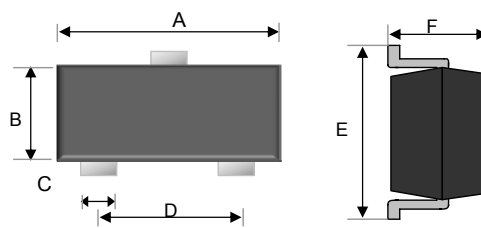
Type Number	Symbol	Value				Units
		TM	TE	TUA TCA	TSA	
Power Dissipation	PD	100	150	200	300	mW
Collector-Emitter Voltage	$V_{(BR)CBO}$	50				V
Emitter-Base Voltage	$V_{(BR)CEO}$	50				V
Emitter-base voltage	$V_{(BR)EBO}$	5				V
Collector Current	I_C	100				mA
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to + 150				°C

Notes:1. Valid provided that electrodes are kept at ambient temperature

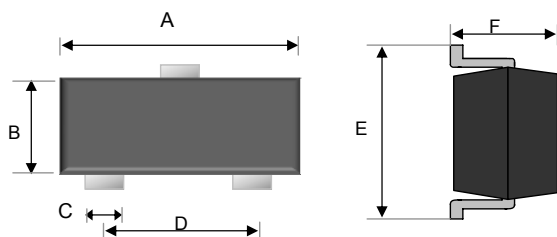
Parameter	Symbol	Min	Typ	Max	Condition	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	50			$I_C=50\mu A$	V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	50			$I_C=1mA$	V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	5			$I_E=50\mu A$	V
Collector cut-off current	I_{CBO}			0.5	$V_{CB}=50V$	μA
Emitter cut-off current	I_{EBO}			0.5	$V_{EB}=4V$	μA
DC Current Gain	$V_{CE(sat)}$			0.3	$I_C=5mA, I_B=0.25mA$	V
Input Resistance	h_{FE}	100		600	$V_{CE}=5V, I_C=1mA$	
Resistance Ratio	R_1	3.29	4.7	6.11		K Ω
Transition Frequency	f_T		250		$V_{CE}=10V, I_E=5mA, f=100MHz$	MHz

SOT-23


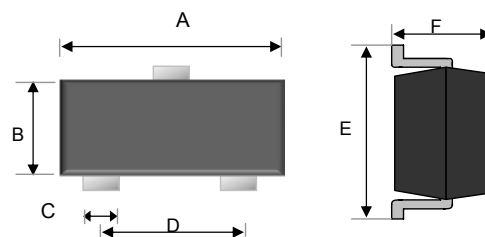
Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	2.80	3.00	0.11	0.12
B	1.20	1.40	0.05	0.06
C	0.30	0.50	0.01	0.02
D	1.80	2.00	0.07	0.08
E	2.25	2.55	0.09	0.10
F	0.90	1.20	0.04	0.04
G	0.550 REF		0.022 REF	

SOT-323


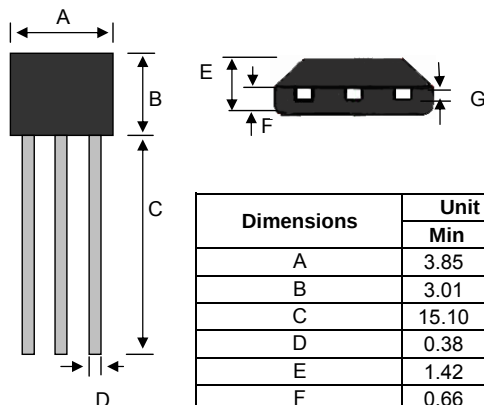
Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.90	2.10	0.07	0.08
B	1.15	1.35	0.05	0.05
C	0.25	0.35	0.01	0.01
D	1.20	1.40	0.05	0.06
E	2.00	2.20	0.08	0.09
F	0.80	1.00	0.03	0.04

SOT-523


Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.50	1.70	0.06	0.07
B	0.70	0.80	0.03	0.03
C	0.25	0.35	0.01	0.01
D	0.90	1.10	0.04	0.04
E	1.50	1.70	0.06	0.07
F	0.70	0.90	0.03	0.04

SOT-723


Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.15	1.25	0.05	0.05
B	0.75	0.85	0.03	0.03
C	0.17	0.27	0.01	0.01
D	0.8 TYP		0.31TYP	
E	1.15	1.25	0.05	0.05
F		0.50		0.02

TO-92S


Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	3.85	4.15	0.15	0.16
B	3.01	3.31	0.12	0.13
C	15.10	15.50	0.59	0.61
D	0.38	0.55	0.01	0.02
E	1.42	1.62	0.06	0.06
F	0.66	0.86	0.03	0.03
G	0.36	0.51	0.01	0.02