



# DTC1969 @ 34.368 MHz

DIL14 / 4 pins  
TCXO

DTC1969  
17-05-2000




**Frequency:** 34.368 MHz


**Features:**

Operating Temperature	-40°C~+85°C
Frequency Stability	±7 ppm
Ageing @ 45°C	±1 ppm max./year
Overall Stability (1)	±15 ppm
Supply voltage	+5 V ±5%
Current consumption	35 mA max.
Rise & fall time	10 ns max.
Load HCMOS compatible	15 pF max
Duty cycle	45/55

**Package Size (mm)**

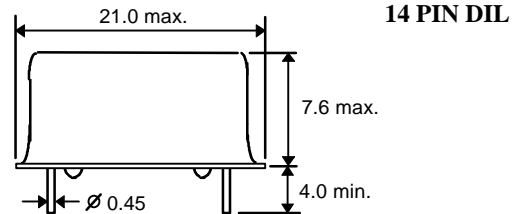

**14 PIN DIL**

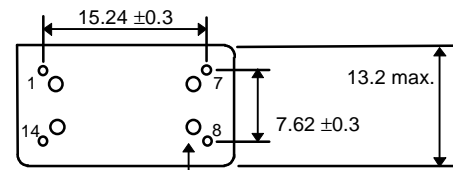

Insulated standoffs (Glass)

(1) Including 25°C calibration, temperature, ageing 10 years, Vcc, load. changes

SHORT FORM Data Sheet - For more details, please contact us

**SALES OFFICES:**

**Benelux:** +33 (0) 1 49 88 49 00 / **Germany:** +49 (0) 89 820 79620 / **Nordic:** +46 (0) 8 59030300  
**France:** +33 (0) 1 49 88 49 00 / **Italy:** +39 (0) 738 8869 / **Spain:** +33 (0) 1 49 88 49 00 / **UK:** +44 (0) 1256 883340  
**USA:** +1 (623) 780-1995 / **Asia-Pacific:** +33 (0) 5 56 46 66 84

**WEB SITE:** <http://www.temex-components.com>

**E-mail:** [adsl@temex.fr](mailto:adsl@temex.fr)

*Specifications are subject to change without notice*