



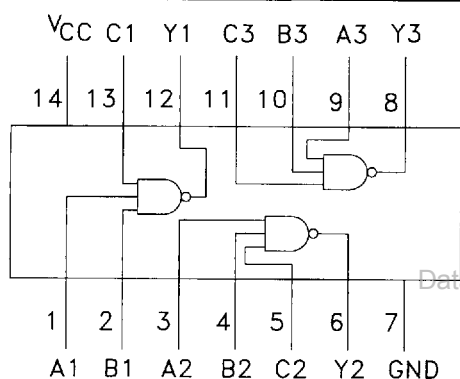
**Technical Data**

Available Q2, 1995

**Triple 3-Input NAND Gate**

This device contains three independent gates, each of which performs the logic NAND function.

- Advanced very high speed CMOS
- Outputs source/sink 24 mA
- Transmission line driving 50 ohms
- ACT has TTL compatible inputs
- AC device operation guaranteed from 2 to 6 volts
- DC & AC Parameters guaranteed over  $-40$  to  $+85^{\circ}\text{C}$

**DV74AC10**  
**DV74ACT10**

 N Suffix  
 Plastic DIP  
 AVG-001 Case

 D Suffix  
 Plastic SOP  
 AVG-002 Case
**TRUTH TABLE**

| Inputs |   |   | Outputs |
|--------|---|---|---------|
| A      | B | C | Y       |
| L      | X | X | H       |
| X      | L | X | H       |
| X      | X | L | H       |
| H      | H | H | L       |

H=High Logic Level  
 L=Low Logic Level  
 X=Don't Care

**ABSOLUTE MAXIMUM RATINGS**

Maximum ratings are those values beyond which damage to the device may occur.

| Symbol    | Parameter                                 | AC10, ACT10              | Unit               |
|-----------|-------------------------------------------|--------------------------|--------------------|
| $V_{CC}$  | DC Supply Voltage (Referenced to GND)     | $-0.5$ to $+7.0$         | V                  |
| $V_{IN}$  | DC Input Voltage (Referenced to GND)      | $-0.5$ to $V_{CC} + 0.5$ | V                  |
| $V_{OUT}$ | DC Output Voltage (Referenced to GND)     | $-0.5$ to $V_{CC} + 0.5$ | V                  |
| $I_{IN}$  | DC Input Current, per Pin                 | $\pm 20$                 | mA                 |
| $I_{OUT}$ | DC Output Sink/Source Current, per Pin    | $\pm 50$                 | mA                 |
| $I_{CC}$  | DC $V_{CC}$ or GND Current per Output Pin | $\pm 50$                 | mA                 |
| $T_{stg}$ | Storage Temperature                       | $-65$ to $+150$          | $^{\circ}\text{C}$ |

**GUARANTEED OPERATING CONDITIONS**

| Symbol            | Parameter                                        | Min                     | Typ | Max      | Unit |   |
|-------------------|--------------------------------------------------|-------------------------|-----|----------|------|---|
| $V_{CC}$          | Supply Voltage                                   | 'AC                     | 2.0 | 5.0      | 6.0  | V |
|                   |                                                  | 'ACT                    | 4.5 | 5.0      |      |   |
| $V_{IN}, V_{OUT}$ | DC Input Voltage, Output Voltage, (Ref. to GND)  | 0                       |     | $V_{CC}$ | V    |   |
| $t_r, t_f$        | Input Rise and Fall Time (Note 1)<br>'AC Devices | $V_{CC} @ 3.0\text{ V}$ |     | 150      | ns/V |   |
|                   |                                                  | $V_{CC} @ 4.5\text{ V}$ |     | 40       | ns/V |   |
|                   |                                                  | $V_{CC} @ 5.5\text{ V}$ |     | 25       | ns/V |   |

**GUARANTEED OPERATING CONDITION (continued)**

| Symbol     | Parameter                                                               | Min              | Typ | Max | Unit |
|------------|-------------------------------------------------------------------------|------------------|-----|-----|------|
| $t_r, t_f$ | Input Rise and Fall Time (Note 2)<br>*ACT Devices except Schmitt Inputs | $V_{CC} @ 4.5 V$ |     | 10  | ns/V |
|            |                                                                         | $V_{CC} @ 5.5 V$ |     | 8.0 | ns/V |
| $T_A$      | Operating Ambient Temperature Range                                     | -40              | 25  | 85  | °C   |
| $C_{IN}$   | Input Capacitance                                                       | $V_{CC} = 5.0 V$ | 4.5 |     | pF   |
| $C_{PD}$   | Power Dissipation Capacitance                                           | $V_{CC} = 5.0 V$ | 25  |     | pF   |

1.  $V_{IN}$  from 30% to 70%  $V_{CC}$ 2.  $V_{IN}$  from 0.8 to 2.0 V**AC — 10****DC ELECTRICAL CHARACTERISTICS**

| Symbol   | Parameter                            | Conditions                              | $V_{CC}$<br>(V) | AC10                |                   |                                 | Unit    |      |   |
|----------|--------------------------------------|-----------------------------------------|-----------------|---------------------|-------------------|---------------------------------|---------|------|---|
|          |                                      |                                         |                 | $T_A = +25^\circ C$ |                   | $T_A = -40$<br>to $+85^\circ C$ |         |      |   |
|          |                                      |                                         |                 | Typ                 | Guaranteed Limits |                                 |         |      |   |
| $V_{IH}$ | Minimum High Level<br>Input Voltage  | $V_{OUT} = 0.1V$<br>or $V_{CC} - 0.1 V$ | 3.0             | 1.5                 | 2.1               | 2.1                             | V       |      |   |
|          |                                      |                                         | 4.5             | 2.25                | 3.15              | 3.15                            |         |      |   |
|          |                                      |                                         | 5.5             | 2.75                | 3.85              | 3.85                            |         |      |   |
| $V_{IL}$ | Maximum Low Level<br>Input Voltage   | $V_{OUT} = 0.1V$<br>or $V_{CC} - 0.1 V$ | 3.0             | 1.5                 | 0.9               | 0.9                             | V       |      |   |
|          |                                      |                                         | 4.5             | 2.25                | 1.35              | 1.35                            |         |      |   |
|          |                                      |                                         | 5.5             | 2.75                | 1.65              | 1.65                            |         |      |   |
| $V_{OH}$ | Minimum High Level<br>Output Voltage | $I_{OUT} = -50 \mu A$                   | 3.0             | 2.99                | 2.9               | 2.9                             | V       |      |   |
|          |                                      |                                         | 4.5             | 4.49                | 4.4               | 4.4                             |         |      |   |
|          |                                      |                                         | 5.5             | 5.49                | 5.4               | 5.4                             |         |      |   |
|          |                                      | $V_{IN} = V_{IL}$ or $V_{IH}$           | $I_{OH}$        | -12mA               | 3.0               |                                 | 2.56    | 2.46 | V |
|          |                                      |                                         |                 | -24mA               | 4.5               |                                 | 3.86    | 3.76 |   |
|          |                                      | -24mA                                   | 5.5             |                     | 4.86              | 4.76                            |         |      |   |
| $V_{OL}$ | Maximum Low Level<br>Output Voltage  | $I_{OUT} = 50 \mu A$                    | 3.0             | 0.002               | 0.1               | 0.1                             | V       |      |   |
|          |                                      |                                         | 4.5             | 0.001               | 0.1               | 0.1                             |         |      |   |
|          |                                      |                                         | 5.5             | 0.001               | 0.1               | 0.1                             |         |      |   |
|          |                                      | $V_{IN} = V_{IL}$ or $V_{IH}$           | $I_{OL}$        | 12mA                | 3.0               |                                 | 0.36    | 0.44 | V |
|          |                                      |                                         |                 | 24mA                | 4.5               |                                 | 0.36    | 0.44 |   |
|          |                                      | 24mA                                    | 5.5             |                     | 0.36              | 0.44                            |         |      |   |
| $I_{IN}$ | Maximum Input Leakage Current        | $V_{IN} = V_{CC}$ or GND                | 5.5             |                     | $\pm 0.1$         | $\pm 1.0$                       | $\mu A$ |      |   |
| $I_{CC}$ | Maximum Quiescent<br>Supply Current  | $V_{IN} = V_{CC}$ or GND                | 5.5             |                     | 4.0               | 40                              | $\mu A$ |      |   |

**AC CHARACTERISTICS over full operating conditions**

| Symbol    | Parameter         | $V_{CC}$<br>$\pm 10\%$<br>(V) | AC10                                 |     |                                                       |      | Unit |
|-----------|-------------------|-------------------------------|--------------------------------------|-----|-------------------------------------------------------|------|------|
|           |                   |                               | $T_A = +25^\circ C$<br>$C_L = 50 pF$ |     | $T_A = -40^\circ C$ to $+85^\circ C$<br>$C_L = 50 pF$ |      |      |
|           |                   |                               | Min                                  | Max | Min                                                   | Max  |      |
| $t_{PLH}$ | Propagation Delay | 3.3                           | 1.5                                  | 9.5 | 1.0                                                   | 10.5 | ns   |
|           |                   | 5.0                           | 1.5                                  | 7.0 | 1.0                                                   | 8.0  |      |
| $t_{PHL}$ | Propagation Delay | 3.3                           | 1.5                                  | 8.5 | 1.0                                                   | 10.0 | ns   |
|           |                   | 5.0                           | 1.5                                  | 6.0 | 1.0                                                   | 6.5  |      |

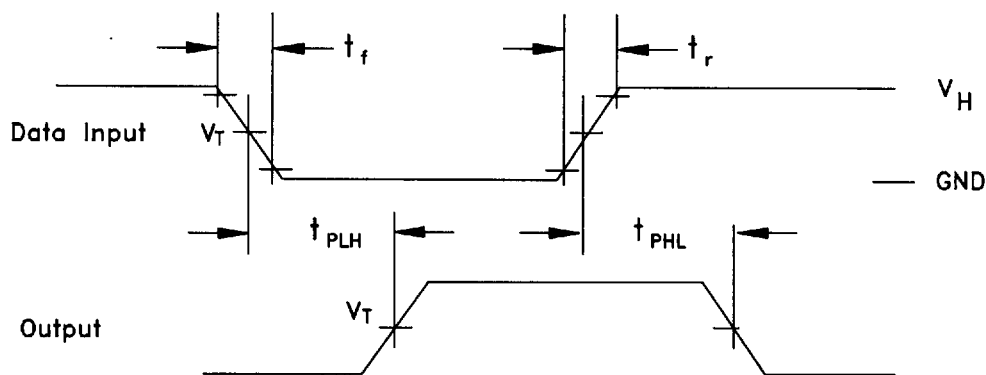
**DC ELECTRICAL CHARACTERISTICS**

| Symbol            | Parameter                             | Conditions                                                                              | V <sub>CC</sub><br>(V) | ACT10      |                   |                      | Unit |
|-------------------|---------------------------------------|-----------------------------------------------------------------------------------------|------------------------|------------|-------------------|----------------------|------|
|                   |                                       |                                                                                         |                        | TA = +25°C |                   | TA = -40<br>to +85°C |      |
|                   |                                       |                                                                                         |                        | Typ        | Guaranteed Limits |                      |      |
| V <sub>IH</sub>   | Minimum High Level Input Voltage      | V <sub>OUT</sub> = 0.1V<br>or V <sub>CC</sub> - 0.1 V                                   | 4.5                    | 1.5        | 2.0               | 2.0                  | V    |
|                   |                                       |                                                                                         | 5.5                    | 1.5        | 2.0               | 2.0                  |      |
| V <sub>IL</sub>   | Maximum Low Level Input Voltage       | V <sub>OUT</sub> = 0.1V<br>or V <sub>CC</sub> - 0.1 V                                   | 4.5                    | 1.5        | 0.8               | 0.8                  | V    |
|                   |                                       |                                                                                         | 5.5                    | 1.5        | 0.8               | 0.8                  |      |
| V <sub>OH</sub>   | Minimum High Level Output Voltage     | I <sub>OUT</sub> = -50 μA                                                               | 4.5                    | 4.49       | 4.4               | 4.4                  | V    |
|                   |                                       |                                                                                         | 5.5                    | 5.49       | 5.4               | 5.4                  |      |
| V <sub>OL</sub>   | Maximum Low Level Output Voltage      | I <sub>OUT</sub> = 50 μA                                                                | 4.5                    | 0.001      | 0.1               | 0.1                  | V    |
|                   |                                       |                                                                                         | 5.5                    | 0.001      | 0.1               | 0.1                  |      |
| V <sub>OL</sub>   | Maximum Low Level Output Voltage      | V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>I <sub>OL</sub> = 24mA<br>24 mA | 4.5                    |            | 0.36              | 0.44                 | V    |
|                   |                                       |                                                                                         | 5.5                    |            | 0.36              | 0.44                 |      |
| I <sub>IN</sub>   | Maximum Input Leakage Current         | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                | 5.5                    |            | ±0.1              | ±1.0                 | μA   |
| ΔI <sub>CCT</sub> | Additional Max I <sub>CC</sub> /Input | V <sub>IN</sub> = V <sub>CC</sub> - 2.1 V                                               | 5.5                    | 0.6        |                   | 1.5                  | mA   |
| I <sub>CC</sub>   | Maximum Quiescent Supply Current      | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                | 5.5                    |            | 4.0               | 40                   | μA   |

DataSheet4U.com

**AC CHARACTERISTICS** over full operating conditions

| Symbol           | Parameter         | V <sub>CC</sub><br>±10%<br>(V) | ACT10                                |     |                                               |      | Unit |
|------------------|-------------------|--------------------------------|--------------------------------------|-----|-----------------------------------------------|------|------|
|                  |                   |                                | TA = +25°C<br>C <sub>L</sub> = 50 pF |     | TA = -40°C to +85°C<br>C <sub>L</sub> = 50 pF |      |      |
|                  |                   |                                | Min                                  | Max | Min                                           | Max  |      |
| t <sub>PLH</sub> | Propagation Delay | 5.0                            | 1.0                                  | 9.0 | 1.0                                           | 10.0 | ns   |
| t <sub>PHL</sub> | Propagation Delay | 5.0                            | 1.0                                  | 9.0 | 1.0                                           | 9.5  | ns   |

**SWITCHING WAVEFORMS**

Input and output threshold voltage:  
 $V_T = 50\% V_{CC}$  for AC; 1.5V for ACT  
 $V_H = V_{CC}$  for AC, 3V for ACT

www.DataSheet4U.com

DataSheet4U.com