


E15C7 Series



www.DataSheet4U.com®
ECLIPTEK
CORPORATION

- RoHS Compliant (Pb-Free)
- LVPECL output oscillators
- 2.5V supply voltage
- Ceramic 6-pad SMD package
- Stability to ± 25 ppm
- Tri-State output
- Complementary output
- Available on tape and reel
- Wide range of available frequencies

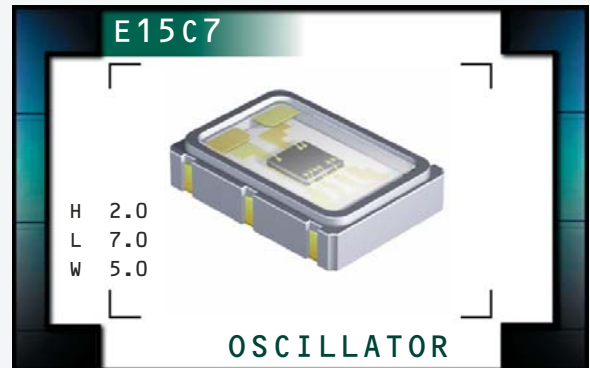

ELECTRICAL SPECIFICATIONS

| | |
|--------------------------------|---|
| Nominal Frequency (MHz) | 77.760M, 78.125M, 80M, 80.157M, 85M, 87.125M, 90M, 100M, 106.25M, 110M, 119M, 120M, 122.888M, 124.4M, 125M, 127M, 128M, 133M, 133.333M, 137.472M, 150M, 155.52M, 156.25M, 159.375M, 161.1328M, 162.5M, 166M, 170M, 175M, 176.83816M, 187.5M, 187.509375M, 200M, or 212.5MHz |
|--------------------------------|---|

| | |
|------------------------------------|--------------------------------|
| Operating Temperature Range | 0°C to 70°C, or -40°C to +85°C |
|------------------------------------|--------------------------------|

| | |
|----------------------------------|----------------|
| Storage Temperature Range | -55°C to 125°C |
|----------------------------------|----------------|

| | |
|---|------------------------------|
| Supply Voltage (V_{CC}) | 2.5V _{DC} $\pm 5\%$ |
|---|------------------------------|

| | |
|----------------------|--------------|
| Input Current | 75mA Maximum |
|----------------------|--------------|

| | | |
|--|---|--|
| Frequency Tolerance / Stability | Inclusive of All Conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, 1st Year Aging at 25°C, Shock, and Vibration | ± 100 ppm, ± 50 ppm, or ± 25 ppm Maximum |
|--|---|--|

| | | |
|--|--------------|--------------------------------|
| Output Voltage Logic High (V_{OH}) | 0°C to 85°C | $V_{CC} - 1.025V_{DC}$ Minimum |
| | -40°C to 0°C | $V_{CC} - 1.085V_{DC}$ Minimum |

| | | |
|---|--------------|--------------------------------|
| Output Voltage Logic Low (V_{OL}) | 0°C to 85°C | $V_{CC} - 1.405V_{DC}$ Maximum |
| | -40°C to 0°C | $V_{CC} - 1.305V_{DC}$ Maximum |

| | | |
|------------------------------|------------------------|----------------------------------|
| Rise Time / Fall Time | 20% to 80% of waveform | 300pSec Typical, 700pSec Maximum |
|------------------------------|------------------------|----------------------------------|

| | | |
|-------------------|--------------------|----------------|
| Duty Cycle | at 50% of waveform | 50 ± 5 (%) |
|-------------------|--------------------|----------------|

| | | |
|------------------------------|--|-----------------------------------|
| Load Drive Capability | | 50 Ohms into $V_{CC} - 2.0V_{DC}$ |
|------------------------------|--|-----------------------------------|

| | | |
|--|--|------------------------------------|
| Logic Control / Additional Output | | Complementary Output and Tri-State |
|--|--|------------------------------------|

| | | |
|--------------------------------|-------------------------------------|---------------------------------|
| Tri-State Input Voltage | V_{IH} of 70% of V_{CC} Minimum | Enables Output |
| | No Connection | Enables Output |
| | V_{IL} of 30% of V_{CC} Maximum | Disables Output: High Impedance |

| | | |
|------------------------|--------------|--------------------|
| Standby Current | Without Load | 30 μ A Maximum |
|------------------------|--------------|--------------------|

| | | |
|----------------------|--|---------------------|
| Start Up Time | | 10 mSeconds Maximum |
|----------------------|--|---------------------|

| | | |
|-------------------------|---------------------|---------------------------------|
| RMS Phase Jitter | FJ = 12kHz to 20MHz | 0.4pSec Typical, 1 pSec Maximum |
|-------------------------|---------------------|---------------------------------|

| | | |
|----------------------------|---------------|-----------------------------|
| Typical Phase Noise | Fo=156.250MHz | -60dBc/Hz at 10Hz Offset |
| | | -95dBc/Hz at 100Hz Offset |
| | | -125dBc/Hz at 1kHz Offset |
| | | -143dBc/Hz at 10kHz Offset |
| | | -145dBc/Hz at 100kHz Offset |
| | | -145dBc/Hz at 1MHz Offset |
| | | -146dBc/Hz at 10MHz Offset |

| |
|--------------------------------|
| MANUFACTURER ECLIPTEK CORP. |
|--------------------------------|

| |
|------------------------|
| CATEGORY OSCILLATOR |
|------------------------|

| |
|-----------------|
| SERIES E15C7 |
|-----------------|

| |
|--------------------|
| PACKAGE CERAMIC |
|--------------------|

| |
|-----------------|
| VOLTAGE 2.5V |
|-----------------|

| |
|---------------|
| CLASS OS1C |
|---------------|

| |
|--------------------|
| REV. DATE 01/07 |
|--------------------|

E15C7 E 2 F - 155.520M TR

**FREQUENCY TOLERANCE & STABILITY/
OPERATING TEMPERATURE RANGE**

C=±100ppm Maximum over 0°C to +70°C
 D=±50ppm Maximum over 0°C to +70°C
 E=±25ppm Maximum over 0°C to +70°C
 G=±100ppm Maximum over -40°C to +85°C
 H=±50ppm Maximum over -40°C to +85°C
 J=±25ppm Maximum over -40°C to +85°C (*)

AVAILABLE OPTIONS

Blank=Tubes
 TR=Tape and Reel (Standard)

FREQUENCY


LOGIC CONTROL/ADDITIONAL OUTPUT
 F=Complementary Output and Tri-State

DUTY CYCLE


2=50±5(%)

(*) Not available over Nominal Frequency range of 176.83816MHz to 212.500MHz


MECHANICAL DIMENSIONS
ALL DIMENSIONS IN MILLIMETERS

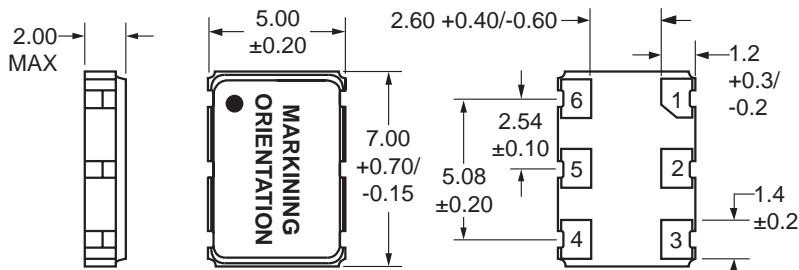


SUGGESTED SOLDER PAD LAYOUT
ALL DIMENSIONS IN MILLIMETERS

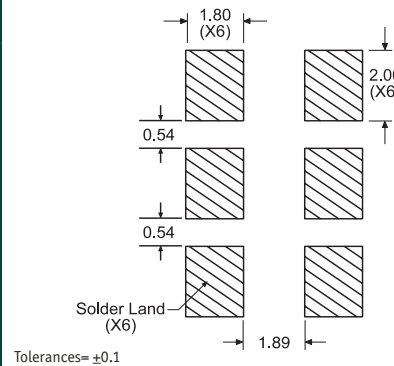

TAPE AND REEL DIMENSIONS
ALL DIMENSIONS IN MILLIMETERS

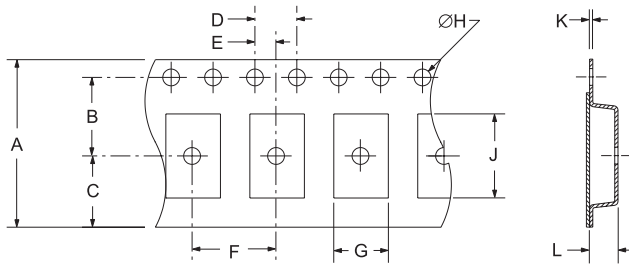

| TAPE | A | B | C | D | E |
|------|---------|-----------|---------|--------|------|
| | 16±.3-1 | 7.5±.1 | 6.75±.1 | 4 ±.1 | 2±.1 |
| F | G | H | J | K | L |
| 8±.1 | B0* | 1.5 +.1-0 | A0* | .3±.05 | K0* |

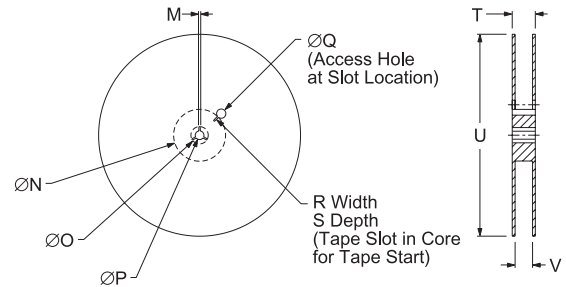

| REEL | M | N | O | P | Q |
|---------|---------|----------|----------|----------|----------|
| | 1.5 MIN | 50 MIN | 20.2 MIN | 13±.2 | 40 MIN |
| R | S | T | U | V | QTY/REEL |
| 2.5 MIN | 10 MIN | 22.4 MAX | 360 MAX | 16.4±2-0 | 1,000 |

*Compliant to EIA 481A

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

| Characteristic | Specification |
|------------------------------|---------------------------------------|
| Fine Leak Test | MIL-STD-883, Method 1014, Condition A |
| Gross Leak Test | MIL-STD-883, Method 1014, Condition C |
| Mechanical Shock | MIL-STD-202, Method 213, Condition C |
| Vibration | MIL-STD-883, Method 2007, Condition A |
| Solderability | MIL-STD-883, Method 2002 |
| Temperature Cycling | MIL-STD-883, Method 1010 |
| Resistance to Soldering Heat | MIL-STD-202, Method 215 |
| Resistance to Solvents | MIL-STD-202, Method 215 |

MARKING SPECIFICATIONS

Line 1: ECLIPTEK
 Line 2: XX.XXX M
 Line 3: XX Y ZZ

Frequency in MHz (5 Digits Maximum + Decimal)
 Week of Year
 Last Digit of Year
 Ecliptek Manufacturing Identifier

| MANUFACTURER | CATEGORY | SERIES | PACKAGE | VOLTAGE | CLASS | REV. DATE |
|----------------|------------|--------|---------|---------|-------|-----------|
| ECLIPTEK CORP. | OSCILLATOR | E15C7 | CERAMIC | 2.5V | OS1C | 01/07 |