

E15LBWB1BA-HAF


ESD Protection Diode

Features

- Low clamping voltage
- Low capacitance
- Halogen and Antimony Free(HAF),
RoHS compliant

PINNING

PIN	DESCRIPTION
1	Cathode
2	Cathode

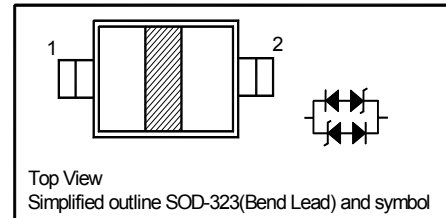


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20 \mu\text{s}$)	P_{PK}	350	W
Peak Current Pulsed ($t_p = 8/20 \mu\text{s}$)	I_{PP}	10	A
ESD (IEC61000-4-2) Air Contact	V_{ESD}	± 15 ± 8	KV
Operating Junction Temperature Range	T_j	- 55 to + 125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Reverse Stand-off Voltage	V_{RWM}	-	15	V
Reverse Breakdown Voltage at $I_R = 1 \text{ mA}$	$V_{(BR)R}$	17.39	-	V
Reverse Current at $V_{RWM} = 15 \text{ V}$	I_R	-	1	μA
Clamping Voltage at $I_{PP} = 1 \text{ A}$, $t_p = 8/20 \mu\text{s}$ at $I_{PP} = 10 \text{ A}$, $t_p = 8/20 \mu\text{s}$	V_C	- -	24 31.8	V
Junction Capacitance at $V_R = 0 \text{ V}$, $f = 1 \text{ MHz}$	C_j	-	3	pF



E15LBWB1BA-HAF

Electrical Characteristics Curves

Fig 1. Pulse Waveform

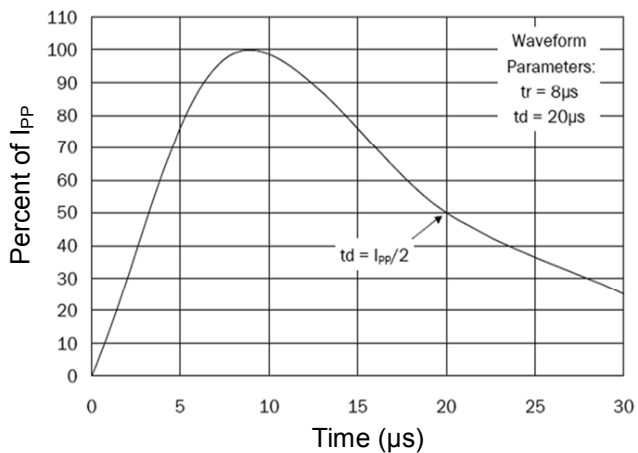


Fig 2. Power Derating Curve

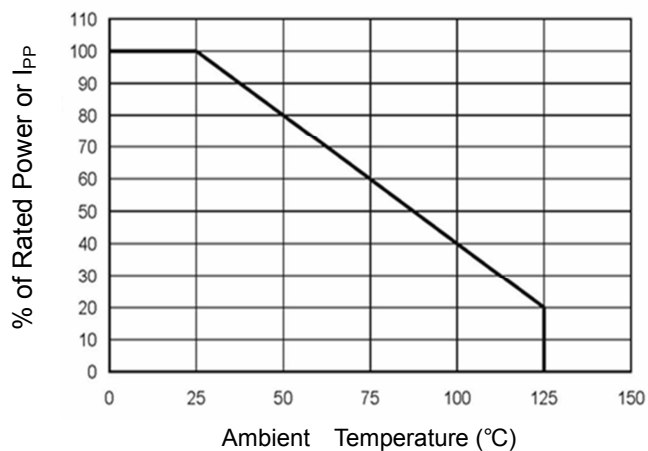


Fig 3. Clamping Voltage Curve



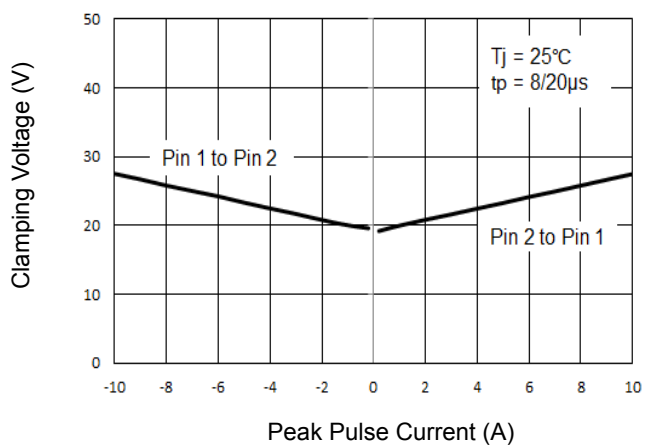


Fig 4. Junction Capacitance

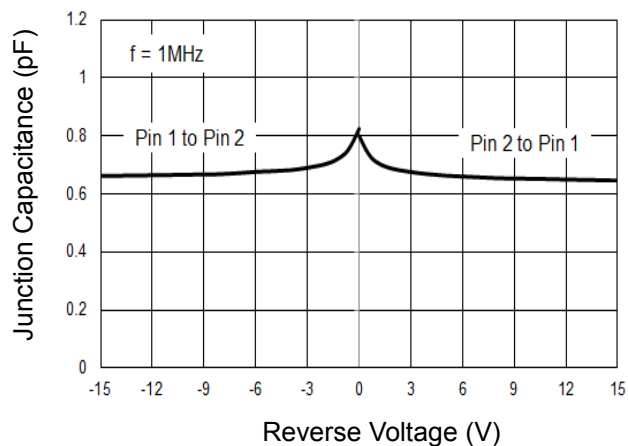


E15LBWB1BA-HAF

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-323(Bend Lead)

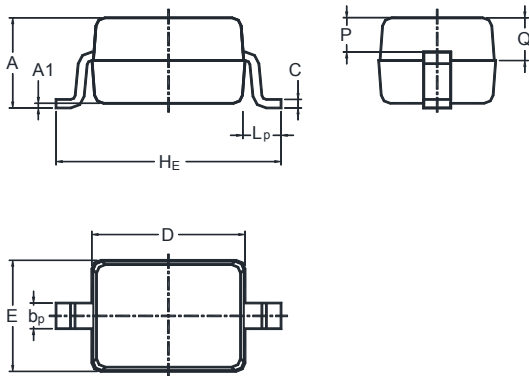

UNIT	A	A ₁	b _p	C	D	E	H _E	L _p	Q	P
mm	1.1 0.8	0.1 0	0.4 0.25	0.18 0.09	1.8 1.6	1.35 1.15	2.8 2.3	0.5 0.1	0.5 0.3	0.4 0.3

Recommended Soldering Footprint




Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-323BL	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Marking information

" W3V " = Part No.
" III " = Marking Line
" • " = HAF (Halogen and Antimony Free)
Font type: Arial



Disclaimer: Our company reserve the right to make modifications, enhancements, improvements, corrections or other changes to improve product design, functions and reliability, anytime without notice. Semtech Electronics Limited makes no warranties, representations or warranties regarding the suitability of its products for any particular purpose, and does not accept any liability arising from the application or use of any product or circuit such as: Apply to medical, military, aircraft, space or life support equipment and expressly waive any and all liability, including but not limited to special, consequential or collateral damage.

