

S.Q. TUBE

Special quality pentode designed for use as wide band amplifier.



QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	300 mA
Anode current	I_a	13 mA
Mutual conductance	S	16.5 mA/V
Equivalent noise resistance	R_{eq}	330 Ω
Hum voltage	V_{g1} max.	100 μ V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



CHARACTERISTICS

- Column I Nominal value or setting of the tube
- II Range values for equipment design: Initial spread
- III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	300	285- 315		mA
Anode supply voltage	V_{ba}	190			V
Grid No.3 voltage	V_{g3}	0			V
Grid No.2 supply voltage	V_{bg2}	160			V
Grid No.1 supply voltage	V_{bg1}	9			V
Cathode resistor	R_k	630			Ω
Anode current	I_a	13	12.2-13.8	min. 11.5	mA
Grid No.2 current	I_{g2}	3.3	2.9- 3.7		mA
Mutual conductance	S	16.5	14.2-18.8	min. 11	mA/V
Amplification factor grid No.2 to grid No.1	μ_{g2g1}	50			
Internal resistance	R_i	90	min. 45		k Ω
Equivalent noise resistance	R_{eq}	330	max. 650		Ω
Negative grid No.1 current	$-I_{g1}$		max. 0.5	max. 1.0	μA
<u>Equivalent grid hum voltage</u>	V_{g1}		max. 100		μV_{RMS}
Grid resistor $R_{g1} = 0.5 M\Omega$ Centre tap of heater trans- former grounded					
<u>Distortion</u>	d_2	1.6			%
Load resistor $R_a = 1 k\Omega$ Input voltage $V_i = 100 mV_{RMS}$					
Cathode heating time		12	max. 18		sec

CHARACTERISTICS (continued)

		I	II	
Anode supply voltage	V_{ba}	180		V
Grid No.3 voltage	V_{g3}	0		V
Grid No.2 supply voltage	V_{bg2}	150		V
Cathode resistor	R_k	100		Ω
Anode current	I_a	11.5		mA
Grid No.2 current	I_{g2}	2.9		mA
Mutual conductance	S	15.5		mA/V
<u>Cut-off voltage</u>	$-V_{g1}$		max. 4.5	V
Anode voltage	V_a	180		V
Grid No.2 voltage	V_{g2}	150		V
Grid No.3 voltage	V_{g3}	0		V
Anode current	I_a	0.8		mA
<u>Start of grid No.1 current</u>	$-V_{g1}$		max. 0.5	V
Grid No.1 current $I_{g1} = 0.3 \mu A$				
<u>Input resistance</u>	r_{g1}	2000		Ω
Frequency = 100 MHz				
<u>Phase angle of the slope</u>		9		0
Frequency = 50 MHz				
Pin 1 connected to pin 3				
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 15	μA
Voltage between cathode and heater $V_{kf} = 60 V$				
<u>Insulation resistance between two electrodes</u>			min. 20	$M\Omega$

CHARACTERISTICS AS TRIODE

(g_2 connected to anode)

		I	II	
Anode supply voltage	V_{ba}	160		V
Grid No.3 voltage	V_{g3}	0		V
Grid No.1 voltage	$+V_{bg1}$	9		V
Cathode resistor	R_k	620		Ω
Anode current	I_a	16.5		mA
Mutual conductance	S	21		mA/V
Amplification factor	μ	50		
Internal resistance	R_i	2.4		k Ω
Equivalent noise resistance	R_{eq}	225		Ω

CAPACITANCES With external shield

Anode to grid No.3, grid No.2, cathode and heater	C_{a/g_3g_2kf}	3	2.5 - 3.5	pF ¹⁾
Grid No.1 to grid No.3, grid No.2, cathode and heater				
($I_k = 0$ mA)	: C_{g_1/g_3g_2kf}	7.5	6.6 - 8.4	pF ¹⁾
($I_k = 16.3$ mA, $f = 100$ MHz)	: C_{g_1/g_3g_2kf}	11.1		pF ¹⁾
Anode to grid No.1	C_{ag_1}	0.018	max. 0.03	pF
Anode to cathode	C_{ak}		max. 0.1	pF
Grid No.1 to heater	C_{g_1f}		max. 0.1	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal-operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

¹⁾ Pin No.6 left floating

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	V_{ba}	190	V
Grid No.3 voltage	V_{g3}	0	V
Grid No.2 supply voltage	V_{bg2}	160	V
Grid No.1 supply voltage	$+V_{bg1}$	9	V
Cathode resistor	R_k	630	Ω


LIMITING VALUES (Absolute max. rating system)



Anode voltage	V_{a0}	max.	400	V
	V_a	max.	210	V
Anode dissipation	W_a	max.	3	W
Grid No.2 voltage	V_{g20}	max.	400	V
	V_{g2}	max.	175	V
Grid No.2 dissipation	W_{g2}	max.	0.9	W
Cathode current	I_k	max.	25	mA
Grid No.1 voltage	$+V_{g1}$	max.	0	V
	$-V_{g1}$	max.	50	V
Grid No.1 peak voltage	$-V_{g1p}$	max.	100	V
Grid resistor, fixed bias	R_{g1}	max.	0.25	$M\Omega$
	automatic bias	R_{g1}	max.	0.5
Voltage between cathode and heater	V_{kf}	max.	60	V
Bulb temperature	t_{bulb}	max.	155	$^{\circ}C$


Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

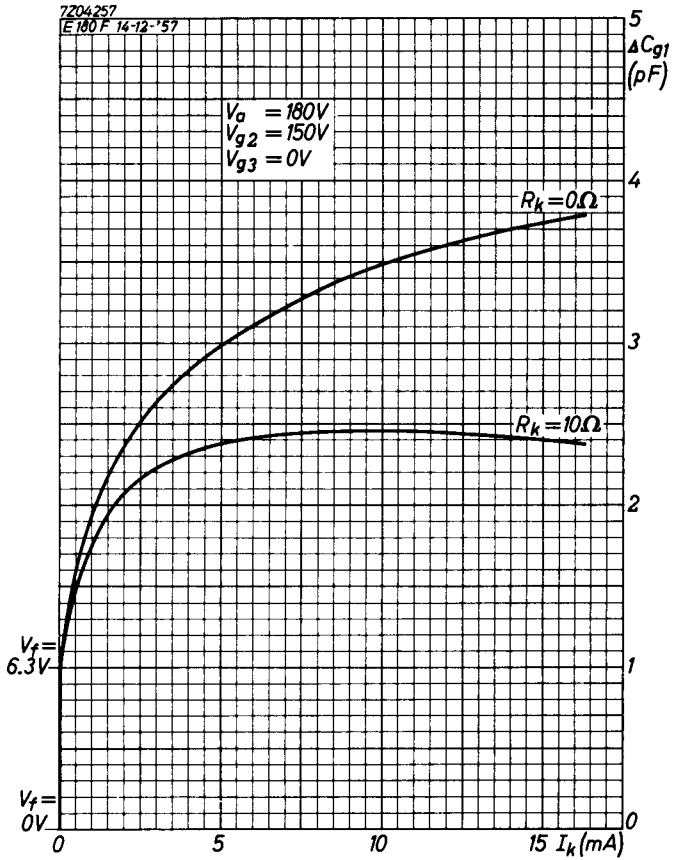

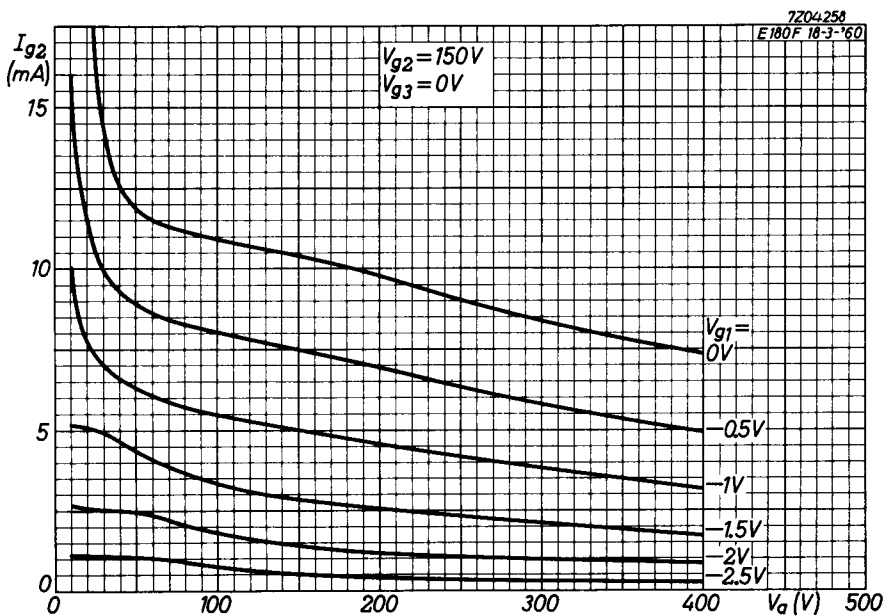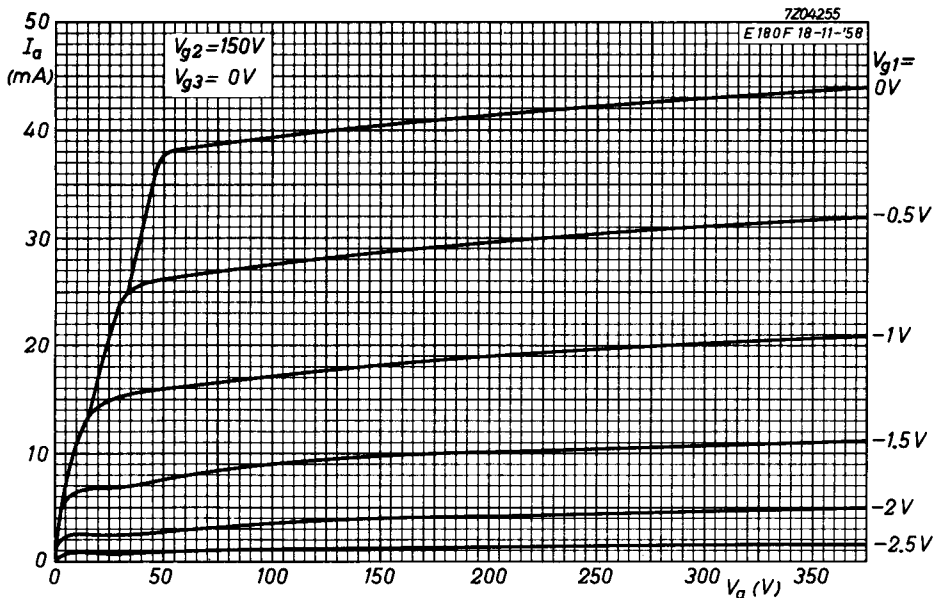

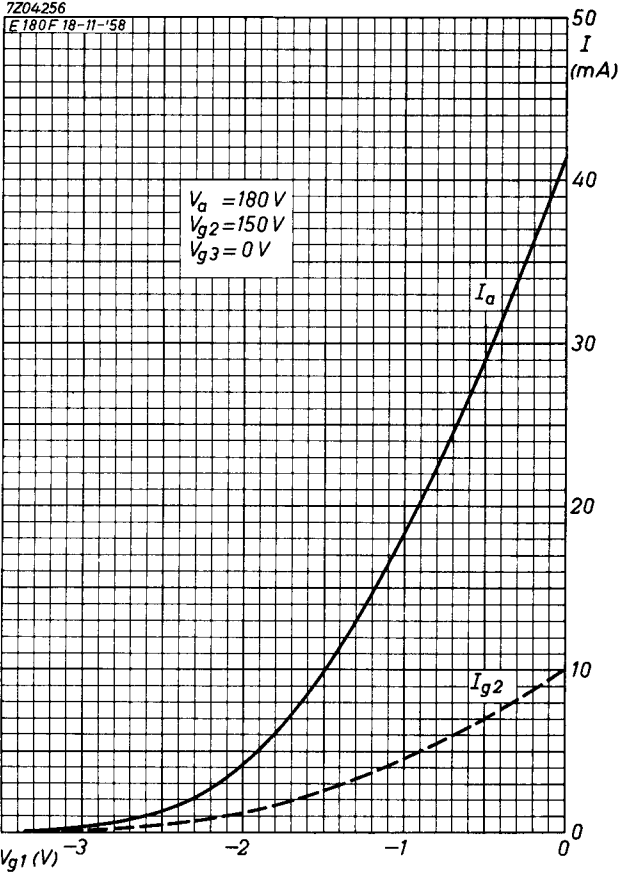

PHILIPS

Data handbook



Electronic
components
and materials

E180F

page	sheet	date
1	1	1968.12
2	2	1968.12
3	3	1968.12
4	4	1968.12
5	5	1968.12
6	6	1968.12
7	7	1968.12
8	8	1968.12
9	FP	2000.12.03