


# E1M Series

- RoHS Compliant (Pb-Free)
- UM-1 package
- AT cut
- Tight tolerance/stability
- Frequencies to 150.000MHz available



www.DataSheet4U.com®  
ECLIPTEK CORPORATION

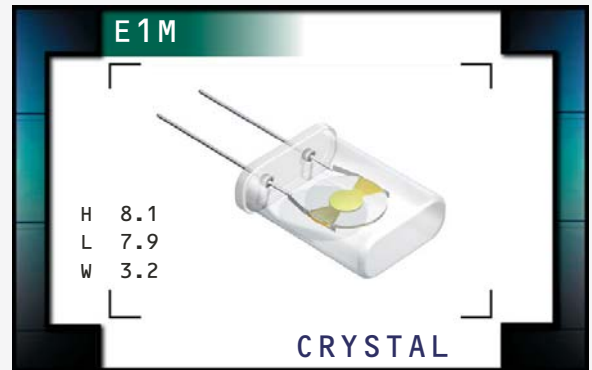

## NOTES

TABLE 1: PART NUMBERING CODES				
FREQUENCY STABILITY	X = Available N/A = Not Available	OPERATING TEMPERATURE RANGE		
		0°C to 50°C	-20°C to 70°C	-40°C to 85°C
	Code	A	B	C
	±10ppm	B	X	X
±15ppm	C	X	X	X
±30ppm	D	X	X	X

## ELECTRICAL SPECIFICATIONS

Frequency Range	10.000MHz to 150.000MHz
Frequency Tolerance	±10ppm or ±15ppm
Frequency Stability	Per Table 1
Operating Temperature Range	Per Table 1
Aging (at 25°C)	±1ppm / year Maximum
Storage Temperature Range	-55°C to 125°C
Shunt Capacitance	7pF Maximum
Insulation Resistance	500 Megaohms Minimum at 100V <sub>DC</sub>
Load Capacitance (C <sub>L</sub> )	8pF Parallel Resonant to 50pF Parallel Resonant, or Series Resonant

## EQUIVALENT SERIES RESISTANCE (ESR), MODE OF OPERATION (MODE), CUT, AND DRIVE LEVEL

Frequency Range	ESR (Ω)	Mode / Cut	Drive Level (μW)
10.000MHz to 15.999MHz	50 Maximum	Fundamental / AT	50 Maximum
16.000MHz to 60.000MHz	40 Maximum	Fundamental / AT	10 Maximum
30.000MHz to 150.000MHz	70 Maximum	Third Overtone / AT	100 Maximum
80.000MHz to 100.000MHz	150 Maximum	Fifth Overtone / AT	100 Maximum
100.001MHz to 120.000MHz	120 Maximum	Fifth Overtone / AT	100 Maximum
120.001MHz to 150.000MHz	100 Maximum	Fifth Overtone / AT	100 Maximum

MANUFACTURER  
ECLIPTEK CORP.

CATEGORY  
CRYSTAL

SERIES  
E1M

PACKAGE  
UM-1

CLASS  
CR10

REV. DATE  
03/08

### PART NUMBERING GUIDE

**E1M 2 C B A 20 - 30.000M**

**FREQUENCY TOLERANCE (AT 25°C)**

2=±10ppm  
3= ±15ppm

**FREQUENCY STABILITY**

B=±10ppm  
C=±15ppm  
D=±30ppm

**OPERATING TEMPERATURE RANGE**

A=0°C to 50°C  
B=-20°C to 70°C  
C=-40°C to 85°C

**FREQUENCY**

**LOAD CAPACITANCE**

S=Series Resonant  
XX=8pF Parallel Resonant to 50pF Parallel Resonant


**MODE OF OPERATION**

A=Fundamental  
B=Third Overtone  
C=Fifth Overtone

### NOTES

#### MECHANICAL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

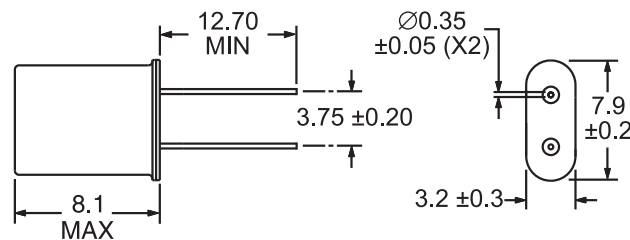

#### ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

PARAMETER	SPECIFICATION
ESD Susceptibility	MIL-STD-883, Method 3015, Class 1, HBM: 1500V
Fine Leak Test	MIL-STD-883, Method 1014, Condition A
Flammability	UL94-V0
Gross Leak Test	MIL-STD-883, Method 1014, Condition C
Lead Integrity	MIL-STD-833, Method 2004
Mechanical Shock	MIL-STD-202, Method 213, Condition C
Moisture Resistance	MIL-STD-883, Method 1004
Moisture Sensitivity	J-STD-020, MSL 1
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K
Resistance to Solvents	MIL-STD-202, Method 215
Solderability	MIL-STD-883, Method 2003
Temperature Cycling	MIL-STD-883, Method 1010, Condition B
Vibration	MIL-STD-883, Method 2007, Condition A

#### MARKING SPECIFICATIONS

Line 1: E XX.XX  
Frequency in MHz  
(4 Digits Maximum + Decimal)

Line 2: XXXXX  
Ecliptek Manufacturing Identifier

MANUFACTURER  
ECLIPTEK CORP.

CATEGORY  
CRYSTAL

SERIES  
E1M

PACKAGE  
UM-1

CLASS  
CR10

REV. DATE  
03/08