

## PHILIPS „MINIWATT“

|                                       |                    |                      |
|---------------------------------------|--------------------|----------------------|
| Heizspannung .....                    | $v_f$              | = 4,0 V              |
| Tension de chauffage .....            |                    |                      |
| Filament voltage .....                |                    |                      |
| Heizstrom .....                       |                    | ca.                  |
| Courant de chauffage .....            | $i_f$              | = env. 1,0 A         |
| Filament current .....                |                    | appr.                |
| Anodenspannung .....                  | $v_{amax.}$        | = 200 V              |
| Tension anodique .....                |                    |                      |
| Anode voltage .....                   |                    |                      |
| Normaler Anodenstrom .....            |                    |                      |
| Courant anodique normal .....         | $i_a$              | = 6 mA               |
| Normal anode current .....            |                    |                      |
| Neg. Gittervorspannung .....          |                    | ca.                  |
| Polarisation négative de grille ..... | $v_g$              | = env. 3,5 V         |
| Negative grid bias .....              |                    | appr.                |
| Verstärkungsfaktor .....              | $g(k)$             | = 28                 |
| Coefficient d'amplification .....     |                    |                      |
| Amplification factor .....            |                    |                      |
| Steilheit (max.) .....                | $S_{max.}$         | = 3,5 mA/V           |
| Inclinaison (max.) .....              |                    |                      |
| Slope (max.) .....                    |                    |                      |
| Steilheit (norm.) .....               | $S_{norm.}$        | = 2,4 mA/V           |
| Inclinaison (norm.) .....             |                    |                      |
| Slope (norm.) .....                   |                    |                      |
| Innerer Widerstand (norm.) .....      | $R_i$              | = 11500 Ohm          |
| Résistance intérieure (norm.) .....   |                    |                      |
| Internal resistance (norm.) .....     |                    |                      |
| Anoden-Gitterkapazität .....          | $C_{ag}$           | = 2 $\mu\mu\text{F}$ |
| Capacité grille-plaque .....          |                    |                      |
| Anode-grid capacity .....             |                    |                      |
| Max. Länge ..                         | $l$                | = 97 mm              |
| Longueur max. ....                    |                    |                      |
| Overall length .....                  |                    |                      |
| Grösster Durchmesser .....            | $d$                | = 50 mm              |
| Diamètre max. ....                    |                    |                      |
| Max. diameter .....                   |                    |                      |
| Sockel .....                          |                    |                      |
| Culot .....                           |                    | = 0 35               |
| Base .....                            |                    |                      |
| Sockelschaltung .....                 |                    | = S. VII             |
| Connexion du culot .....              |                    |                      |
| Base connection .....                 |                    |                      |
| Anwendung: Audion                     |                    |                      |
| Applications: Détecteur               |                    |                      |
| Function: Detector                    |                    |                      |
|                                       | N.F.-Verstärkung   |                      |
|                                       | Amplification b.f. |                      |
|                                       | L.F. amplification |                      |
|                                       | Oszillator         |                      |
|                                       | Oscillateur        |                      |
|                                       | Oscillator         |                      |

**PHILIPS  
MINIWATT  
E 428**

$V_f = 4,0 V$   
 $V_{a\max} = 200V$   
 $I_a = 6 mA$   
 $S_{\max} = 3,5 mA/V$   
 $S_{\text{norm}} = 2,4 mA/V$   
 $g(k) = 28$

24  $I_a$  (mA)

20

16

12

8

4


$V_a = 200V$

$V_a = 150V$

$V_a = 100V$

$V_g$  (V)

-12 -10 -8 -6 -4 -2 0 2 4

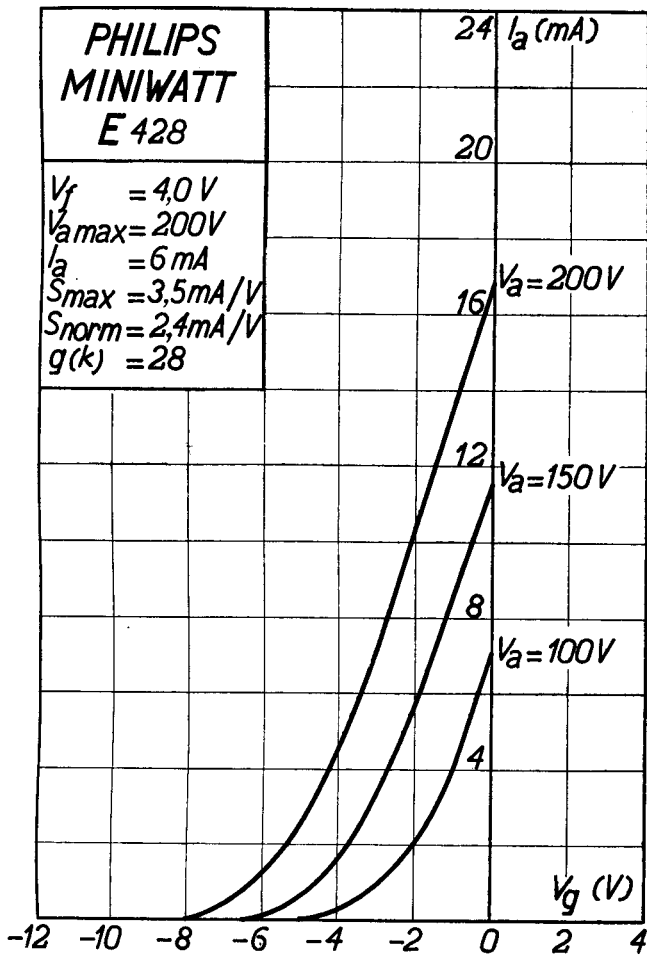

## PHILIPS „MINIWATT“

|   |          |                        |
|---|----------|------------------------|
| Max. Anodenspannung .....                 | $V_{ao}$ | = 400 V                |
| Tension anodique max. ....                | $V_{aR}$ | = 250 V                |
| Max. anode voltage .....                  | $V_{aL}$ | = 200 V                |
| Max. Anodenbelastung .....                |          |                        |
| Dissipation anodique max. ....            | $W_a$    | = 1,5 W                |
| Max. anode dissipation .....              |          |                        |
| Max. Kathodenstrom .....                  |          |                        |
| Courant cathodique max. ....              | $I_c$    | = 15 mA                |
| Max. cathode current .....                |          |                        |
| Gitterstrom-Einsatzpunkt .....            |          |                        |
| Point de commenc. du courant de grille    | $V_{gi}$ | = -1,3 V               |
| Starting point of grid current .....      |          |                        |
| Max. Widerstand im Gitterkreis .....      | $R_{g1}$ | = 2,0 M. Ohm           |
| Résistance max. dans le circuit de grille | $R_{g2}$ | = 1,0 M. Ohm           |
| Max. resistance in grid circuit .....     |          |                        |
| Max. Spann. zwischen Faden und Kath.      |          |                        |
| Tension max. entre filament et cathode    | $V_{fc}$ | = 50 V <sup>*)</sup>   |
| Max. voltage between filam. and cathode   |          |                        |
| Max. Widerst. zwischen Faden und Kath.    |          |                        |
| Résist. max. entre filament et cathode    | $R_{fc}$ | = 20000 Ohm            |
| Max. resist. betw. filament and cathode   |          |                        |
| Kapazitäten .....                         | $C_{ag}$ | = 2 $\mu\mu\text{F}$   |
| Capacités .....                           | $C_{ak}$ | = 7 $\mu\mu\text{F}$   |
| Capacities .....                          | $C_{gk}$ | = 5,5 $\mu\mu\text{F}$ |

\*) Siehe Erläuterungen  
Voir explications  
See explanation

**PHILIPS  
MINIWATT  
E428**

