


DIODE

Heating : indirect by A.C. or D.C.
parallel supply
 Chauffage : indirect par C.A. ou C.C.
alimentation- parallèle
 Heizung : indirekt durch Wechsel-
oder Gleichstrom; Parallel-
speisung

$V_f = 6,3 \text{ V}$

$I_f = 0,15 \text{ A}$

Dimensions in mm
 Dimensions en mm
 Abmessungen in mm



Capacitance
 Capacités
 Kapazitäten


$C_{dk} = 2,1 \text{ pF}$

Limiting values
 Caractéristiques limites
 Grenzdaten

$V_d \text{ inv}_p = \text{max. } 560 \text{ V}$
 $I_d = \text{max. } 5 \text{ mA}$
 $I_{dp} = \text{max. } 30 \text{ mA}$
 $V_{kf} = \text{max. } 100 \text{ V}$
 $R_{kf} = \text{max. } 20 \text{ k}\Omega$

EA 50

PHILIPS

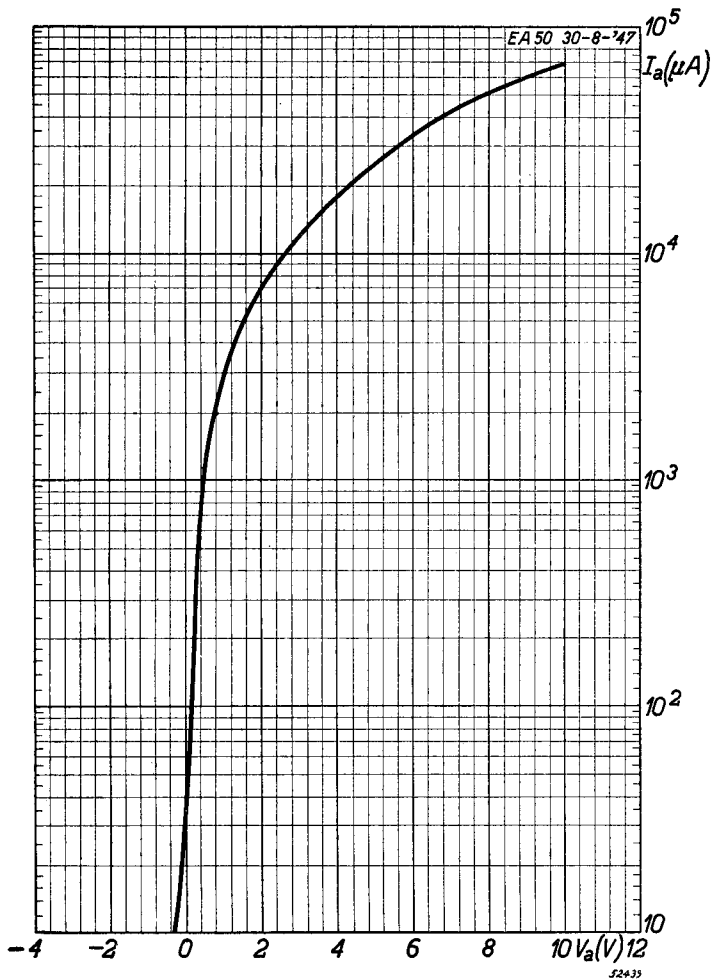

PHILIPS



*Electronic
Tube*

HANDBOOK

page	EA50 sheet	date
1	1	1953.11.11
2	A	1953.11.11
3	FP	1999.04.10