



EBRT15L80D



Excellent Schottky Barrier Rectifiers



DO-201AD

Primary Characteristics		
I_F	15	A
V_{RRM}	80	V
I_{FSM}	250	A
V_F	0.65	V
$T_J \text{ max}$	150	°C

Features
• High current capability • High surge current capability • Low reverse current • Component in accordance to RoHS 2002/95/EC

Mechanical Data
• Cases: DO-201AD • Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 • Terminals: Lead free Plating (Tin Finish) Solderable per MIL-STD-202, Method 208 • Polarity: Cathode Band • Weight: 1.071 grams (approximate)

Ordering Information			
Part No.	Remark	Package	Packing
EBRT15L80D	General	DO-201AD	1200 / Ammo Box
EBRT15L80D-H	Halogen Free		

Maximum Ratings (TA=25°C unless otherwise noted)			
PARAMETER	SYMBOL	EBRT15L80D	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	80	V
Maximum RMS voltage	V_{RMS}	56	V
Maximum DC blocking voltage	V_{DC}	80	V
Maximum average forward rectified current	I_F	15	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	250.0	A
Maximum Instantaneous Forward Voltage $I_F=3A @ 25^{\circ}C$ $I_F=15A @ 25^{\circ}C$	V_F	0.46 Typ. 0.65 Max.	V
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=100°C	I_R	0.2 10	mA
Typical Junction Capacitance(NOTE1)	C_j	1080	pF
Typical Thermal Resistance	$R_{\theta JC}$	10	°C/W
Operating Temperature Range	T_J	-55 to +150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C
Marking Code		T10L80D、10L80D	

NOTES:

1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



Excellent Schottky Barrier Rectifiers

Rating and Characteristics Curves

FIG. 1-Typical Forward Current Derating Curve

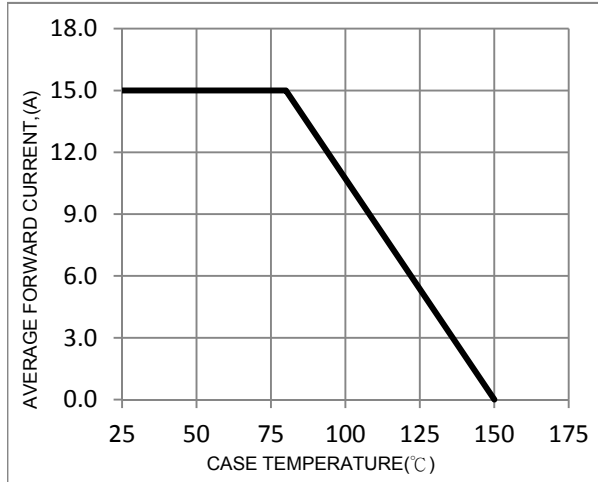


FIG. 2-Typical Forward Characteristics

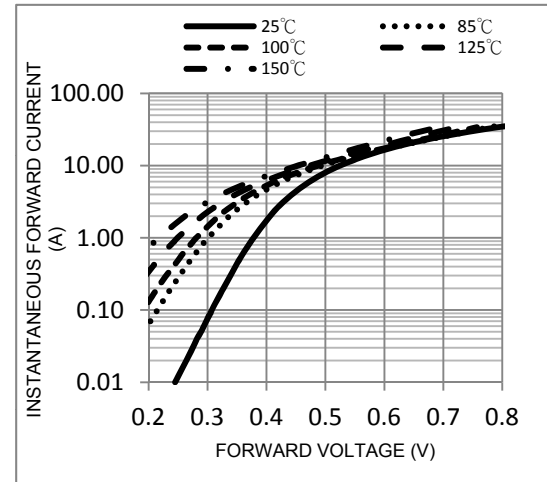


FIG. 3-Maximum Non-Repetitive Forward Surge Current

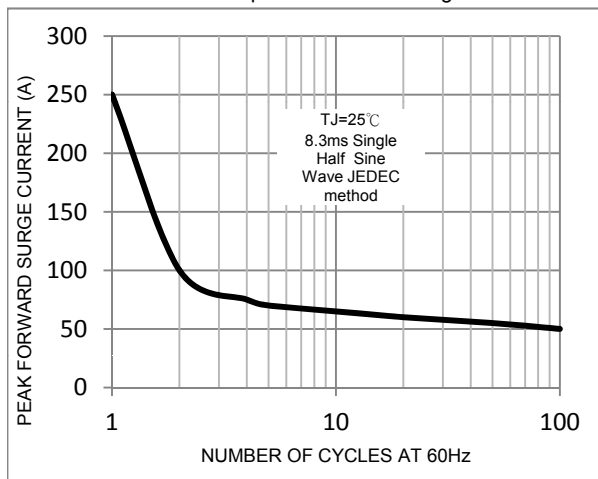


FIG. 4-Typical Reverse Characteristics


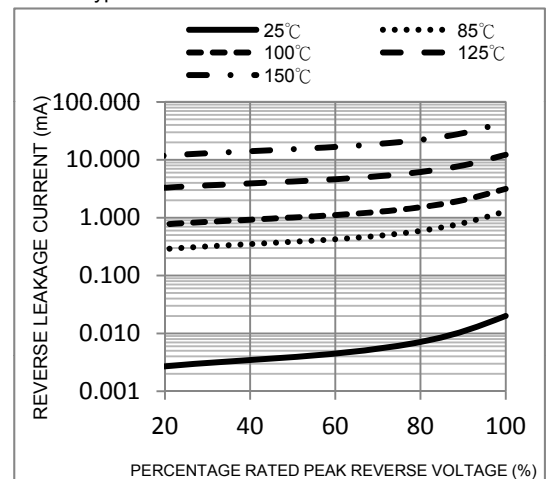


FIG. 5-Typical Junction Capacitance






EBRT15L80D

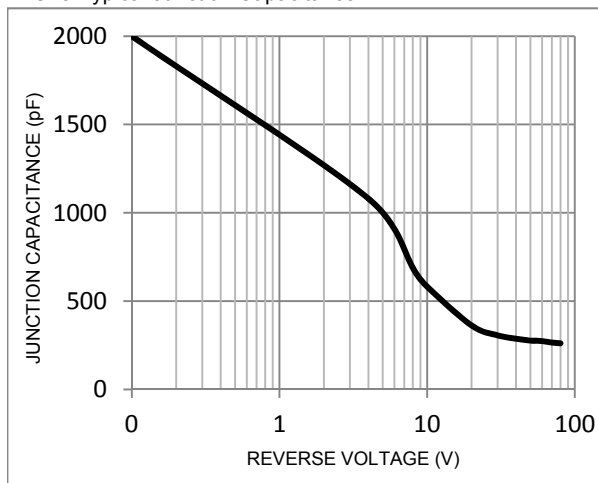

Excellent Schottky Barrier Rectifiers


Package Outline Dimensions

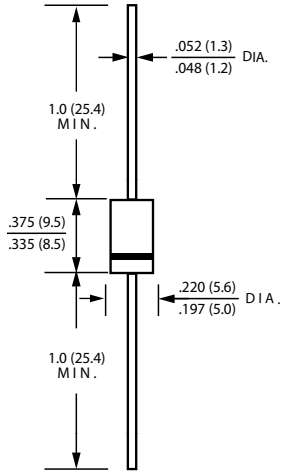

DO-201AD

Dimensions in inches and (millimeters)

Marking Information

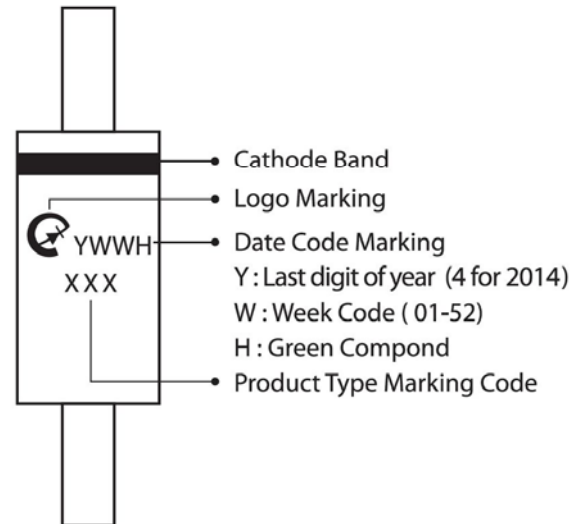

Ammo Box Packing

Package	Inner	BOX	Inner Box	Carton	Carton Size	Gross Weight
	Pack	(EA)	(mm)	(EA)	(mm)	(Kg)-Approx.
DO-201AD(DO-27)-52mm	Reel	1,200	255x75x150	12000	440x280x335	16