

ECM Surface Mount Oscillator

ECXO62-63


- Tri-state HCMOS / TTL
- 3.3V Version Available
- SMD Ceramic Package
- Low Profile

www.DataSheet4U.com




Parameter	ECXO62 - 63	
Frequency Range	1.80MHz to 50.0MHz	Specify
Frequency Stability	+/-50ppm (B) +/-100ppm (C)	Specify
Supply Voltage	5V +/-5% 3.3V +/-5%	ECXO62 ECXO63
Supply Current	40mA max Frequency dependent	
Load	50pF / 10TTL 15pF / 10LSTTL	ECXO62 ECXO63
Duty Cycle	40 / 60	
Rise & Fall Times	5ns max 6nS max	ECXO62 ECXO63
Start-up Time	10mS max	
Operating Temp	-10°C to +70°C (S) -40°C to +85°C (H) 100ppm only	
Storage Temp	-40°C to +85°C	

Environmental & Mechanical	
Mechanical Shock	JIS-C-6701
Thermal Shock	JIS-C-9701
Vibration	JIS-C-6701
Soldering Condition	230°C for 10s max
Hermetic Seal	JIS-C-6701

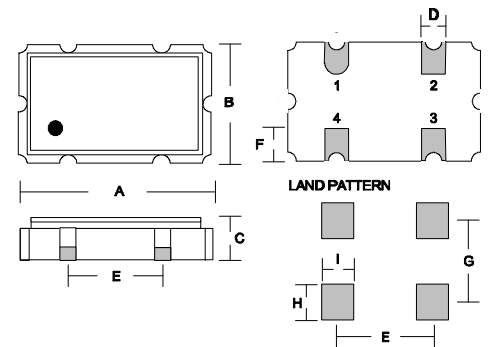

Part Numbering ECXO62 H 25.00M B

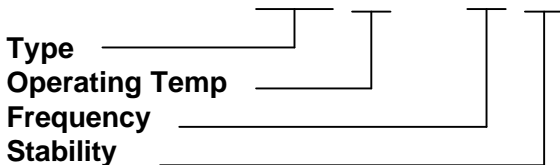

Pin	1	2	3	4
Function	E/D	GND	O/P	VDD

A	B	C	D	E	F	G	H
6.00	3.50	1.40	1.00	2.54	1.00	2.40	1.40

Dimensions in mm

ECM Electronics Limited, Penmaen House, Ashington, West Sussex, RH20 3JR, UK
 Tel: +44(0)1903 892810: Fax: +44(0)1903 892738. Email: ecm@ecmelectronics.co.uk

Although we have attempted to accurately reflect the products we market. ECM reserve the right without prior notice to discontinue any product or make design changes we believe necessary. www.DataSheet4U.com
 Issue 1