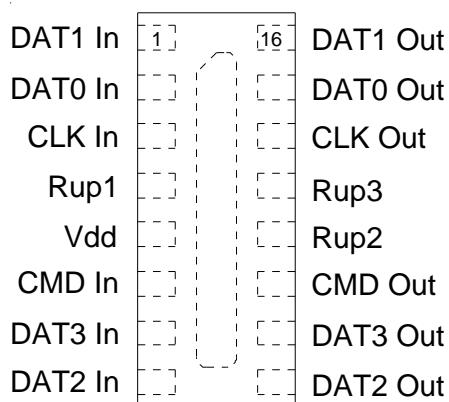


PROTECTION PRODUCTS - EMIClamp®
Description

The EClamp[®]2410PQ is a combination EMI filter and line termination device with integrated TVS diodes for use on Multimedia Card interfaces. This state-of-the-art device utilizes solid-state silicon-avalanche technology for superior clamping performance and DC electrical characteristics. They have been optimized for protection of **T-Flash/MicroSD interfaces** in cellular phones and other portable electronics.

The device consists of six circuits that include series impedance matching resistors and pull up resistors as required by the SD specification. TVS diodes are included on each line for ESD protection. An additional TVS diode connection is included for protection of the voltage (Vdd) bus. Termination resistor value of 45 Ohms is included on the DAT0, DAT1, DAT2, DAT3, CMD, and CLK lines. Pull up resistors of 15k Ohms are included on DAT0, DAT1, DAT2, and CMD lines while a 50k Ohm pull up is included on the DAT3 line. These may be configured for devices operating in SD or SPI mode. The TVS diodes provide effective suppression of ESD voltages in excess of $\pm 15\text{kV}$ (air discharge) and $\pm 8\text{kV}$ (contact discharge) per IEC 61000-4-2, level 4. The EClamp2410PQ is in a 16-pin, RoHS/WEEE compliant, SLP4016P16 package. It measures 4.0 x 1.6 x 0.58mm. The leads are spaced at a pitch of 0.5mm and are finished with lead-free NiPdAu. The EClamp2410PQ is qualified to AEC-Q100 Grade1 for Automotive use.

Pin Configuration

Pin Designation (Top View)
Features

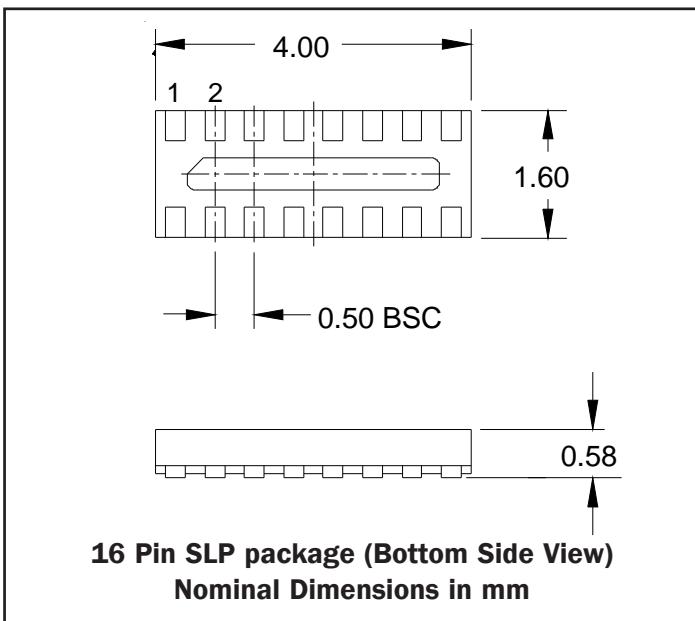
- ◆ Bidirectional EMI/RFI filtering and line termination with integrated ESD protection
- ◆ ESD protection to IEC 61000-4-2 (ESD) Level 4, $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
- ◆ TVS working voltage: 5V
- ◆ Termination Resistors: 45Ω
- ◆ Pull Up Resistors: $15\text{k}\Omega$ (3 each) and $50\text{k}\Omega$
- ◆ Typical Capacitance per Line: 12pF ($\text{VR} = 2.5\text{V}$)
- ◆ Protection and termination for six lines + Vdd
- ◆ Solid-state technology
- ◆ AEC-Q100 Grade1 Qualified

Mechanical Characteristics

- ◆ SLP4016P16 16-pin package
- ◆ RoHS/WEEE Compliant
- ◆ Nominal Dimensions: 4.0 x 1.6 x 0.58 mm
- ◆ Lead Pitch: 0.5mm
- ◆ Lead finish: NiPdAu
- ◆ Marking: Marking Code
- ◆ Packaging: Tape and Reel

Applications

- ◆ T-Flash / MicroSD Interfaces
- ◆ MMC Interfaces
- ◆ CDMA, GSM, 3G Cell Phones
- ◆ Automotive Applications

Package Configuration


PROTECTION PRODUCTS
Absolute Maximum Ratings

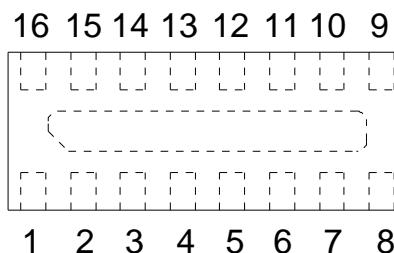
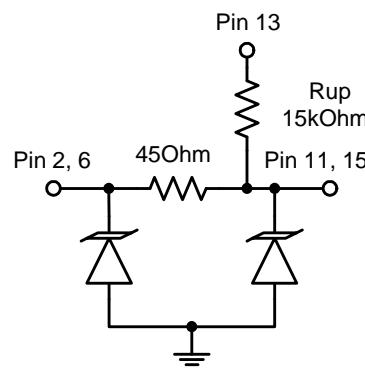

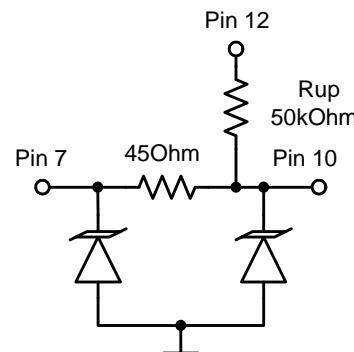
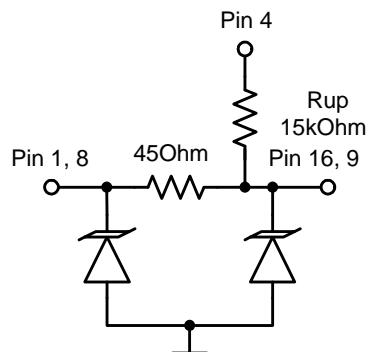
Rating	Symbol	Value	Units
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	+/- 17 +/- 12	kV
Junction Temperature	T_J	125	°C
Ambient Operating Temperature	T_A	-40 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

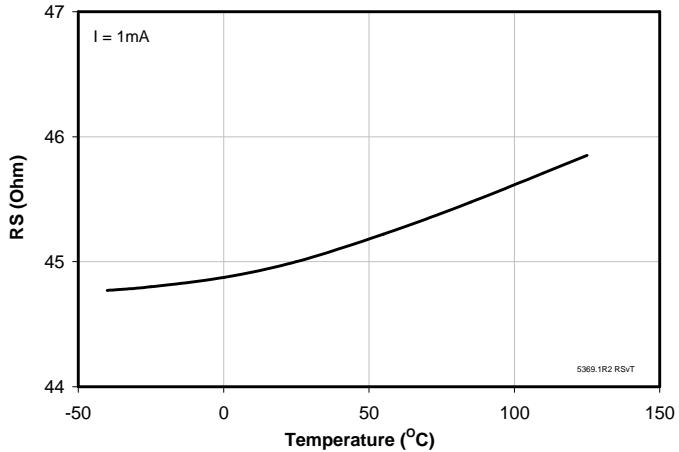
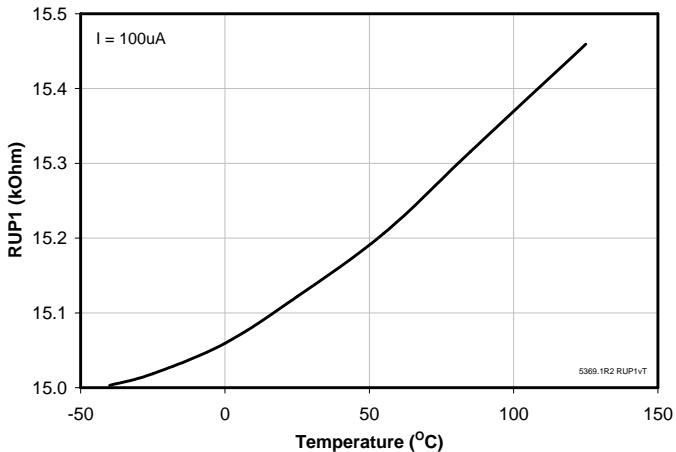
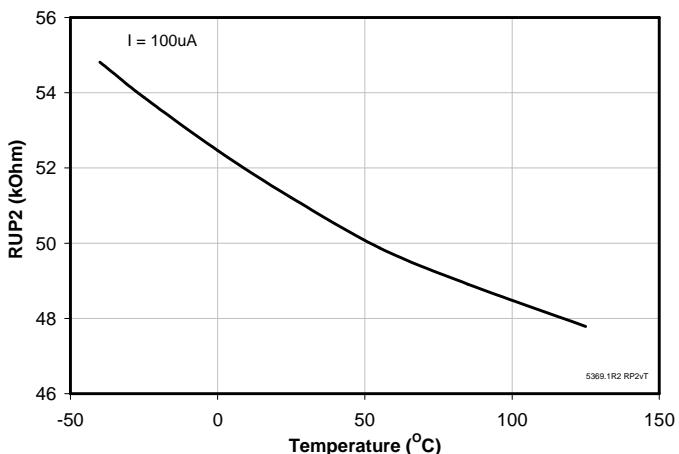
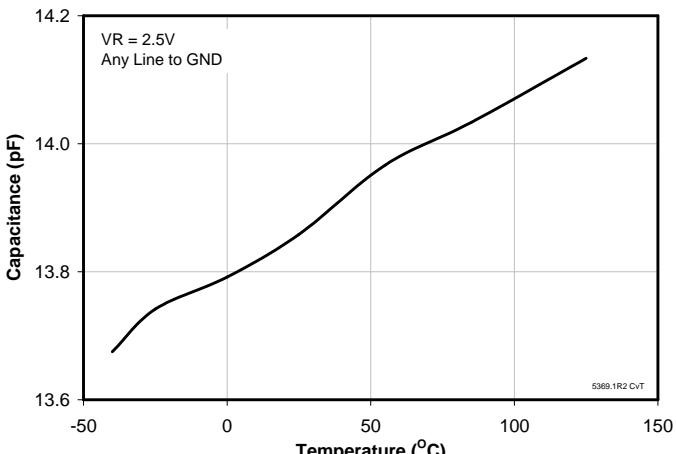
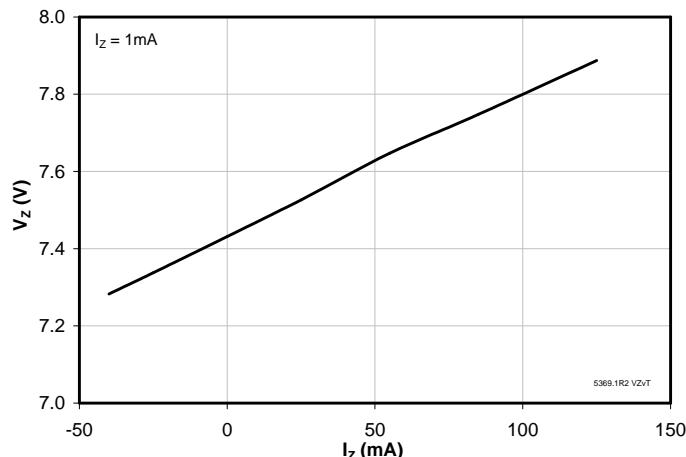
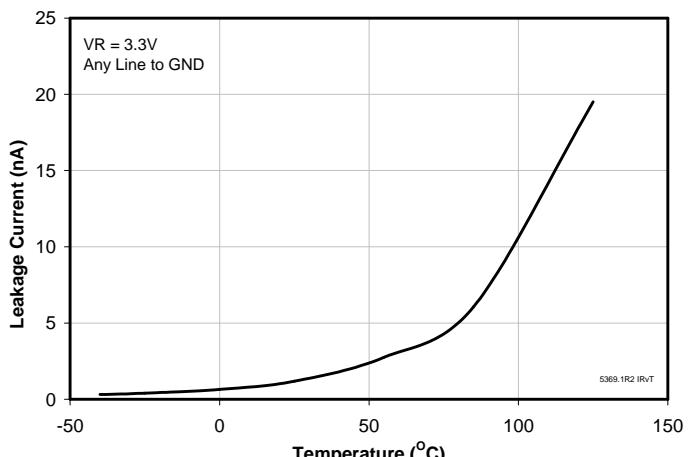
Electrical Characteristics (T=25°C unless otherwise specified)

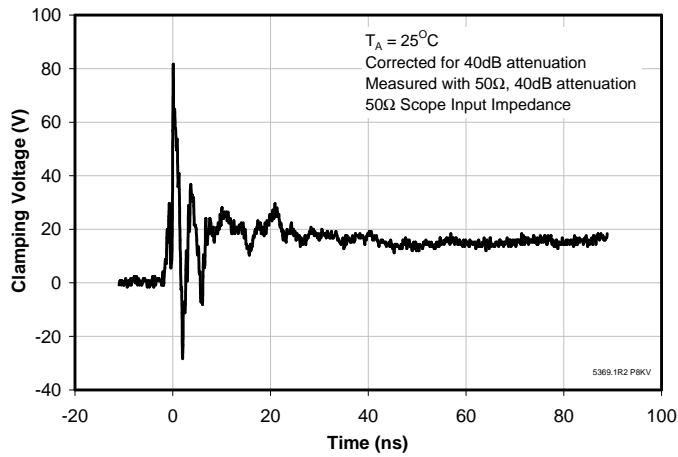
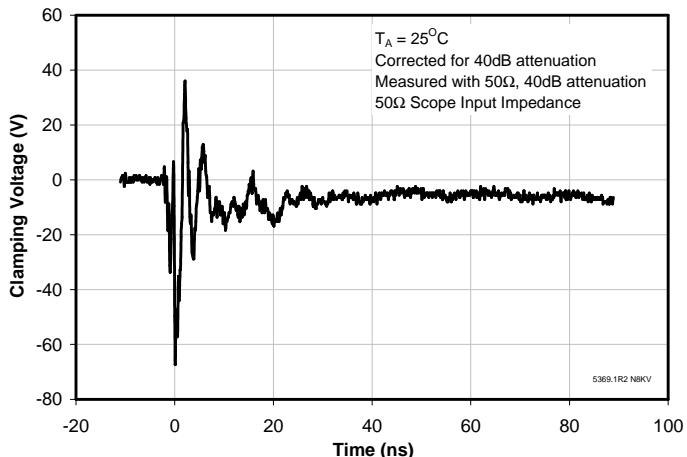
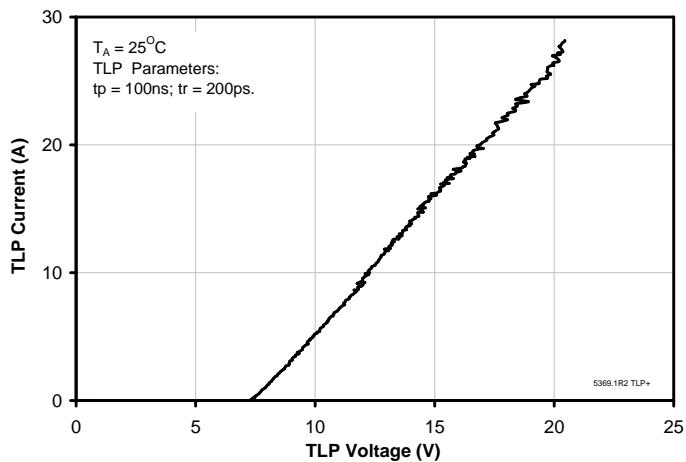
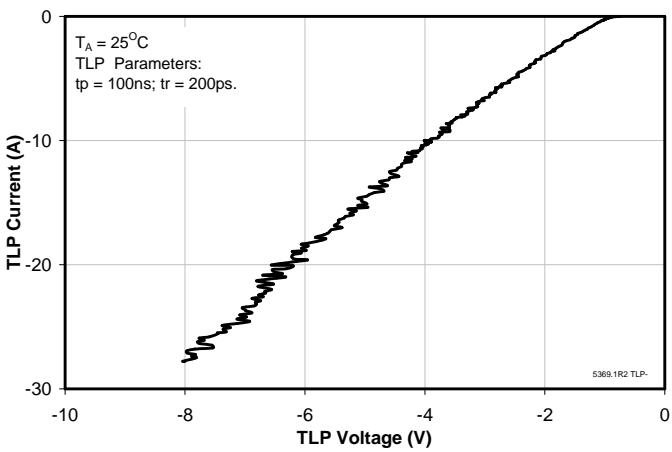
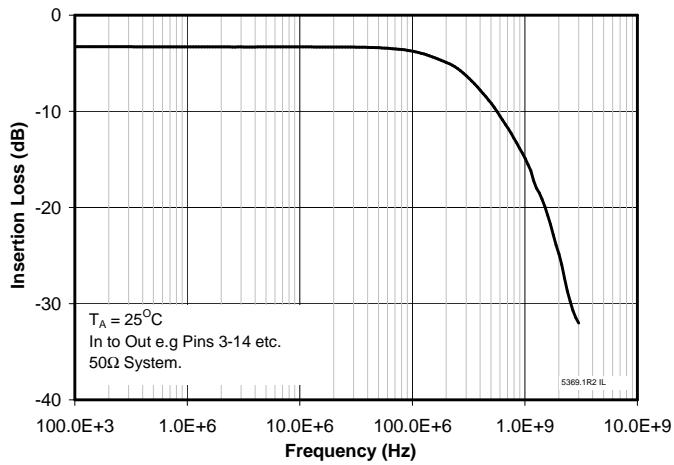
Parameter	Symbol	Conditions		Min.	Typ.	Max.	Units
TVS Reverse Stand-Off Voltage	V_{RWM}					5	V
TVS Reverse Breakdown Voltage	V_{BR}	$I_t = 1\text{mA}$	$T_A = 25^\circ\text{C}$	6	8	10	V
			$T_A = 125^\circ\text{C}$	6		10	
TVS Reverse Leakage Current	I_R	$V_{RWM} = 3.0\text{V}$	$T_A = 25^\circ\text{C}$			0.5	μA
			$T_A = 125^\circ\text{C}$			100	
Series Resistors	R	Each Line		38	45	52	Ohm
DAT Pull Up Resistor 1	R_{up1}			12	15	17	kOhm
DAT Pull Up Resistor 2	R_{up2}			42	50	58	kOhm
Total Capacitance	C_{in}	Input to Gnd, Each Line $V_R = 2.5\text{V}, f = 1\text{MHz}$	$T_A = 25^\circ\text{C}$	10	12	15	pF
			$T_A = 125^\circ\text{C}$		15	20	

PROTECTION PRODUCTS
Pin Identification and Configuration

Pin	Symbol	Identification
1, 16	DAT1	Data line #1 input/output with pull-up resistor
2, 15	DATO	Data line #0 Input/Output
3, 14	Clock	Clock line Input/Output
4	Rup1	15K Pull-up resistor from DAT1 & DAT2
5	Vdd	Power Supply ESD Protection
6, 11	CMD	Command Line Input/Output
7, 10	DAT3	Data line #3 input/output with pull-up resistor
8, 9	DAT2	Data line #2 input/output with pull-up resistor
12	Rup2	50K Pull-Up Resistor from DAT3
13	Rup3	VCC Circuit 3A
Center tab	GND	Ground connection


Schematics and Component Values


Typical Characteristics
Series Resistance vs. Temperature

Pull Up Resistance (Rup1) vs. Temperature

Pull Up Resistance (Rup2) vs. Temperature

Capacitance vs. Temperature

Reverse Breakdown Voltage vs. Temperature

Reverse Leakage Current vs. Temperature


Typical Characteristics
**Positive ESD Clamping
(8kV Contact per IEC 61000-4-2)**

**Negative ESD Clamping
(8kV Contact per IEC 61000-4-2)**

Positive TLP Plot

Negative TLP Plot

Insertion Loss S21 (Each Line)


Device Connection

The EClamp2410PQ is a microSD/T-Flash interface device designed for use in cell phones and other portable electronic devices. The EClamp2410PQ is comprised of series and pull up resistors required on the microSD interface. Each line also includes TVS diodes for ESD protection. The device may be configured for SD or SPI mode operation. In SD mode for example, the 15k Ohm pull up resistors (R_{UP} 1 and R_{UP} 3) are connected to VDD. In SPI mode pin 4 is not connected (R_{UP} 1) since these are reserved lines. The 50k Ohm pull up resistor is used for card detection or SPI mode selection during power up and is disconnected by the user during regular data transfer. The EClamp2410PQ is in a 16-pin SLP package. Electrical connection is made to the 16 pins located at the bottom of the device. The device has a flow through design for easy layout. Pin connections are noted in Figure 1. A center tab serves as the ground connection. Recommendations for the ground connection are given below.

Ground Connection Recommendation

Parasitic inductance present in the board layout will affect the filtering and ESD performance of the device. Ground loop inductance can be reduced by using multiple vias to make the connection to the ground plane. Figure 2 shows the recommended device layout. The ground pad vias have a diameter of 0.008 inches (0.20 mm) while the two external vias have a diameter of 0.010 inches (0.250mm). The internal vias are spaced approximately evenly from the center of the pad. The designer may choose to use more vias with a smaller diameter (such as 0.005 inches or 0.125mm) since changing the diameter of the via will result in little change in inductance.

Layout Guidelines for Optimum ESD Protection

Good circuit board layout is critical not only for signal integrity, but also for effective suppression of ESD induced transients. For optimum ESD protection, the following guidelines are recommended:

1: Place the device as close to the connector as possible. This practice restricts ESD coupling into adjacent traces and reduces parasitic inductance.

**Figure 1 - Pin Identification and Configuration
(Top Side View)**

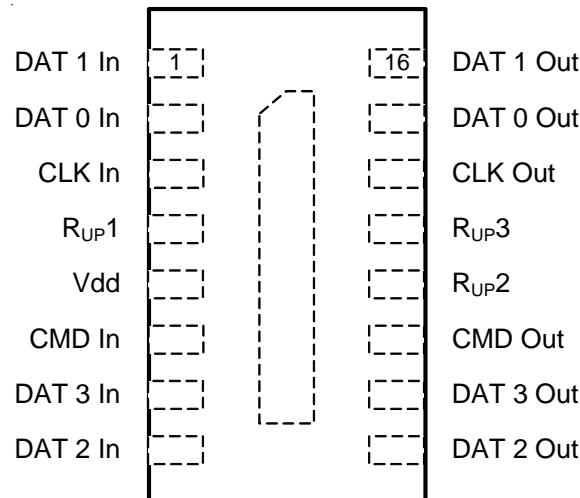
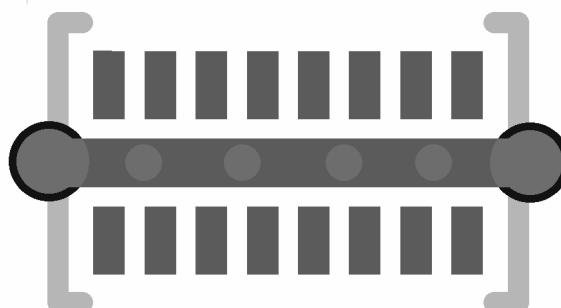


Figure 2 - Recommended Layout using Ground Vias



- 2: The ESD transient return path to ground should be kept as short as possible. Whenever possible, use multiple micro vias connected directly from the device ground pad to the ground plane.
- 3: Avoid running critical signals near board edges.

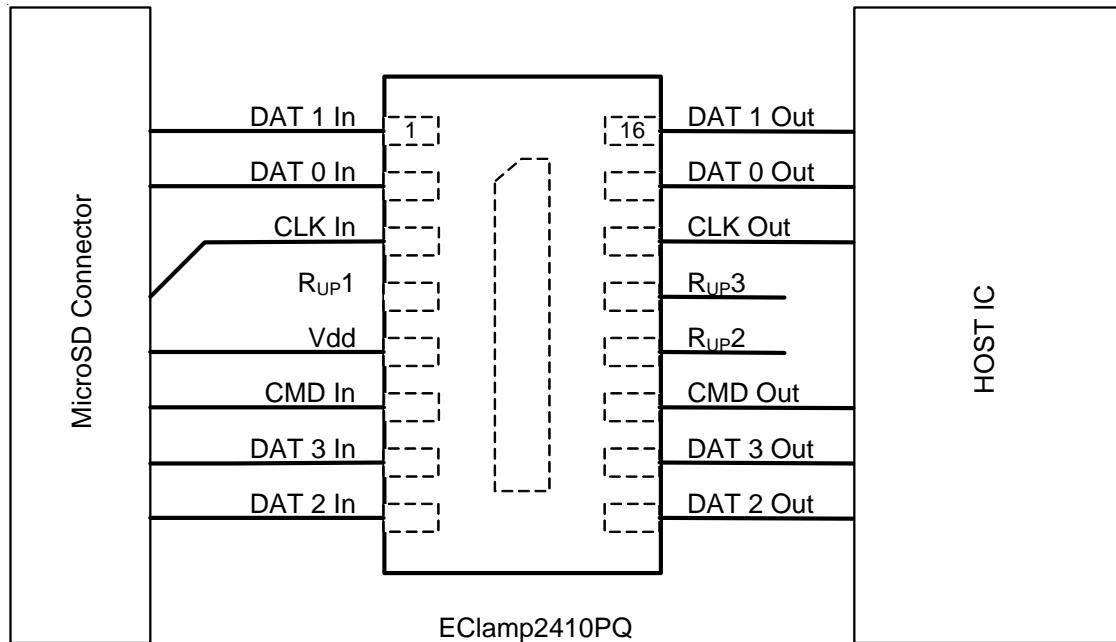
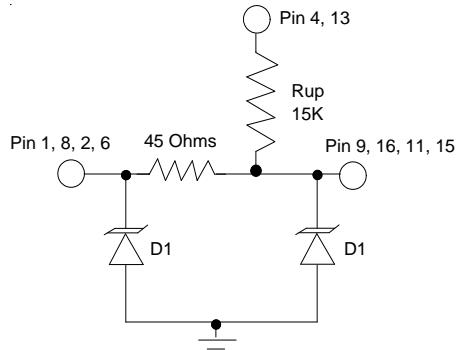
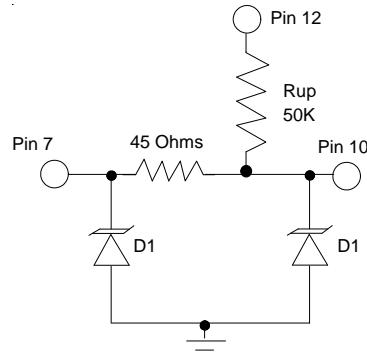
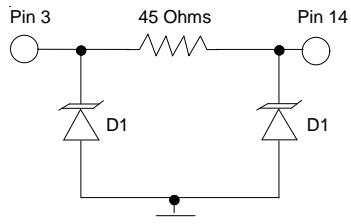

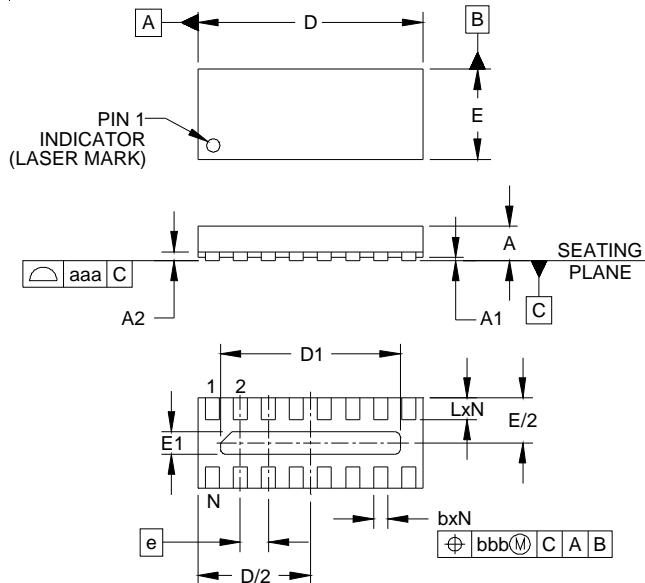


Figure 3 - MicroSD Protection

PROTECTION PRODUCTS
Applications Information - Spice Model

DAT1, DAT2, DAT0, CMD

DAT3

CLK

Vdd
EClamp2410PQ Spice Model

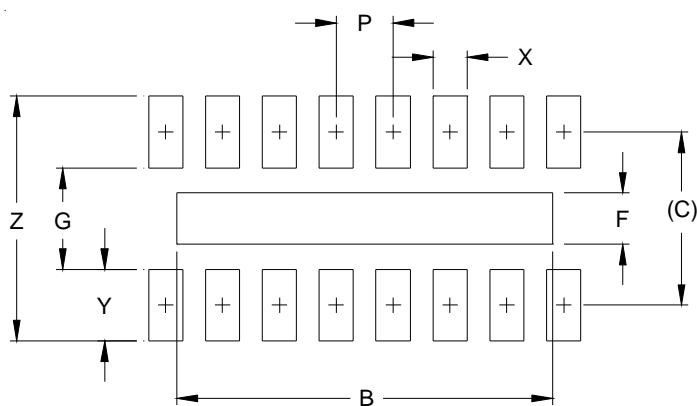
EClamp2410PQ Spice Parameters		
Parameter	Unit	D1 (TVS)
IS	Amp	2E-15
BV	Volt	7.46
VJ	Volt	0.777
RS	Ohm	1.00
IBV	Amp	1E-3
CJO	Farad	10E-12
TT	sec	2.541E-9
M	--	0.246
N	--	1.1
EG	eV	1.11



DIM	DIMENSIONS			INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX	MIN	NOM	MAX
A	.020	.023	.026	0.50	0.58	0.65			
A1	.000	.001	.002	0.00	0.003	0.005			
A2		(.005)				(0.13)			
b	.007	.010	.012	0.20	0.25	0.30			
D	.153	.157	.161	3.90	4.00	4.10			
D1	.122	.126	.130	3.10	3.20	3.30			
E	.059	.063	.067	1.50	1.60	1.70			
E1	.010	.016	.020	0.25	0.40	0.50			
e		.020	BSC			0.50 BSC			
L	.011	.013	.015	0.28	0.33	0.38			
N		16				16			
aaa		.003				0.08			
bbb		.004				0.10			

NOTES:

1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
2. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

Land Pattern - SLP4016P16


DIM	DIMENSIONS	
	INCHES	MILLIMETERS
B	.130	3.30
C	.060	1.52
F	.018	0.45
G	.035	0.89
P	.020	0.50
X	.012	0.30
Y	.025	0.63
Z	.085	2.15

NOTES:

1. THIS LAND PATTERN IS FOR REFERENCE PURPOSES ONLY.
CONSULT YOUR MANUFACTURING GROUP TO ENSURE YOUR
COMPANY'S MANUFACTURING GUIDELINES ARE MET.

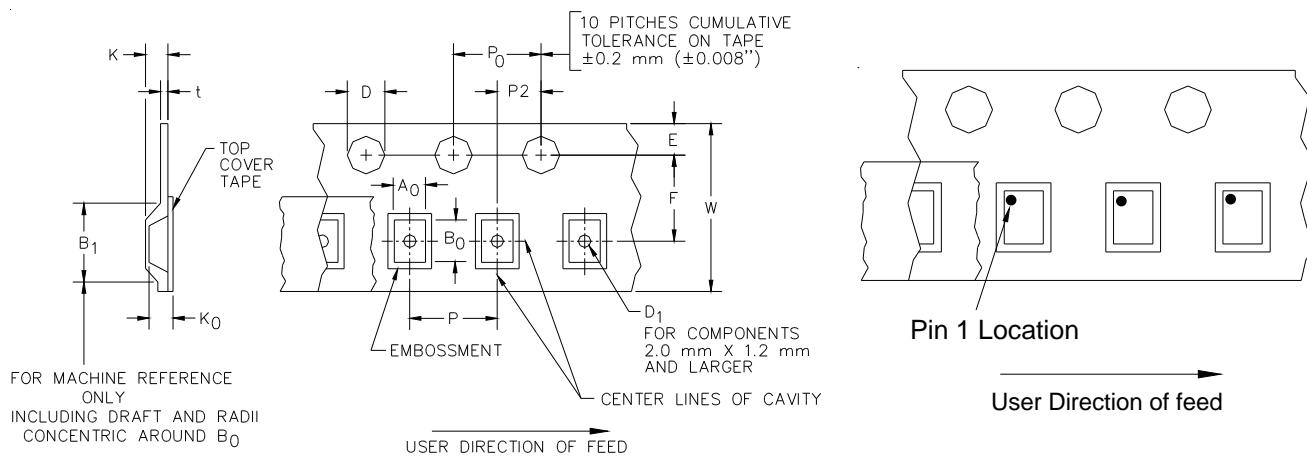
Marking

Pin 1 Indicator
Laser Mark
YX = Coded
Date Code


Ordering Information

Part Number	Qty per Reel	Reel Size
EClamp2410PQTCT	3000	7 Inch

EMIClamp and EClamp are marks of Semtech Corporation

Tape and Reel Specification

Device Orientation in Tape

A0	B0	K0
1.78 +/-0.10 mm	4.30 +/-0.10 mm	0.74 +/-0.10 mm

Tape Width	B, (Max)	D	D1	E	F	K (MAX)	P	P0	P2	T(MAX)	W
12 mm	8.2 mm (.476)	1.5 + 0.1 mm - 0.0 mm (0.59 +0.005 - .000)	1.0 mm ±0.05 (.039)	1.750±.10 mm (.069±.004)	5.5±0.05 mm (.217±.002)	4.5 mm (.177)	4.0±0.1 mm (.157±.00-4)	4.0±0.1 mm (.157±.00-4)	2.0±0.05mm (.079±.002)	0.4 mm (.016)	12.0 mm + 0.3 mm - 0.1 mm (.472±.012)

Contact Information

Semtech Corporation
Protection Products Division
200 Flynn Rd., Camarillo, CA 93012
Phone: (805)498-2111 FAX (805)498-3804