

# **Type: EE1916**


### **Product Description**

- 20.5 x 19.5mm Max.(L x W), 16.2mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements


#### **Feature**

- www.DataSheet41. Max. Operating frequency 300KHz.
  - · Ideally used in EL inverter, camera. Switching regulator.
  - RoHS Compliance

### **Dimensions (mm)**

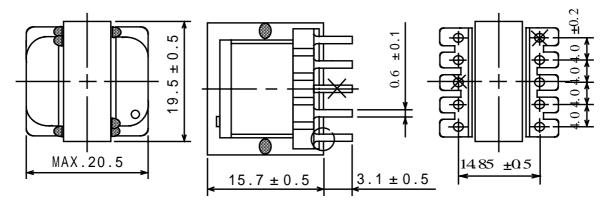

### **Schematics (Bottom)**



"S" is winding start

## **Specification**

| Sample No. | Inductance (4-5) | Impulse voltage | Hi-pot                        |
|------------|------------------|-----------------|-------------------------------|
|            | 1kHz/1V          | (7-10)          | (1,2,4,5,6-7,8,9,10)(50/60Hz) |
| 1309-T001  | 45μH ± 10%       | AC 2500Vp-p     | AC 800Vrms/2sec.              |