


DATA SHEET
Low Distortion GaAs Power FET

- **NON-HERMETIC LOW COST CERAMIC 70mil PACKAGE**
- **+24.0dBm TYPICAL OUTPUT POWER**
- **7.5 dB TYPICAL POWER GAIN AT 12GHz**
- **0.3 X 600 MICRON RECESSED “MUSHROOM” GATE**
- **Si₃N₄ PASSIVATION**
- **ADVANCED EPITAXIAL DOPING PROFILE PROVIDES HIGH POWER EFFICIENCY, LINEARITY AND RELIABILITY**

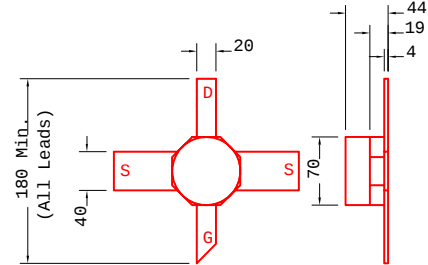

All Dimensions In mils.

ELECTRICAL CHARACTERISTICS (T_a = 25 °C)

SYMBOLS	PARAMETERS/TEST CONDITIONS	MIN	TYP	MAX	UNIT
P_{1dB}	Output Power at 1dB Compression V _{ds} =6V, I _{ds} =50% I _{dss} f=12GHz f=18GHz	22.0	24.0 24.0		dBm
G_{1dB}	Gain at 1dB Compression V _{ds} =6V, I _{ds} =50% I _{dss} f=12GHz f=18GHz	6.0	7.5 5.0		dB
PAE	Power Added Efficiency at 1dB Compression V _{ds} =6V, I _{ds} =50% I _{dss} f=12GHz		33		%
I_{dss}	Saturated Drain Current V _{ds} =3V, V _{gs} =0V	100	170	240	mA
G_m	Transconductance V _{ds} =3V, V _{gs} =0V	70	90		mS
V_p	Pinch-off Voltage V _{ds} =3V, I _{ds} =1.5mA		-2.0	-3.5	V
BV_{gd}	Drain Breakdown Voltage I _{gd} =1.0mA	-10	-15		V
BV_{gs}	Source Breakdown Voltage I _{gs} =1.0mA	-6	-14		V
R_{th}	Thermal Resistance		175*		°C/W

* Overall R_{th} depends on case mounting.

MAXIMUM RATINGS AT 25°C

SYMBOLS	PARAMETERS	ABSOLUTE ¹	CONTINUOUS ²
V_{ds}	Drain-Source Voltage	10V	6V
V_{gs}	Gate-Source Voltage	-6V	-4V
I_{ds}	Drain Current	I _{dss}	110mA
I_{gsf}	Forward Gate Current	15mA	2.5mA
P_{in}	Input Power	22dBm	@ 3dB Compression
T_{ch}	Channel Temperature	175°C	150 °C
T_{stg}	Storage Temperature	-65/175°C	-65/150 °C
P_t	Total Power Dissipation	780mW	650mW

Note: 1 Exceeding any of the above ratings may result in permanent damage.

2. Exceeding any of the above ratings may reduce MTTF below design goals.

Excelics Semiconductor, Inc., 2908 Scott Blvd., Santa Clara, CA 95054

Phone: (408) 970-8664 Fax: (408) 970-8998 Web Site: www.excelics.com

EFA060B-70

DATA SHEET

Low Distortion GaAs Power FET

S-PARAMETERS

6V, 1/2 Idss

FREQ (GHz)	--- S11 ---		--- S21 ---		--- S12 ---		--- S22 ---	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1.0	0.959	-36.8	5.607	150.2	0.021	69.7	0.673	-15.7
2.0	0.881	-70.5	4.945	123.1	0.036	52.6	0.632	-31.5
3.0	0.810	-99.4	4.231	100.1	0.044	41.1	0.600	-44.6
4.0	0.753	-126.7	3.718	79.4	0.046	32.4	0.577	-54.8
5.0	0.712	-151.3	3.295	60.6	0.048	28.1	0.546	-64.9
6.0	0.687	-169.6	2.954	43.8	0.050	27.6	0.516	-78.2
7.0	0.669	170.6	2.667	27.3	0.052	27.4	0.508	-90.3
8.0	0.660	152.5	2.440	11.7	0.055	30.2	0.490	-101.7
9.0	0.676	127.8	2.207	-5.2	0.064	29.7	0.490	-111.1
10.0	0.701	108.4	2.002	-21.9	0.074	23.8	0.482	-126.3
11.0	0.712	95.0	1.914	-38.1	0.087	16.1	0.478	-147.5
12.0	0.734	79.3	1.812	-55.4	0.100	6.7	0.485	-168.1
13.0	0.786	64.1	1.623	-71.5	0.107	-4.6	0.477	173.7
14.0	0.814	50.9	1.436	-86.6	0.108	-14.9	0.486	155.8
15.0	0.822	36.8	1.325	-104.7	0.113	-29.1	0.532	132.1
16.0	0.827	21.3	1.192	-124.5	0.113	-45.2	0.560	107.3
17.0	0.815	10.9	1.036	-138.3	0.111	-52.3	0.563	92.5
18.0	0.824	2.0	0.978	-151.3	0.119	-69.9	0.622	79.4
19.0	0.842	-12.9	0.870	-168.6	0.103	-84.5	0.654	62.6
20.0	0.865	-25.0	0.793	174.4	0.098	-99.1	0.709	45.8
21.0	0.837	-34.9	0.737	158.8	0.095	-113.3	0.716	32.5
22.0	0.803	-48.2	0.703	144.6	0.099	-127.5	0.707	22.7
23.0	0.828	-65.6	0.636	126.3	0.099	-145.0	0.692	3.5
24.0	0.832	-79.0	0.563	107.3	0.104	-163.0	0.696	-18.6
25.0	0.762	-97.6	0.529	90.4	0.119	-179.7	0.727	-31.7
26.0	0.779	-120.5	0.523	72.5	0.149	163.3	0.710	-48.8