




• **EFM-250**




**FEATURES:**

- SMT inside
- Small size
- Sealed type for wave soldering and washable request
- Low current consumption

**DIMENSIONS: (Unit: mm)**

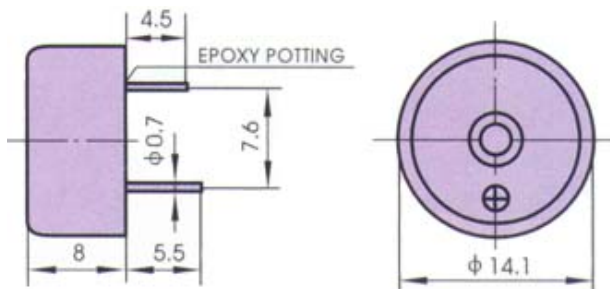

**CHARACTERISTICS:**

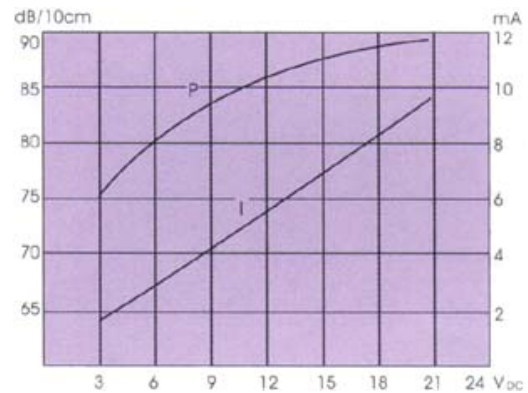

**Note:** EFM-250 is adopted with epoxy potting at the bottom.

**ELECTRICAL SPECIFICATIONS :**

<b>Model No.</b>	<b>EFM-250</b>
Min. Sound Pressure Level (dB)	85 /12V <sub>DC</sub> /10cm
Rated Voltage (V <sub>DC</sub> )	12
Operating Voltage (V <sub>DC</sub> )	6 ~ 16
Max. Consumption (mA)	8 /12V <sub>DC</sub>
Oscillating Frequency (kHz)	4.0 ± 0.5
Tone Nature	Continuous
Operating Temperature (°C)	-20 ~ +60
Weight (g)	1.3
Case Material/Colour	PC/Black

**PACKING INFORMATION :**

Packing :	5000 pcs per export carton
Carton Size :	47 X 30.5 X 33 cm
G. Weight :	8 kgs
N. Weight :	6.5 kgs