

**SURFACE MOUNT GLASS PASSIVATED
SUPER FAST SILICON RECTIFIER
VOLTAGE RANGE 50 to 600 Volts CURRENT 1.0 Ampere**

FEATURES


- * Glass passivated device
- * Ideal for surface mounted applications
- * Low leakage current
- * Metallurgically bonded construction
- * Mounting position: Any

MECHANICAL DATA

- * Epoxy : Device has UL flammability classification 94V-0

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Resistive or inductive load.

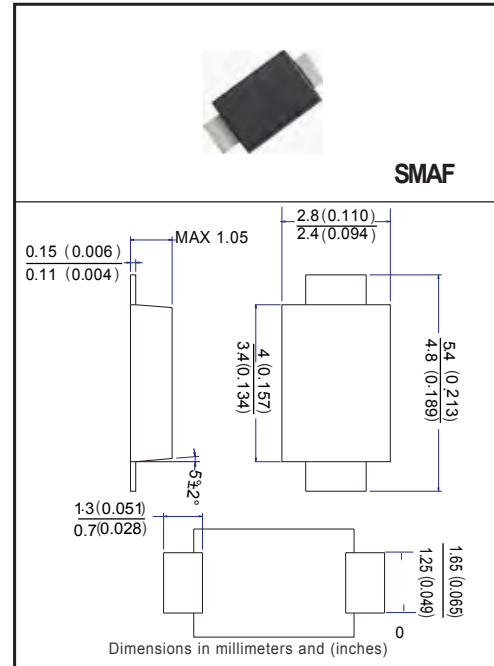

MAXIMUM RATINGS (@ TA=25 °C unless otherwise noted)

RATINGS	SYMBOL	EFM101F	EFM102F	EFM103F	EFM104F	EFM105F	EFM106F	EFM107F	UNITS	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	Volts	
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	420	Volts	
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	Volts	
Maximum Average Forward Rectified Current at T _A = 55°C	I _O	1.0							Amps	
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	30							Amps	
Typical Current Square Time	I ² T	3.7							A ² S	
Typical Thermal Resistance (Note 4)	R _{θJA}	85							°C/W	
	R _{θJL}	35								
Typical Junction Capacitance (Note 2)	C _J	15				10				pF
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to + 150							°C	

ELECTRICAL CHARACTERISTICS (@TA=25 °C unless otherwise noted)

CHARACTERISTICS	SYMBOL	EFM101F	EFM102F	EFM103F	EFM104F	EFM105F	EFM106F	EFM107F	UNITS
Maximum Instantaneous Forward Voltage at 1.0ADC	V _F	0.95				1.25	1.50		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	@T _A = 25°C							μAmps
		@T _A = 100°C							
Maximum Reverse Recovery Time (Note 1)	t _{rr}	35						50	nSec

- NOTES : 1. Reverse Recovery Test Conditions: I_F = 0.5A, I_R = -1.0A, I_{RR} = -0.25A
 2. Measured at 1 MHz and applied reverse voltage of 4.0 volts
 3. "Fully ROHS compliant", "100% Sn plating (Pb-free)".
 4. Thermal Resistance : Mounted on PCB.

RATING AND CHARACTERISTICS CURVES (EFM101F THRU EFM107F)

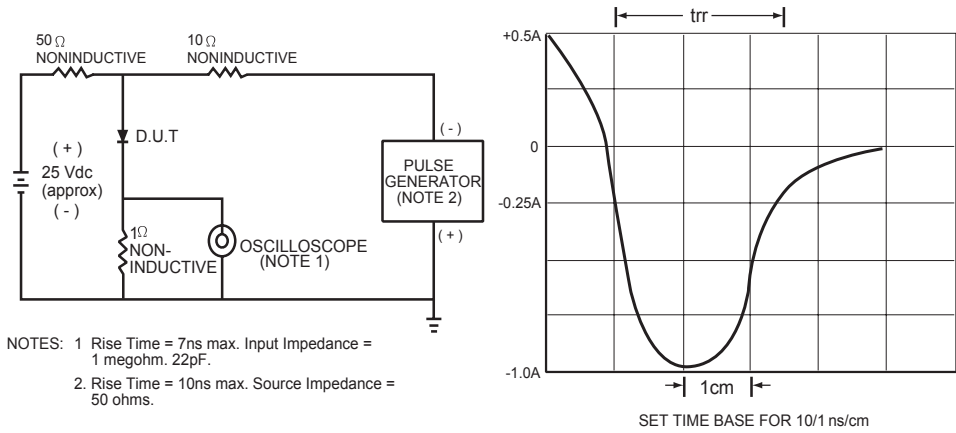


FIG.1 TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

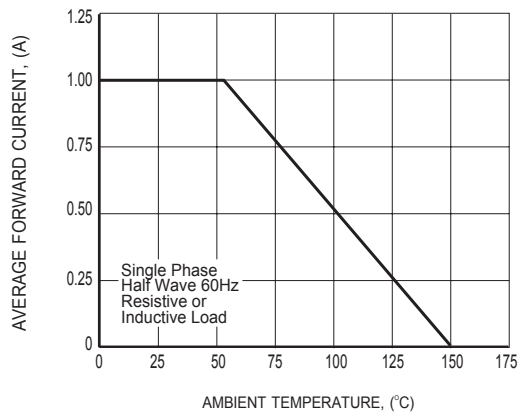


FIG.2 TYPICAL FORWARD CURRENT DERATING CURVE

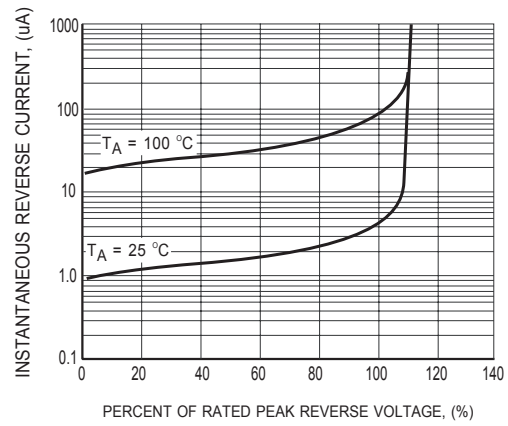


FIG.3 TYPICAL REVERSE CHARACTERISTICS

RATING AND CHARACTERISTICS CURVES (EFM101F THRU EFM107F)

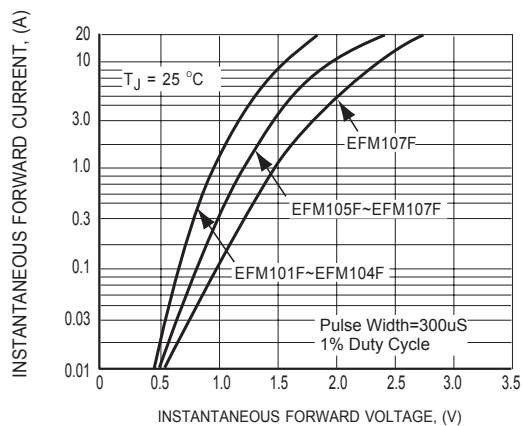


FIG.4 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

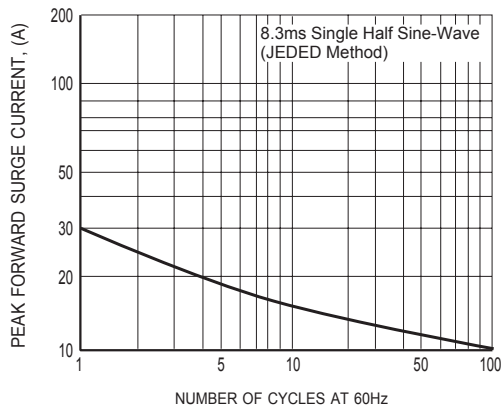


FIG.5 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


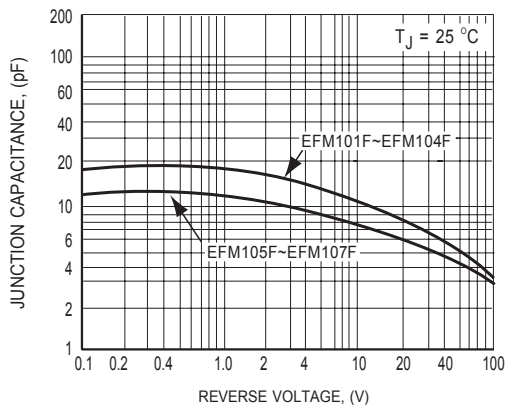


FIG.6 TYPICAL JUNCTION CAPACITANCE

1. Internal Circuit



2. Marking on the body

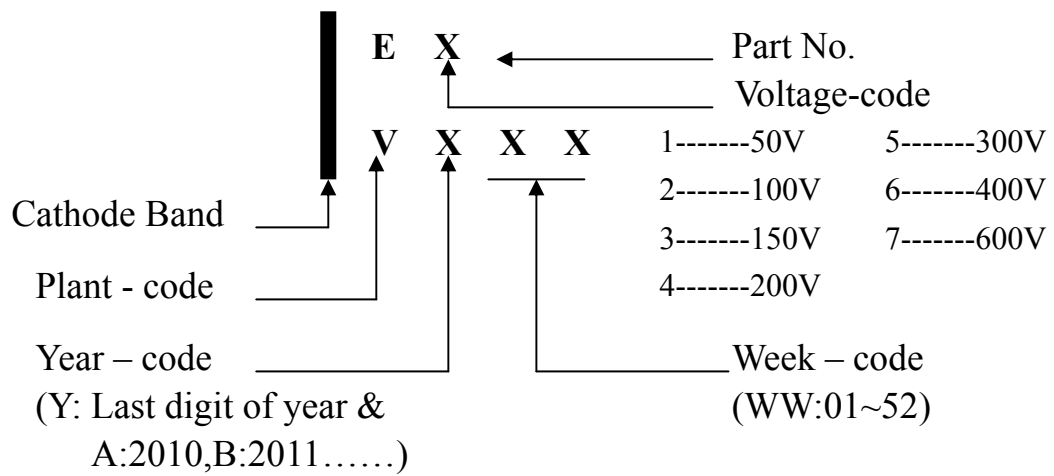

REEL TAPING SPECIFICATIONS FOR SURFACE MOUNT DEVICES-FLAT MELF (SMAF)

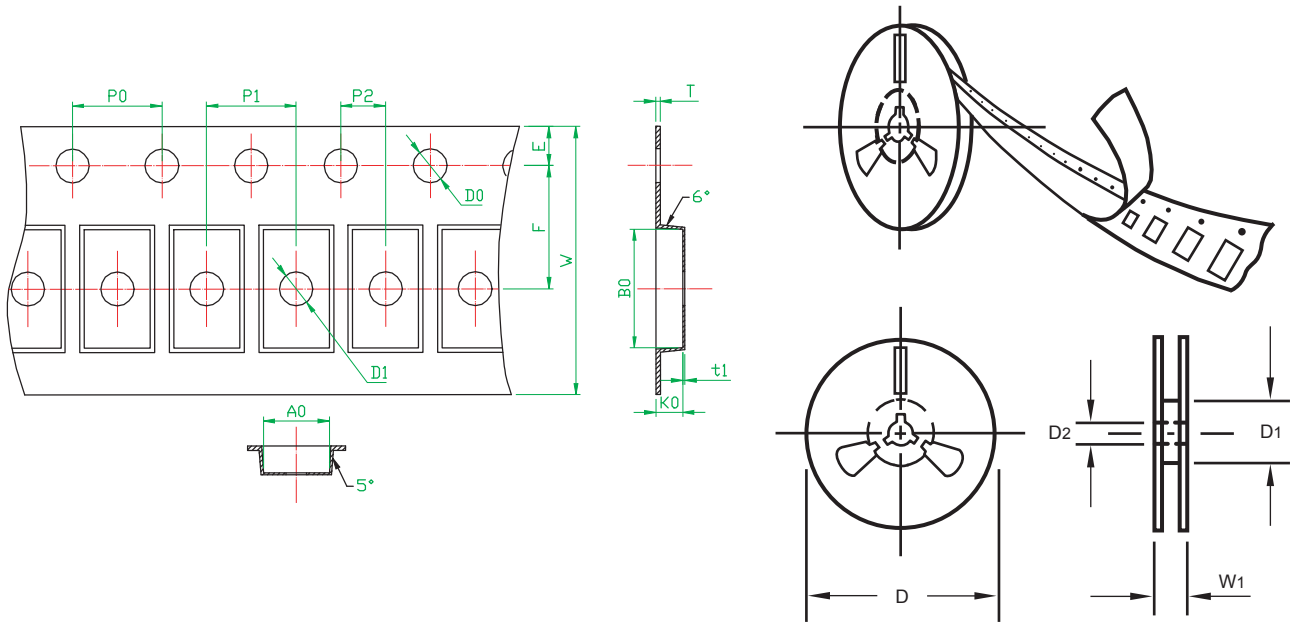


Fig.: Configuration of FLAT MELF TAPING
(SMAF)

ITEM	SYMBOL	SMAF mm(inch)
Carrier width	A	2.9 ± 0.10 (0.114 \pm 0.004)
Carrier length	B	5.35 ± 0.10 (0.211 \pm 0.004)
Carrier depth	C	1.15 ± 0.10 (0.045 \pm 0.004)
Sprocket hole	D0	1.55 ± 0.05 (0.061 \pm 0.002)
Reel outside diameter	D	178 ± 2.0 (7.0 \pm 0.079)
Reel inner diameter	D1	50 Min.
Feed hole diameter	D2	13 ± 0.5 (0.512 \pm 0.020)
Sprocket hole position	E	1.75 ± 0.1 (0.069 \pm 0.004)
Punch hole position	F	5.50 ± 0.05 (0.217 \pm 0.002)
Punch hole pitch	P	4.0 ± 0.1 (0.157 \pm 0.004)
Sprocket hole pitch	P0	4.0 ± 0.1 (0.157 \pm 0.004)
Embossment center	P1	2.0 ± 0.05 (0.079 \pm 0.002)
Total tape thickness	T	0.23 ± 0.02 (0.009 \pm 0.001)
Tape width	W	$12.0 \pm_{0.1}^{0.3}$ (0.472 $\pm_{0.004}^{0.012}$)
Reel width	W1	16.8 ± 2.0 (0.661 \pm 0.079)

Note: 1.Devices are packed in accordance with EIA standard RS-481-D and specification given above.
2.Available on 7 inch (1500 ct.) or 13 inch (5000 ct.) diameter reels.

PACKAGING OF DIODE AND BRIDGE RECTIFIERS

REEL PACK

PACKAGE	PACKING CODE	EA PER REEL	EA PER INNER BOX	COMPONENT SPACE (mm)	TAPE SPACE (mm)	REEL DIA (mm)	CARTON SIZE (mm)	EA PER CARTON	GROSS WEIGHT(Kg)
SMAF	-T	3,000	12,000	---	---	178	390*205*310	96,000	---
SMAF	-W	10,000	20,000	---	---	330	360*355*360	160,000	---

DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.