




2.0 AMP SUPER FAST RECTIFIER

DO-214AA/SMB PACKAGE

FEATURES

- * Ideal for surface mounted applications
- * Low leakage current
- * Metallurgically bonded construction
- * RoHS product for packing code suffix "G"
- Halogen free product for packing code suffix "H"

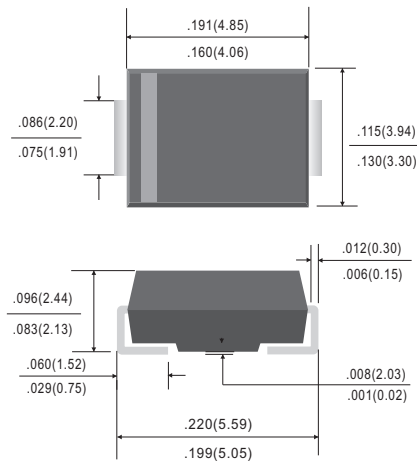

MECHANICAL DATA

- * Case: DO-214AA/SMB Molded plastic
- * Epoxy: UL 94V-O rate flame retardant
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half wave, 60Hz, resistive of inductive load.
 For capacitive load, derate current by 20%

RATINGS	SYMBOL	EFM201	EFM202	EFM203	EFM204	EFM205	EFM206	EFM208	UNIT
Marking Code		2E1	2E2	2E3	2E4	2E5	2E6	2E8	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	Volts
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	420	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	Volts
Maximum Average Forward Current at T _A = 55°C	I _O	2.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	50							Amps
Typical Thermal Resistance	R _{θJA}	85							°C/W
Typical Junction Capacitance (Note 2)	C _J	30				20			pF
Operating Temperature Range	T _J	-55 to +175							°C
Storage Temperature Range	T _{STG}	-65 to +175							°C


CHARACTERISTICS	SYMBOL	EFM201	EFM202	EFM203	EFM204	EFM205	EFM206	EFM208	UNIT	
Maximum Forward Voltage at 2.0A DC(Note 3)	V _F	0.95			1.25		1.75		Volts	
Maximum Average Reverse Current at Rated DC Blocking Voltage	I _R	@TA=25°C 5.0			@TA=100°C 150				μAmps	
Maximum Reverse Recovery Time (Note 1)	T _{rr}	35								nS

NOTES :1. Test Conditions: I_F = 0.5A, I_R = -1.0A, I_{RR} = -0.25A
 2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

2.0 AMP SUPER FAST RECTIFIER

DO-214AA/SMB PACKAGE

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

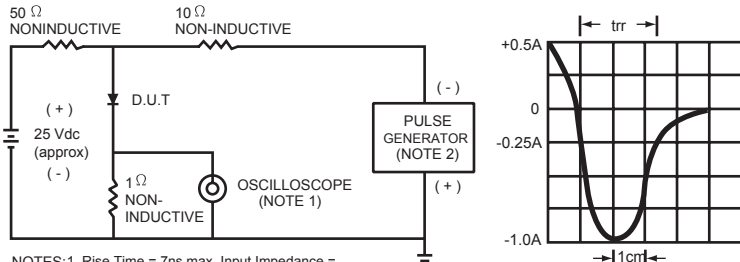

NOTES: 1. Rise Time = 7ns max. Input Impedance = 1 megohm. 22 pF.
2. Rise Time = 10ns max. Source Impedance = 50 ohms.

FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

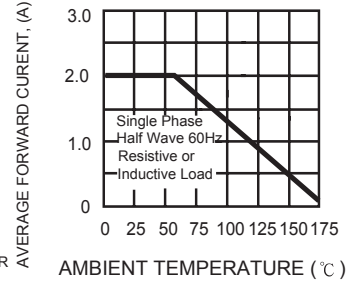


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

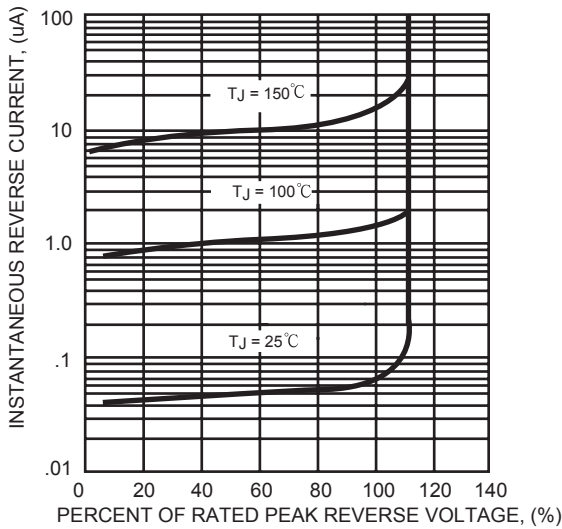


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

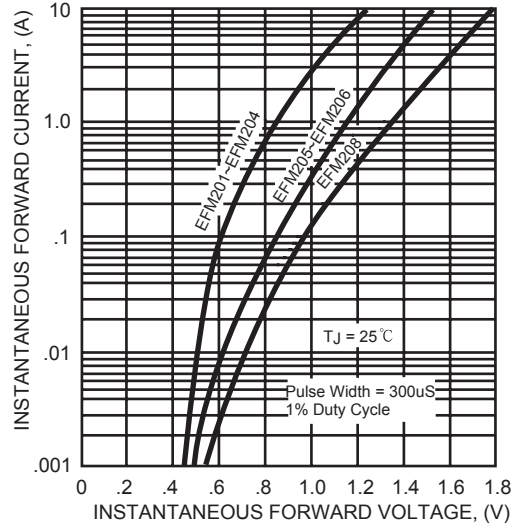


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

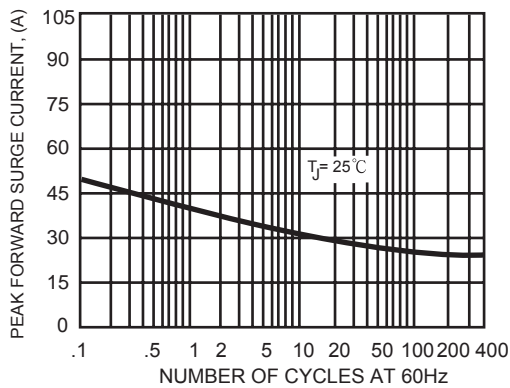


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

