

# SPECIFICATION

For

## EG2401S-ER

This specification consists of two documents as follows.

- |                     |              |
|---------------------|--------------|
| 1.LCD Specification | SC-010006210 |
| 2.LCD QA Standard   | M4-00100     |

|                        |                                                                                                                                                                                       |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Customer's Approval    |                                                                                                                                                                                       |
| Date _____<br>By _____ | Date Feb. 4 '93<br>Presented by<br><br><i>Y. Katayama</i> <i>y. Tokas</i> <i>M. Nakamura</i><br>Y. Katayama GM QA dep.<br><br>SEIKO EPSON CORP.<br>LCD DIV.<br>Quality assurance Dep. |

Spec Code

S C - 010006210

S P E C I F I C A T I O N SE G 2 4 0 1 S -

| Item No | I t e m                    | S h e e t C o d e    |
|---------|----------------------------|----------------------|
| 1       | Basic Specification        | 1 1 - 010006210      |
|         |                            | 1 2 - 25606401       |
|         | Outline Dimensions         | 1 3 - 14000000       |
|         |                            | SD - 0 1 0 1 2 9 - D |
| 2       | Absolute Maximum Ratings   | 2 1 - C0000016       |
| 3       | Electrical Characteristics | 3 1 - 010006210      |
|         |                            | 3 2 - B0000000       |
|         |                            | 3 3 - B0000000       |
|         |                            | 3 4 - 25606401       |
|         |                            | 3 5 - 25606401       |
| 4       | Optical Characteristics    | 4 1 - SJ648L06       |
|         |                            | 4 2 - JE000000       |
|         |                            | 4 3 - P0000000       |
|         |                            | 4 4 - P0000000       |
| 5       | Reliability                | 5 1 - S0000001       |
|         |                            | 5 2 - S0000000       |
| 6       | Package Specifications     | 6 1 - 010006210      |
|         |                            | 6 2 - 010006210      |
| 7       | Others                     | A 4 - S0000000-A.    |
| 8       | Handling Precautions       | B - PEMN0000-A(1~4)  |
| 9       | Revision Sheet             | 0 0 - 010006210      |

S E I K O E P S O N C O R P O R A T I O N  
L C D D I V I S I O N

LD DESIGN Dep.

*K. Uchihashi*  
*Jns* *S. Koyama* *M. Miyashita*

## 1. Basic Specifications

### 1-1 Display Specifications

(1) STN Mode Positive Display type Transflective Model

(2) Display Color

Display Color : Display Data"1" : Dark Blue

Background Color : Display Data"0" : Gray

(3) Viewing Angle : 6 O'clock direction

(4) Driving Duty : 1/64 Duty

(5) Backlight : EL (Yellow Green)

\*1) Color tone is slightly changed by temperature and driving voltage.

### 1-2 Mechanical Specifications

(1) Outline Dimensions : Refer to attached Outline Dimensions figure SD-010129-D

(2) Dot Matrix : 256 dots × 64 dots

(3) Dot Size : 0.48 (W) × 0.48 (H) (mm)

(4) Dot Pitch : 0.52 (W) × 0.52 (H) (mm)


(5) Weight : 210 g (Typ.)

SEIKO EPSON CORPORATION

Sheet  
Code

11-010006210

1-3 Block Diagram

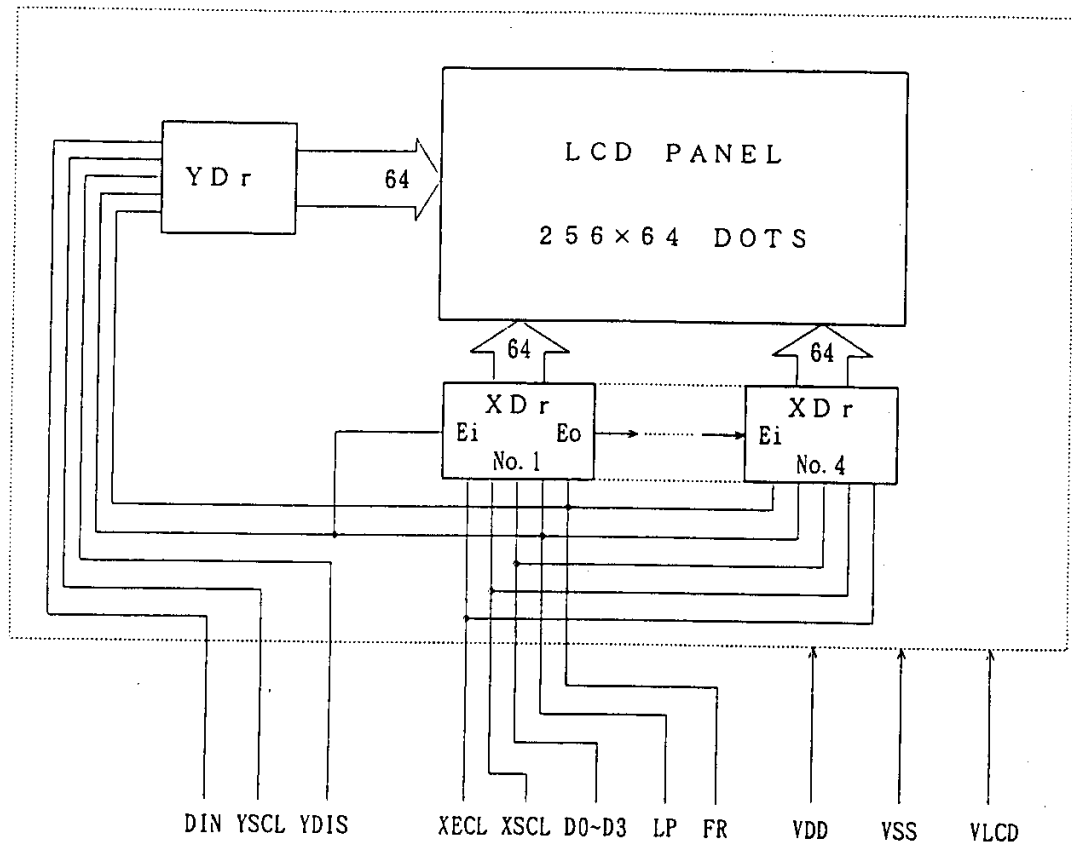

SEIKO EPSON CORPORATION

Sheet  
Code

12-25606401

# 1-4 Terminal Functions

| Pin No.         | Symbol          | F u n c t i o n                                        |
|-----------------|-----------------|--------------------------------------------------------|
| 1               | V D D           | Power supply for logic                                 |
| 2               | V S S           | Ground                                                 |
| 3               | V L C D         | Power supply for LCD                                   |
| 4               | L P             | Latch pulse signal input                               |
| 5               | F R             | Switch signal input to convert LC drive waveform to AC |
| 6               | Y D I S         | Display control (Display off "0", Normal state "1")    |
| 7               | Y S C L         | Row scan shift clock input                             |
| 8               | D I N           | Row scan start-up pulse input                          |
| 9               | X S C L         | Display data shift clock input                         |
| 1 0             | X E C L         | Enable transition clock input                          |
| 1 1<br>~<br>1 4 | D 0<br>~<br>D 3 | Display data pulse input                               |



## 2. Absolute Maximum Ratings

| Item                        | Symbol     | Standard Value          | Unit | Condition      |
|-----------------------------|------------|-------------------------|------|----------------|
| Power supply Voltage        | VDD - VSS  | 0 ~ +7.0                | V    |                |
| LCD Driving Voltage         | VDD - VLCD | 0 ~ +25.0               |      |                |
| Input Voltage               | VIN        | $VSS \leq VIN \leq VDD$ |      |                |
| EL Voltage                  | VEL        | 150                     | Vrms |                |
| EL Frequency                | fEL        | 0.8                     | KHz  |                |
| Operating Temperature Range | TOP        | 0 ~ +50                 | °C   | Not to be dewy |
| Storage Temperature Range   | TST        | -20 ~ +60               |      |                |

\*1) Relation between Store Conditions and Permissible Time for EL Backlight

| Store Conditions | Permissible Time |
|------------------|------------------|
| 60°C, 90%RH      | 60H              |
| 50°C, 90%RH      | 200H             |
| 40°C, 90%RH      | 450H             |
| 30°C, 90%RH      | 750H             |
| 20°C, 90%RH      | 1400H            |

### 3. Electrical Characteristics

#### 3-1 DC Characteristics

##### (1) Module DC Characteristics

$T_a = 0 \sim 50^\circ\text{C}$ ,  $V_{DD} = 5\text{V} \pm 5\%$

| I t e m                  | Symbol   | Standard Value                       |       |        | Unit | Applicable Terminal                                | Condition |
|--------------------------|----------|--------------------------------------|-------|--------|------|----------------------------------------------------|-----------|
|                          |          | M I N                                | T Y P | M A X  |      |                                                    |           |
| Power Supply Voltage     | VDD      | 4.75                                 | 5.0   | 5.25   | V    | VDD                                                |           |
|                          | VDD-VLCD | Depending on Optical Characteristics |       |        |      | VLCD                                               |           |
| "0" Input Voltage        | VIL      | 0                                    | —     | 0.2VDD | V    | LP, FR<br>YDIS, YSCL<br>DIN, XSCL<br>XECL<br>D0~D3 |           |
| "1" Input Voltage        | VIH      | 0.8VDD                               | —     | VDD    |      |                                                    |           |
| I/O Leak Current         | I L      | —                                    | —     | 50     | μ A  |                                                    |           |
| Power Supply Current     | I DD     | —                                    | —     | 4      | m A  | VDD                                                | * 1       |
| LCD Power Supply Current | I LCD    | —                                    | —     | 3      | m A  | VLCD                                               |           |

\*1) VLCD=-8.6V, Frame Frequency 75Hz

##### (2) Backlight DC Characteristics

$T_a = 20^\circ\text{C}$

| Item                   | Symbol | Standard Value |     |      | Unit | Applicable Terminal | Condition |
|------------------------|--------|----------------|-----|------|------|---------------------|-----------|
|                        |        | MIN            | TYP | MAX  |      |                     |           |
| EL Voltage             | VEL    | —              | 100 | —    | Vrms |                     |           |
| EL Frequency           | fEL    | —              | 400 | —    | Hz   |                     |           |
| EL Current             | IEL    | —              | 8.2 | 10.6 | mA   |                     | * 2       |
| INVERTER Input Current | IIN    | —              | 43  | 49   | mA   |                     | * 3       |

\*2) Operation at AC100Vrms, 400Hz

The life of half brightness is 1,500 Hours. (20°C, 60%RH)

\*3) Operation with suitable INVERTER(NEL-D32-49)

The life of half brightness is 3,000 Hours. (20°C, 60%RH)

SEIKO EPSON CORPORATION

Sheet  
Code

31-010006210




# 3-2 AC Characteristics

| I t e m                      | Symbol | Standard Value |       |       | Unit | Condition    |
|------------------------------|--------|----------------|-------|-------|------|--------------|
|                              |        | M I N          | T Y P | M A X |      |              |
| Allowable FR Delay Time      | TFD    | - 5 0 0        | 0     | 5 0 0 | nsec | VDD =<br>5 V |
| LP, YSCL Period              | TLC    | -              | 2 2 0 | -     | μsec |              |
| XSCL Period                  | TXSC   | 1 6 6          | -     | -     | nsec |              |
| YSCL " L " Time              | TSL    | 1 8 0          | -     | -     | nsec |              |
| YSCL Pulse Width             | WYSC   | 1 8 0          | -     | -     | nsec |              |
| LP " L " Time                | TLL    | 2 2 0          | -     | -     | nsec |              |
| LP Pulse Widhte              | WLP    | 2 5 0          | -     | -     | nsec |              |
| XECL " L " Time              | TEL    | 1 0 0          | -     | -     | nsec |              |
| XECL Pulse Width             | WECL   | 1 0 0          | -     | -     | nsec |              |
| XSCL " L " Time              | TXSL   | 6 3            | -     | -     | nsec |              |
| XSCL Pulse Width             | WXSC   | 6 3            | -     | -     | nsec |              |
| XECL Setup Time              | TL1    | 1 4 0          | -     | -     | nsec |              |
| XECL Hold Time               | TL2    | 5 0            | -     | -     | nsec |              |
| Latch Timing                 | TLT1   | 1 2 5          | -     | -     | nsec |              |
|                              | TLT2   | 0              | -     | -     |      |              |
|                              | TLS1   | 1 0 0          | -     | -     |      |              |
|                              | TLS2   | 0              | -     | -     |      |              |
| XECL Switching Time (" H " ) | TS1    | 7 0            | -     | -     | nsec |              |
| XECL Switching Time (" L " ) | TS2    | - 1 0          | -     | -     | nsec |              |
| Data Setup Time              | TDS    | 5 0            | -     | -     | nsec |              |
| Data Hold Time               | TDH    | 3 0            | -     | -     | nsec |              |
| D I N Setup Time             | TD I S | 1 0 0          | -     | -     | nsec |              |
| D I N Hold Time              | TD I H | 3 0            | -     | -     | nsec |              |
| Input Wave Form Rise Time    | t r    | -              | -     | ※ 1   | nsec |              |
| Input Wave Form Fall Time    | t f    | -              | -     | ※ 1   | nsec |              |


\*1) (TXSC-TXSL-WXSC)/2 with 50nsec max.

3-3 Timing Chart 1

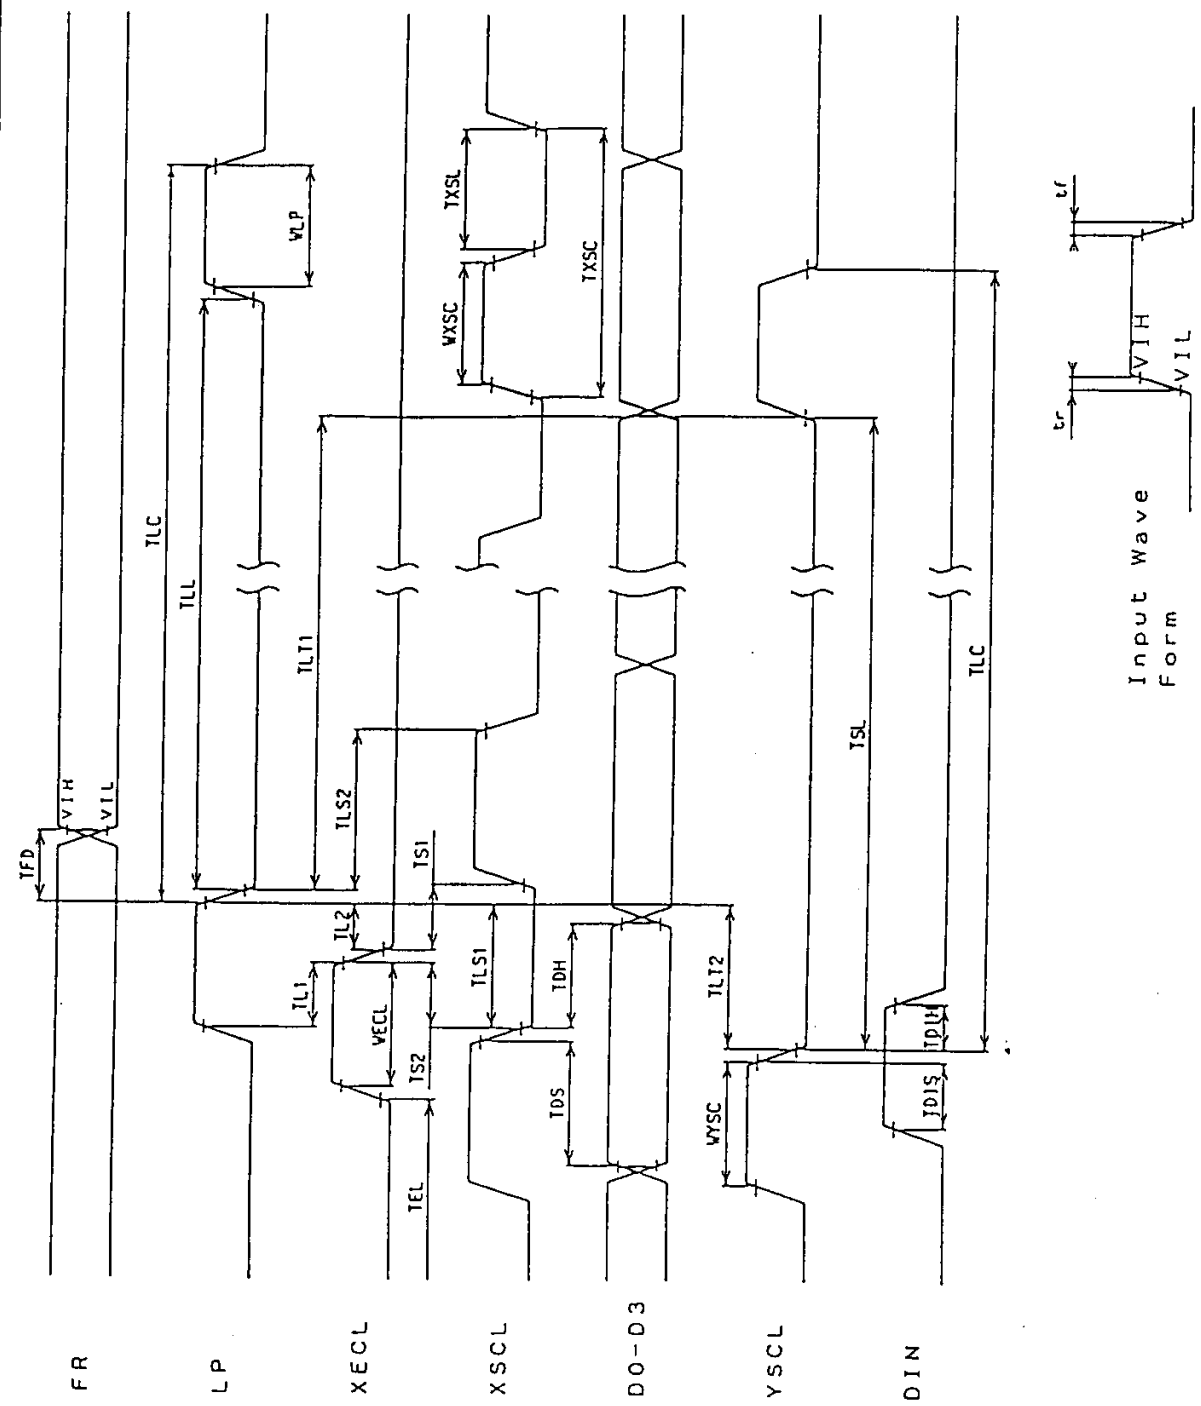

Input Wave Form

3-4 Timing Chart 2

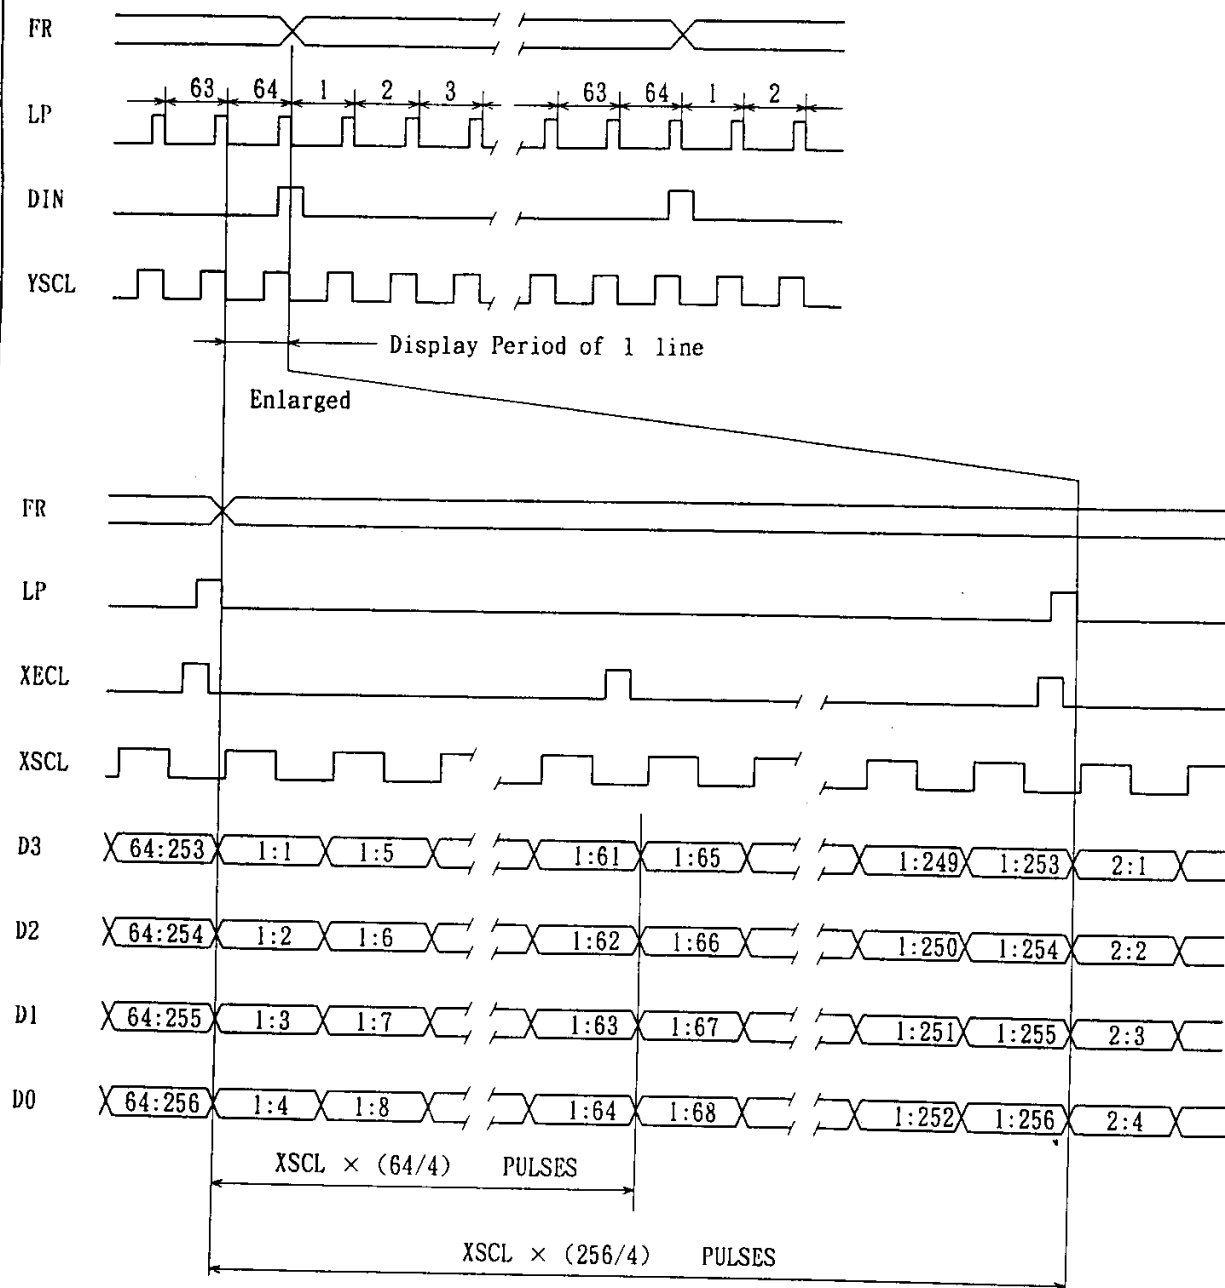

SEIKO EPSON CORPORATION

Sheet  
Code

34-25606401

### 3-5 Relation between Data and Display

|       |       |       |       |  |        |        |        |        |
|-------|-------|-------|-------|--|--------|--------|--------|--------|
| 1: 1  | 1: 2  | 1: 3  | 1: 4  |  | 1:253  | 1:254  | 1:255  | 1:256  |
| 2: 1  | 2: 2  | 2: 3  | .     |  | .      | 2:254  | 2:255  | 2:256  |
| 3: 1  | 3: 2  | .     | .     |  | .      | .      | 3:255  | 3:256  |
| 4: 1  | .     | .     | .     |  | .      | .      | .      | 4:256  |
|       |       |       |       |  |        |        |        |        |
| 61: 1 | .     | .     | .     |  | .      | .      | .      | 61:256 |
| 62: 1 | 62: 2 | .     | .     |  | .      | .      | 62:255 | 62:256 |
| 63: 1 | 63: 2 | 63: 3 | .     |  | .      | 63:254 | 63:255 | 63:256 |
| 64: 1 | 64: 2 | 64: 3 | 64: 4 |  | 64:253 | 64:254 | 64:255 | 64:256 |

#### 4. Optical Characteristics

##### 4-1 Optical Characteristics

f FR = 75 Hz

| I t e m                  | Symbol    | Temp<br>℃ | Standard Value |       |       | Unit              | Condition |
|--------------------------|-----------|-----------|----------------|-------|-------|-------------------|-----------|
|                          |           |           | M I N          | T Y P | M A X |                   |           |
| Driving Voltage          | VOP<br>*1 | 0         | —              | 14.6  | 15.6  | V                 |           |
|                          |           | 25        | —              | 13.6  | —     |                   |           |
|                          |           | 50        | 11.3           | 12.3  | —     |                   |           |
| Response Time            | T r       | 0         | —              | 300   | 600   | m s               |           |
|                          |           | 25        | —              | 100   | 200   |                   |           |
|                          | T f       | 0         | —              | 500   | 1000  |                   |           |
|                          |           | 25        | —              | 150   | 300   |                   |           |
| Recommended Viewing Area | θY1       | 25        | 20             | —     | —     | Deg               | K ≥ 2     |
|                          | θY2       |           | 30             | —     | —     |                   |           |
|                          | θX1       |           | 25             | —     | —     |                   |           |
|                          | θX2       |           | 25             | —     | —     |                   |           |
| Contrast Ratio           | K         | 25        | —              | 3     | —     |                   |           |
| Brightness *2            | B         | 20        | 52             | 65    | —     | cd/m <sup>2</sup> | *3        |
|                          |           |           | 39             | 55    | —     |                   | *4        |

\*1) Vop=LCD Driving Voltage getting maximum contrast  
=VDD-VLCD

\*2) Initial values on the surface of the EL Backlight in a Darkroom

\*3) Operation at AC100Vrms, 400Hz

\*4) Operation with suitable INVERTER(NEL-D32-49)


SEIKO EPSON CORPORATION

Sheet  
Code

41-SJ648L06

## 4-2 Definition of Optical Characteristics

### (1) Optical Measuring Equipment

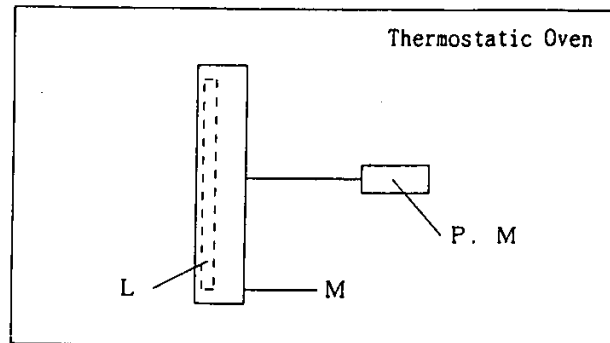

L : Built-in Backlight  
P. M : Lighting Sensor  
M : Module


[Specification of Equipments and Measuring Condition]

Luxmeter : Canon LC-3S


Brightness Measurement Spot Diameter  $\phi 2\text{mm}$

Lighting Source : Built-in Backlight (EL)

### (2) Definition of Viewing Angle

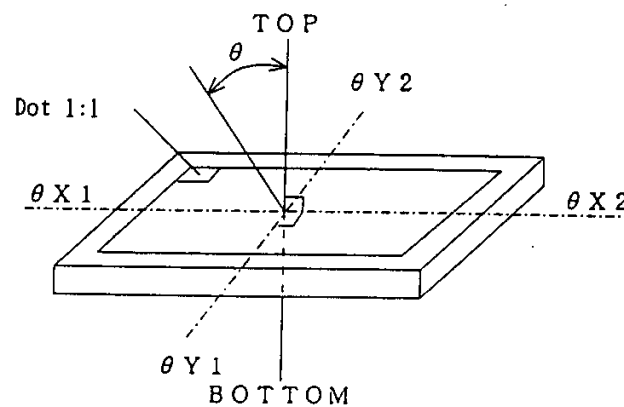


### (3) Definition of Response Time

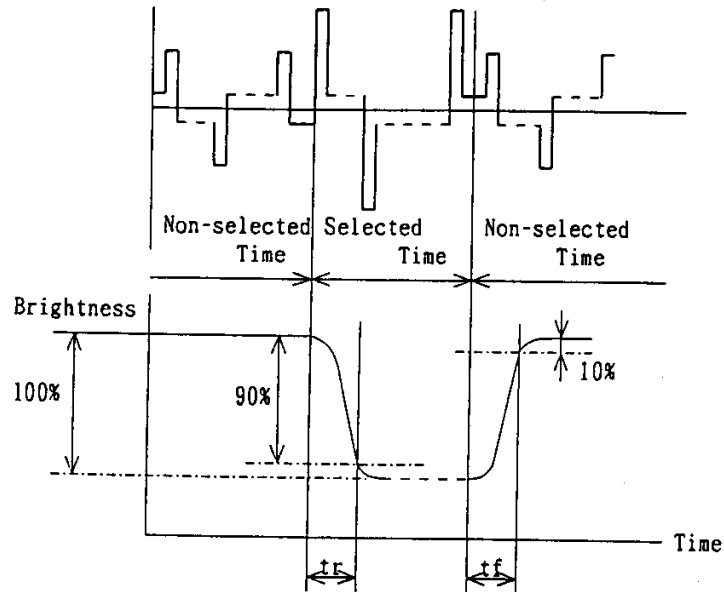

#### [ Measuring Condition ]

- VOP = TYP. value at Operating Temperature
- $\theta X = \theta Y = 0^\circ$

(4) Definition of Contrast Ratio

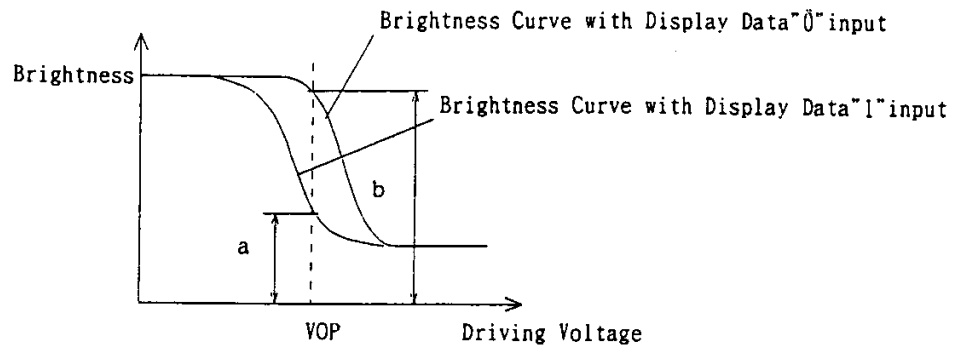

$$\text{Contrast Ratio} = \frac{\text{Brightness Curve with Display Data "0" input } b}{\text{Brightness Curve with Display Data "1" input } a}$$

[ Measuring Condition ]

- VOP = TYP. value at Operating Temperature
- $\theta X = \theta Y = 0^\circ$



## 5. Reliability

### 5-1 Content of Reliability Test

| Environmental Test |                                     |                                                                                                                                              |                                                           |                                              |
|--------------------|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------------------------------------|
| No                 | Test Item                           | Content of Test                                                                                                                              | Test Condition                                            | Applicable standard                          |
| 1                  | High temperature storage            | Endurance test applying the high storage temperature for a long time.                                                                        | 60 °C<br>200 H                                            | —                                            |
| 2                  | Low temperature storage             | Endurance test applying the low storage temperature for a long time.                                                                         | -20 °C<br>200 H                                           | —                                            |
| 3                  | High temperature Operation          | Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.                       | 50 °C<br>200 H                                            | —                                            |
| 4                  | Low temperature operation           | Endurance test applying the electric stress under low temperature for a long time.                                                           | 0 °C<br>200 H                                             | —                                            |
| 5                  | High temperature/humidity storage   | Endurance test applying the high temperature and high humidity storage for a long time.                                                      | 60 °C<br>90 %RH<br>96 H                                   | MIL-202E-103B<br>JIS-C5023                   |
| 6                  | High temperature/humidity operation | Endurance test applying the electric stress (Voltage & Current) and temperature/humidity stress to the element for a long time.              | 50 °C<br>90 %RH<br>96 H                                   | MIL-202E-103B<br>JIS-C5023                   |
| 7                  | Temperature cycle                   | Endurance test applying the low and high temperature cycle.<br>-20°C ↔ 25°C ↔ 60°C ↔ 25°C<br>30min. 5min. 30min. 5min.<br>←—————→<br>1 cycle | -20°C/60°C<br>10 cycle                                    | —                                            |
| Mechanical Test    |                                     |                                                                                                                                              |                                                           |                                              |
| 8                  | Vibration test                      | Endurance test applying the vibration during transportation and using.                                                                       | 10~22Hz→1.5mm-p<br>22~500Hz →1.5G<br>Total 0.5H           | MIL-202E-201A<br>JIS-C5025<br>JIS-C7022-A-10 |
| 9                  | Shock test                          | Constructional and mechanical endurance test applying the shock during transportation.                                                       | 50G Half sign wave<br>11msec<br>3 times of each direction | MIL-202E-213B                                |
| 10                 | Atmospheric pressure test           | Endurance test applying the atmospheric pressure during transportation by air.                                                               | 115 mbar<br>40 H                                          | MIL-202E-105C                                |
| Others             |                                     |                                                                                                                                              |                                                           |                                              |
| 11                 | Static electricity test             | Endurance test applying the electric stress to the terminal.                                                                                 | VS = 800 v<br>RS = 1.5 kΩ<br>CS = 100 PF<br>1 time        | MIL-883B-3015.1                              |

\*1) Driving condition for operation test

Power supply voltage for Logic system = 5V

Power supply voltage for LCD system = Getting Optimum Contrast at 25°C

# 5-2 Failure Judgement Criterion

| Criterriion<br>Item          | Test Item No. |   |   |   |   |   |   |   |   |    |    | Failure Judgment Criterion                                                                       |
|------------------------------|---------------|---|---|---|---|---|---|---|---|----|----|--------------------------------------------------------------------------------------------------|
|                              | 1             | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |                                                                                                  |
| Basic<br>Specification       | ○             | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○  | ○  | Out of<br>the Basic Specification                                                                |
| Electrical<br>characteristic | ○             |   | ○ | ○ | ○ | ○ |   |   |   |    | ○  | Out of<br>the DC and AC Characteristic                                                           |
| Mechanical<br>characteristic |               |   |   |   |   | ○ | ○ | ○ | ○ |    |    | Out of<br>the Mechanical Specification<br>Color change : Out of Limit<br>Apperance Specification |
| Optical<br>characteristic    | ○             | ○ | ○ | ○ | ○ | ○ | ○ |   |   | ○  | ○  | Out of<br>the Apperance Standard                                                                 |

## 6. Package Specifications

### 6-1 Inner Carton Box

Each LCD module is wrapped with a antistatic pouch, and put into the inner carton box for containing 10 pcs of LCD module.

The following contents should be indicated on the inner carton box.

|       |                                       |
|-------|---------------------------------------|
| Type  | EG2401S-ER                            |
| Q'ty  | 10 pcs.                               |
| Lot   | Lot No.                               |
| EPSON | SEIKO EPSON CORP.<br>DISPLAY DIVISION |

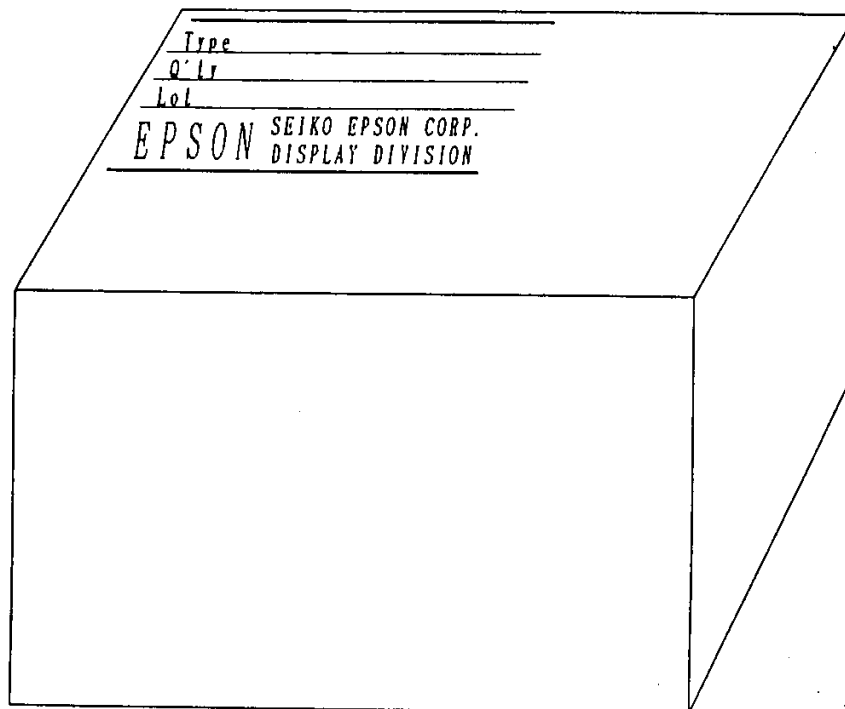


Fig.1 Outline of Inner Carton Box

SEIKO EPSON CORPORATION

Sheet  
Code

61-010006210

## 6-2 Master Carton Box

The master carton box is for sending to each user.  
 The master carton box contains 4 pcs of inner carton box.  
 The indications are applied to four faces A, B, C and D of the master carton as shown Fig. 1 below.

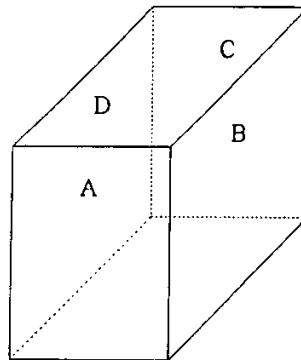


Fig. 1 Outline of Master Carton Box

Face A

↑  
UP

|           |            |
|-----------|------------|
| MODEL :   | EG2401S-ER |
| Q' TY :   | 40pcs      |
| C / N o : |            |

Face B

|               |                                                                |
|---------------|----------------------------------------------------------------|
|               | FRAGILE<br>STATIC SENSITIVE DAMAGED<br>BY EXCESS HEAT OR COLD. |
|               |                                                                |
|               |                                                                |
| MADE IN JAPAN |                                                                |

Face C

↑  
UP

Face D

|  |                                                                |
|--|----------------------------------------------------------------|
|  | FRAGILE<br>STATIC SENSITIVE DAMAGED<br>BY EXCESS HEAT OR COLD. |
|  |                                                                |
|  |                                                                |


Fig. 2 Contents of Indication for Master Carton Box

SEIKO EPSON CORPORATION

Sheet  
Code

62-010006210

# 7 Luminous Area of EL

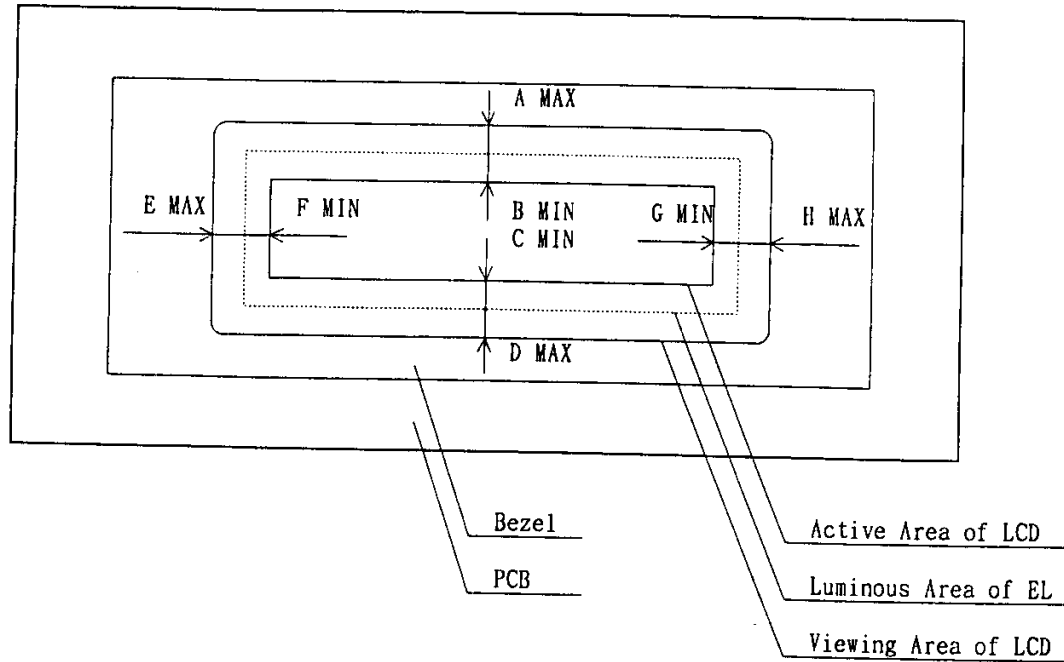

(mm)

| A   | B   | C   | D   | E   | F   | G | H |
|-----|-----|-----|-----|-----|-----|---|---|
| 3.0 | 0.6 | 0.4 | 2.0 | 1.7 | 1.8 | - | 0 |

SEIKO EPSON CORPORATION

Sheet  
Code

A4-S0000000-A

## Precautions for use of LCD Modules

### <Handling Precautions>

- The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth. If the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.
- Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following solvents.

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following.

- Water
- Ketone
- Aromatic solvents
- Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- Install the LCD Module by using the mounting holes. When mounting the LCD Module make sure that it is free of twisting, warping, and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.
- Do not attempt to disassemble or process the LCD Module.
- NC terminal should be open. Do not connect anything.
- If the logic circuit power is off, do not apply the input signals.

- To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

- Be sure to ground the body when handling the LCD Modules.
- Tools required for assembly, such as soldering irons, must be properly grounded.
- To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
- The LCD Module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.

#### <Storage Precautions>

- When storing the LCD Modules, avoid exposure to direct sunlight or to the light of fluorescent lamps. Keep the modules in bags designed to prevent static electricity charging under low temperature/normal humidity conditions (avoid high temperature/high humidity and low temperatures below 0 °C). Whenever possible, the LCD Modules should be stored in the same conditions in which they were shipped from our company.

#### <Design Precautions>

- The absolute maximum ratings represents the rated value beyond which LCD Modules cannot exceed. When the LCD Modules are used in excess of this rated value, their operating characteristics may be adversely affected.
- To prevent the occurrence of erroneous operation caused by noise, attention must be paid to satisfy VII, VIII, and the other specification values, including taking the precaution of using signal cables that are short.
- The liquid crystal display exhibits temperature dependency characteristics. Since recognition of the display becomes difficult when the LCD is used outside its designated operating temperature range, be sure to use the LCD within this range. Also, keep in mind that the voltage levels necessary for clear displays (VLCD or VDDH) will vary according to temperature.
- If DC is impressed on the liquid crystal display panel, display definition is rapidly deteriorated by the electrochemical reaction that occurs inside the liquid crystal panel. To eliminate the opportunity of DC impressing, be sure to maintain the AC characteristics of the input signals sent to the LCD Module (especially, LP, DIN, and FR).

- When turning the power supply ON/OFF, strictly follow the sequence shown in Fig. 1 so that latch-up and DC driving of the LCD Module can be prevented.

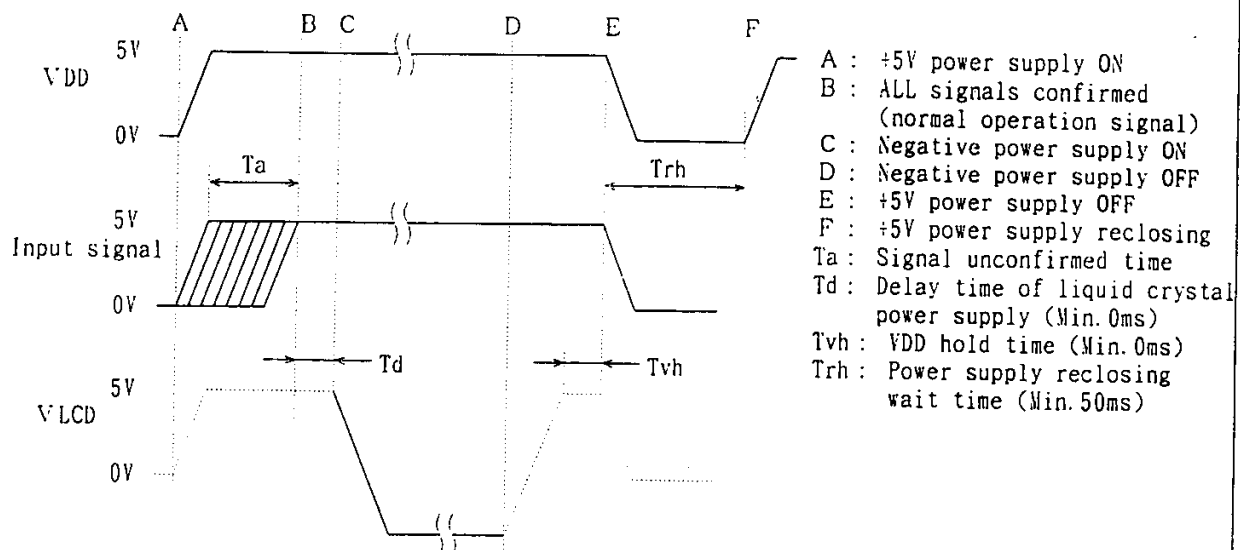


Fig. 1 Power supply ON/OFF sequence

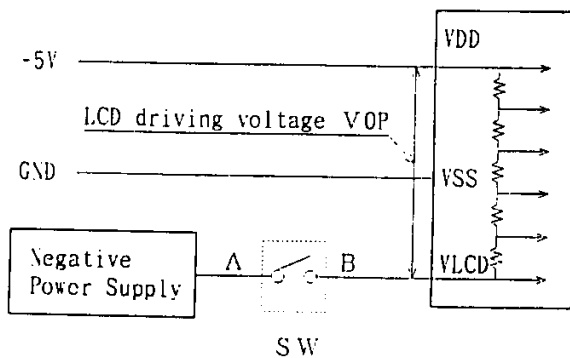


Fig. 2 Example of power supply connection

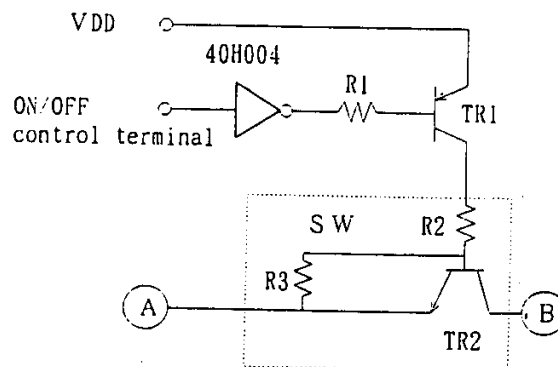


Fig. 3 Example of SW section circuit

- Fig. 1 shows the voltage levels at the module terminal section when the module is connected to a power supply and signal lines.
- Regarding VLCD in Fig. 1, the dashed line shows the OFF status of SW in Fig. 2, while the solid line indicates the ON status.
- Prepare the negative power supply shown in Fig. 2 with a capacity that is at least sufficient to handle the current of the liquid crystal power supply in DC characteristics.
- Fig. 3 provides an example of the circuit for SW section in Fig. 2.



(Others)

- Liquid crystals solidify under low temperatures (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subjected to a strong shock at a low temperature.
- If the LCD Modules have been operating for a long time showing the same display patterns, the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be regained by suspending use for some time.  
It should be noted that this phenomenon does not adversely affect performance reliability.
- To minimize the performance degradation of the LCD Modules resulting from destruction caused by static electricity, etc., exercise care to avoid holding the following sections when handling the modules.
  - Exposed area of the printed circuit board
  - Terminal electrode sections

Revision Record

| REV. | Revision Items | Date       |
|------|----------------|------------|
|      |                | 1993. 1.28 |
| A    |                |            |
| B    |                |            |
| C    |                |            |
| D    |                |            |
| E    |                |            |
| F    |                |            |
| G    |                |            |
| H    |                |            |
| I    |                |            |
| J    |                |            |
| K    |                |            |
| L    |                |            |
| M    |                |            |
| N    |                |            |
| P    |                |            |
| Q    |                |            |
| R    |                |            |
| S    |                |            |
| T    |                |            |
| U    |                |            |
| V    |                |            |
| W    |                |            |
| X    |                |            |

SEIKO EPSON CORPORATION

Sheet  
Code

00-010006210