


## 1.0A Sintered Glass Passivated Super Fast Rectifier

### Features

- Sintered glass passivated (SGP) rectifier chip
- Glass passivated cavity-free junction
- Ideal for surface mount automotive applications
- Built-in strain relief
- Easy pick and place
- High temperature soldering guaranteed: 260°C/10 seconds, at terminals
- RoHS Compliance



SMA



### Mechanical Data

|                   |                                                          |
|-------------------|----------------------------------------------------------|
| <b>Case:</b>      | JEDEC DO-214AC(SMA) molded plastic over passivated chip  |
| <b>Epoxy:</b>     | Plastic package has UL flammability classification 94V-0 |
| <b>Terminals:</b> | Solder plated, solderable per MIL-STD-750, Method 2026   |
| <b>Polarity:</b>  | Color band denotes cathode end                           |
| <b>Weight:</b>    | 0.002 ounces, 0.064 gram                                 |

### Maximum Ratings and Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless noted otherwise)

| Symbol                   | Description                               | EGF1A | EGF1B | EGF1D | EGF1G | EGF1J | EGF1K | Unit | Conditions                                                            |
|--------------------------|-------------------------------------------|-------|-------|-------|-------|-------|-------|------|-----------------------------------------------------------------------|
| <b>V<sub>RRM</sub></b>   | Maximum Repetitive Peak Reverse Voltage   | 50    | 100   | 200   | 400   | 600   | 800   | V    |                                                                       |
| <b>V<sub>RMS</sub></b>   | Maximum RMS Voltage                       | 35    | 70    | 140   | 280   | 420   | 560   | V    |                                                                       |
| <b>V<sub>DC</sub></b>    | Maximum DC Blocking Voltage               | 50    | 100   | 200   | 400   | 600   | 800   | V    |                                                                       |
| <b>I<sub>F(AV)</sub></b> | Maximum Average Forward Rectified Current | 1.0   |       |       |       |       |       | A    | T <sub>L</sub> =110° C                                                |
| <b>I<sub>FSM</sub></b>   | Peak Forward Surge Current                | 30    |       |       |       | 25    |       | A    | 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) |

# 1.0A Sintered Glass Passivated Super Fast Rectifier

## EGF1A - EGF1K

| Symbol                           | Description                                             | EGF1A       | EGF1B | EGF1D | EGF1G | EGF1J | EGF1K | Unit   | Conditions                                                         |
|----------------------------------|---------------------------------------------------------|-------------|-------|-------|-------|-------|-------|--------|--------------------------------------------------------------------|
| V <sub>F</sub>                   | Maximum Instantaneous Forward Voltage                   | 0.95        |       |       | 1.25  | 1.70  | 2.20  | V      | I <sub>F</sub> =1.0 A                                              |
| I <sub>R</sub>                   | Maximum DC Reverse Current at Rated DC Blocking Voltage | 5.0         |       |       |       |       |       | μA     | T <sub>A</sub> =25° C                                              |
|                                  |                                                         | 50          |       |       |       |       |       |        | T <sub>A</sub> =125° C                                             |
| T <sub>rr</sub>                  | Maximum Reverse Recovery Time                           | 35          |       |       |       |       |       | nS     | I <sub>F</sub> =0.5A, I <sub>R</sub> =1.0A, I <sub>rr</sub> =0.25A |
| C <sub>J</sub>                   | Typical Junction Capacitance                            | 10          |       |       |       |       |       | pF     | V <sub>R</sub> =4V, f=1MHz                                         |
| R <sub>thJA</sub>                | Typical Thermal Resistance                              | 34          |       |       |       |       |       | °C / W | Note                                                               |
| T <sub>J</sub> ,T <sub>STG</sub> | Operating junction and Storage Temperature Range        | -55 to +175 |       |       |       |       |       | ° C    |                                                                    |

**Note:** Thermal resistance from junction to ambient P.C.B mounted on 0.2x0.2" (5.0x5.0mm) copper pad areas.

### Typical Characteristics Curves

Fig.1- Forward Current Derating Curve


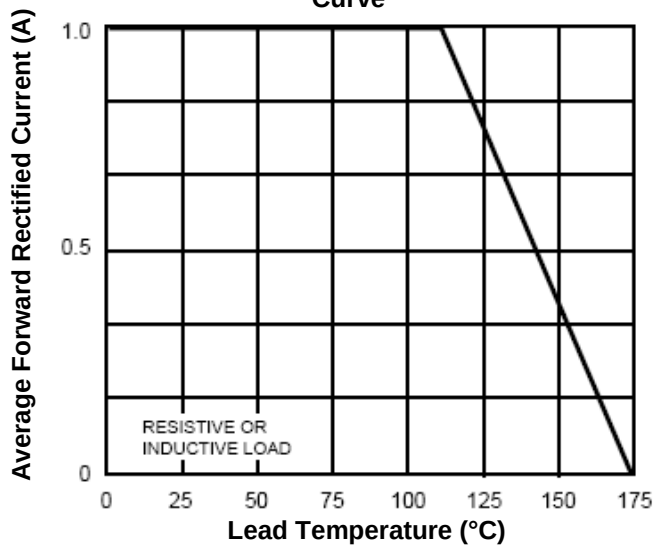


Fig.2-Max. Non-Repetitive Forward Surge Current

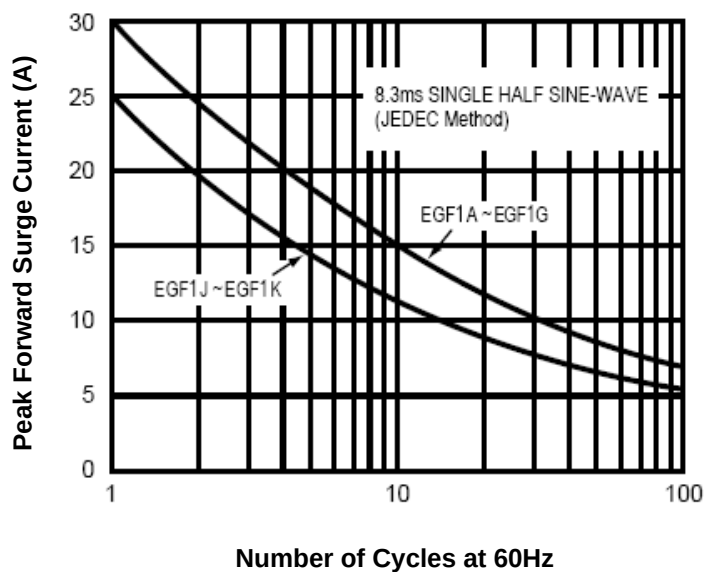

# 1.0A Sintered Glass Passivated Super Fast Rectifier

## EGF1A - EGF1K

Fig.3- Typical Instantaneous Forward Characteristics

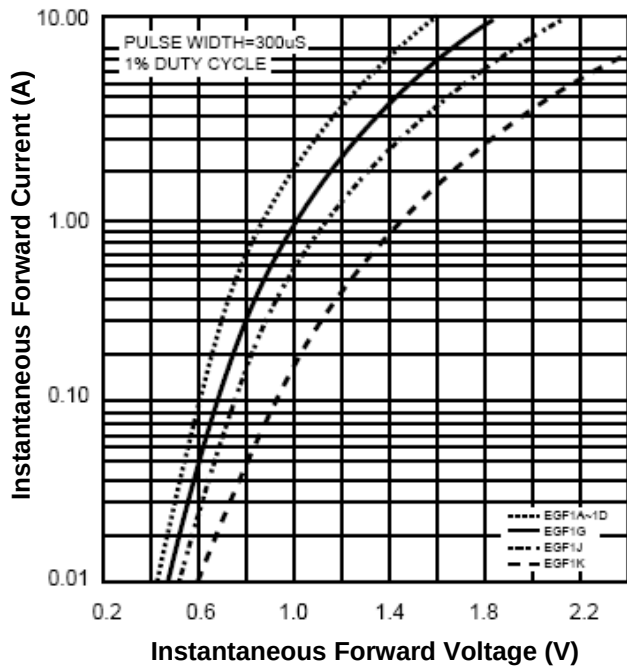


Fig.4-Typical Reverse Characteristics


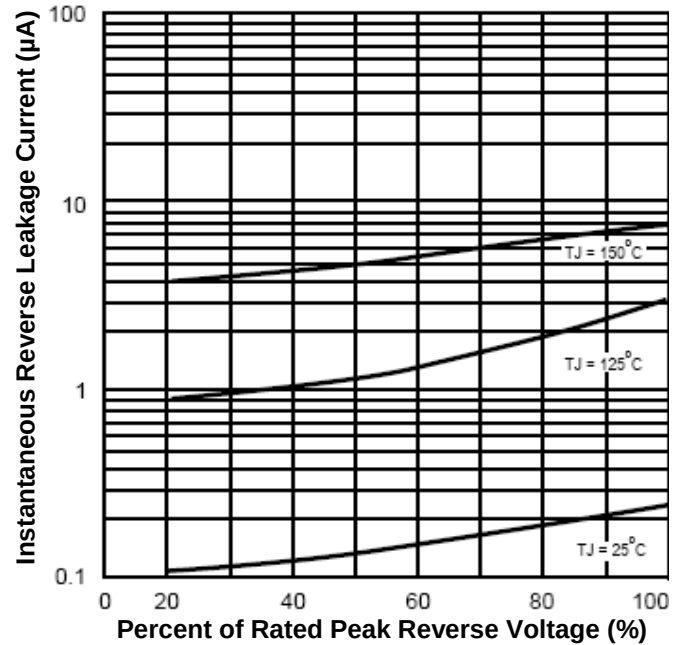



Fig.5- Typical Junction Capacitance

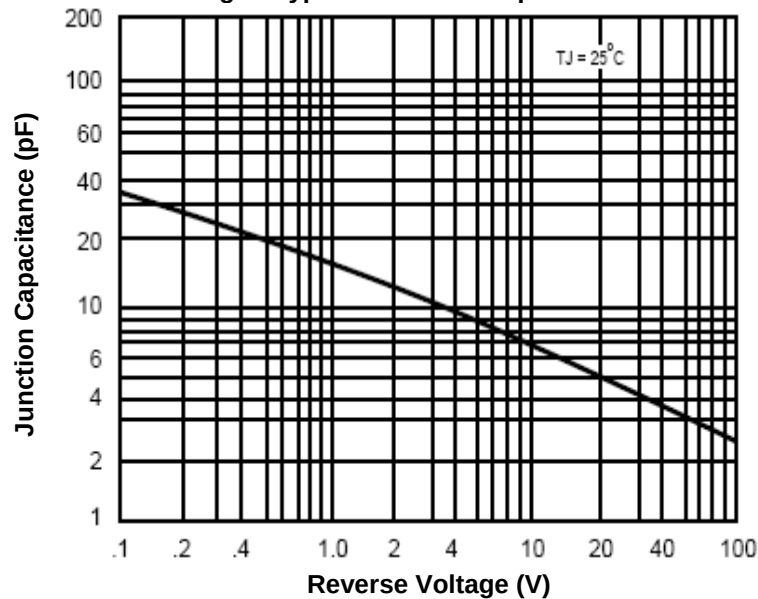

# 1.0A Sintered Glass Passivated Super Fast Rectifier

EGF1A - EGF1K

## Dimensions in inches (mm)

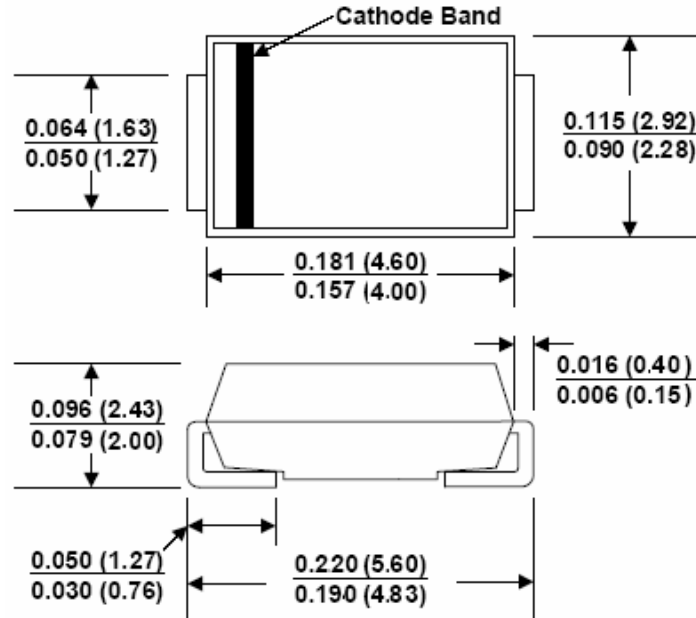

SMA

## How to contact us:

### US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: [taitron@taitroncomponents.com](mailto:taitron@taitroncomponents.com)

Http://[www.taitroncomponents.com](http://www.taitroncomponents.com)

### TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.

42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

### TAITRON COMPONETS INCORPORATED E REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

### TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931