

EL - 325

The EL - 325 is a GaAs IRED mounted in a low profile clear epoxy package. This IRED is both compact and easy to mount.

FEATURES


- Ultra compact
- Low profile
- Snap- in mount is possible

APPLICATIONS

- Photointerrupters
- Optical equipment

DIMENSIONS

(Unit : mm)

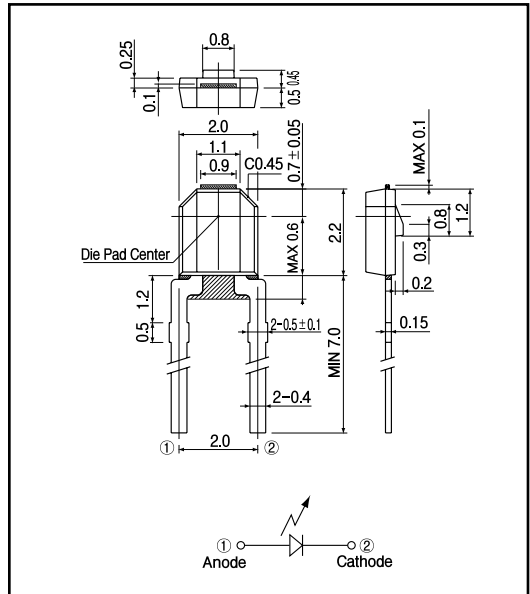

MAXIMUM RATINGS

(Ta=25)

Item	Symbol	Rating	Unit
Reverse voltage	V_R	5	V
Forward current	I_F	50	mA
Power dissipation	P_D	100	mW
Pulse forward current ^{*1}	I_{FP}	0.5	A
Operating temp.	$T_{opr.}$	- 25 + 85	
Storage temp.	$T_{stg.}$	- 30 + 85	
Soldering temp. ^{*2}	$T_{sol.}$	260	

*1. pulse width : t_w 100 μ sec. period : $T=10$ msec.

*2. For MAX.5 seconds at the position of 2 mm from the package

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25)


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Forward voltage	V_F	$I_F=50$ mA			1.6	V
Reverse current	I_R	$V_R=5$ V			10	μ A
Peak emission wavelength	λ_p	$I_F=50$ mA		940		nm
Spectral bandwidth		$I_F=50$ mA		50		nm
Radiant intensity ^{*3}	P_D	$I_F=50$ mA		0.7		mW/sr
Half angle				± 50		deg.

*3. Measured by tester of KODENSHI CORP.


Infrared Emitting Diodes(GaAs)

EL - 325


Power dissipation Vs. Ambient temperature

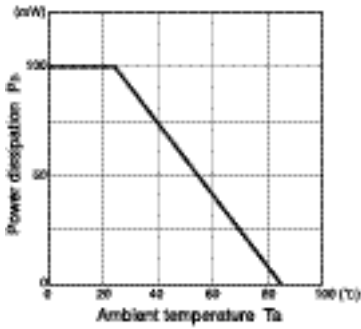


Radiant intensity Vs. Forward current

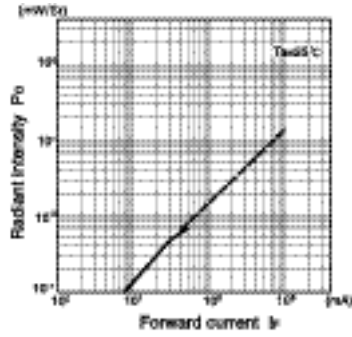


Relative radiant intensity Vs. Ambient temperature

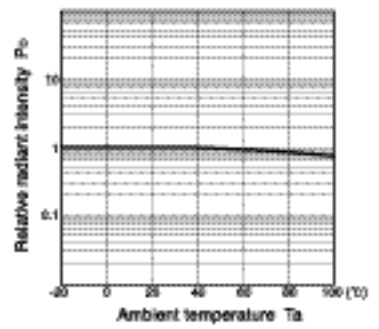


Relative intensity Vs. Wavelength

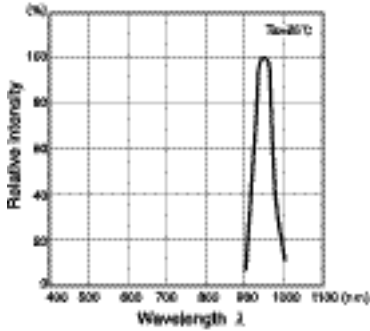

Forward current vs. Forward voltage

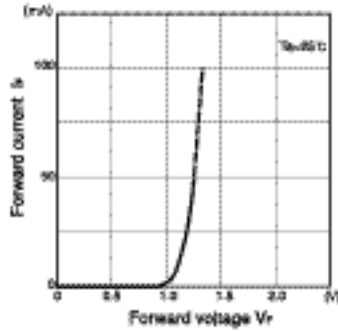

Radiant Pattern

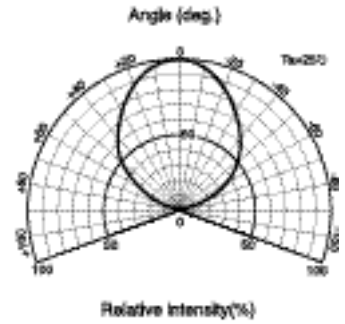

Relative radiant intensity Vs. Distance

