

EM1005 Series

AC/DC Single Output Interchangeable Plug

• 6Watts Max.



Features

- DoE VI Compliance
- RoHS Compliance
- Over Voltage Protective Installation
- Short Circuit Protective Installation
- Protection Type: Auto Recovery
- MTBF > 100,000 hours

EM1005 X Y Z T-vv PP

- x:** Output range
Y: Case type (V)Vertical or (H)Horizontal to denote different enclosure
Z: AC plug type: • U: USA • E: EU • K: UK
T: Output type U (USB), S (SR)
vv: Specified output voltage, ie 12 is 12Vdc.
PP: Connector type, ie 01 for EDACPOWER standard dc cable or please refer to the appendix page

Electrical Specifications

MODEL No.	MAX. OUTPUT POWER (W)	OUTPUT VOLTAGE (Vo)	MIN. LOAD (Io)	MAX. LOAD (Io)	LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
EM1005A	6	5~8V	0A	1.2A	± 5%	± 1%	100mV
EM1005B	6	9~12V	0A	0.66A	± 5%	± 1%	180mV
EM1005C	4.5W	9V	0A	0.5A	± 5%	± 1%	180mV
EM1005D	6W	9V	0A	0.67A	± 5%	± 1%	180mV

NOTE:

- 1 : Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uf ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
- 2 : Line regulation is defined by changing ±10% of input voltage from nominal line at rated load.
- 3 : Max. Power (W) = $V_o \times I_o$

Electrical Specifications

INPUT

- Input Range: 100 to 240VAC
- Frequency: 50 to 60Hz
- Input Current: ≤0.6A ~ 0.3A
- Inrush Current: ≤60A
- Efficiency: Meet CEC LEVEL VI
- Hold Up Time: ≥8.3mS
- Turn On Time: ≤3S

OUTPUT

- Over Voltage Protection: Auto Recovery
- Over Current Protection: Auto Recovery
- Short Circuit Protection: Auto Recovery


ENVIRONMENTAL

- Operating Temperature: 0 to 40°C
- Storage Temperature: -20 to 85°C
- Operating Humidity: 10% to 90%
- Storage Humidity: 5% to 95%

SAFETY

- UL/cUL UL60601, TUV/SUD EN/IEC 60601 CB,CE, FCC

Mechanical Specification

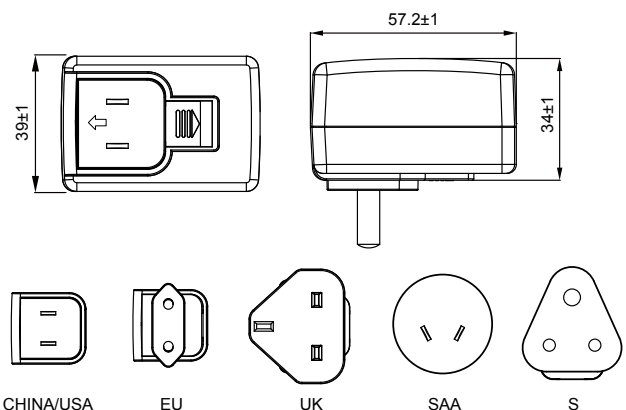

- Case Size: 57.2L x 39W x 34H (mm)
- AC Plug: • U: USA pin • C: CHINA pin • E: EU • K: UK
 • A: SAA • S: South Africa
- Weight: 70g