

[Document Title](#)

**256K x8 bit Low Power and Low Voltage Full CMOS Static RAM**

[Revision History](#)

Revision No.	History	Draft Date	Remark
0.0	Initial Draft	Oct. 31, 2007	
0.1	0.1 Revision    Fix typo error	Nov. 16, 2007	

**Emerging Memory & Logic Solutions Inc.**

4F Korea Construction Financial Cooperative B/D, 301-1 Yeon-Dong, Jeju-Si, Jeju-Do, Rep.of Korea    Zip Code : 690-719  
Tel : +82-64-740-1712    Fax : +82-64-740-1749~1750 /    Homepage : [www.emlsi.com](http://www.emlsi.com)

---

The attached data sheets are provided by EMLSI reserve the right to change the specifications and products. EMLSI will answer to your questions about device. If you have any questions, please contact the EMLSI office.

**256K x8 Bit Low Power and Low Voltage CMOS Static RAM**

**FEATURES**



- Process Technology : 0.15µm Full CMOS
- Organization :256K x8
- Power Supply Voltage  
=> EM620FU8B : 2.7~3.3V
- Low Data Retention Voltage : 1.5V
- Three state output and TTL Compatible
- Packaged product designed for 45/55/70ns

**GENERAL PHYSICAL SPECIFICATIONS**

- Backside die surface of polished bare silicon
- Typical Die Thickness = 725um +/-15um
- Typical top-level metallization :  
=> Metal (Ti/AiCu/TiN/ARC SiON/SiO2) : 5.2K Angstroms
- Topside Passivation :  
=> Passivation (HDP/pNIT/PIQ) : 5.4K Angstroms
- Wafer diameter : 8 inch

**PAD DESCRIPTIONS**

Name	Function	Name	Function
$\overline{CS1}, CS2$	Chip select inputs	Vcc	Power Supply
$\overline{OE}$	Output Enable input	Vss	Ground
$\overline{WE}$	Write Enable input	NC	No Connection
A0~A17	Address Inputs		
I/O0~I/O7	Data Inputs/Outputs		

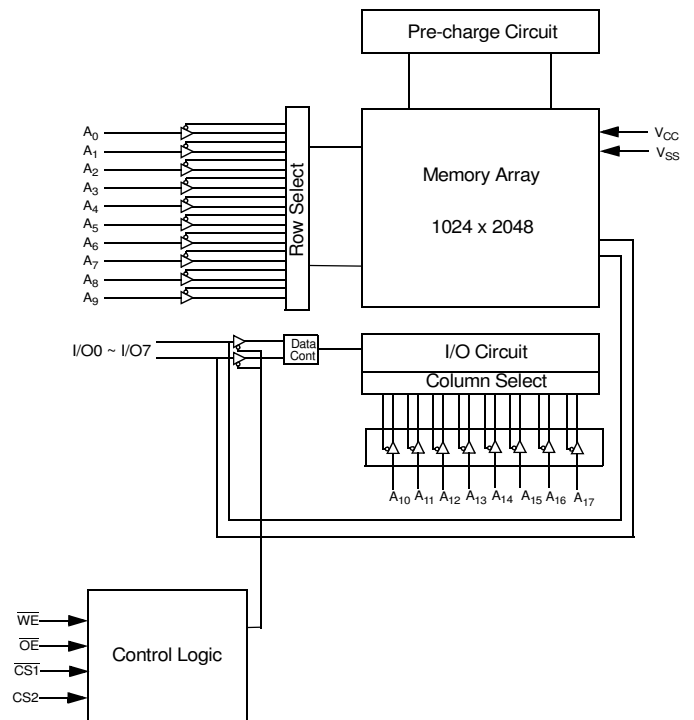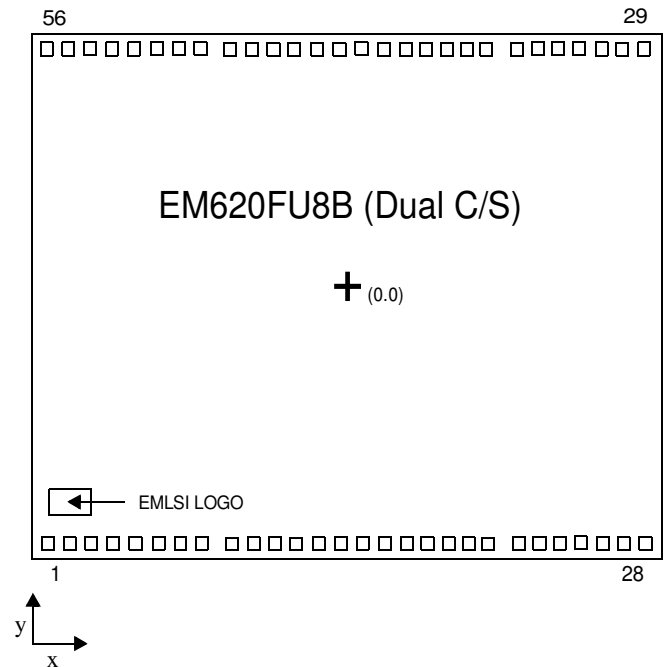

**BONDING INSTRUCTIONS**

The 2M full CMOS SRAM die has total 56pads. Refer to the bond pad location and identification table for X, Y coordinates. EMLSI recommends using a bond wire on back side of die onto Vss bond pad for improved noise immunity.

**ABSOLUTE MAXIMUM RATINGS \***

Parameter	Symbol	Minimum	Unit
Voltage on Any Pin Relative to Vss	$V_{IN}, V_{OUT}$	-0.2 to 4.0V	V
Voltage on Vcc supply relative to Vss	$V_{CC}$	-0.2 to 4.0V	V
Power Dissipation	$P_D$	1.0	W
Operating Temperature	$T_A$	-40 to 85	°C

\* Stresses greater than those listed above “Absolute Maximum Ratings” may cause permanent damage to the device. Functional operation should be restricted to recommended operating condition. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

**FUNCTIONAL DESCRIPTION**

$\overline{CS1}$	$CS2$	$\overline{OE}$	$\overline{WE}$	I/O <sub>0-7</sub>	Mode	Power
H	X	X	X	High-Z	Deselected	Stand by
X	L	X	X	High-Z	Deselected	Stand by
L	H	H	H	High-Z	Output Disabled	Active
L	H	L	H	Data Out	Read	Active
L	H	X	L	Data In	Write	Active

Note: X means don't care. (Must be low or high state)

## RECOMMENDED DC OPERATING CONDITIONS <sup>1)</sup>

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	$V_{CC}$	2.7	3.0	3.3	V
Ground	$V_{SS}$	0	0	0	V
Input high voltage	$V_{IH}$	2.0	-	$V_{CC} + 0.2^{2)}$	V
Input low voltage	$V_{IL}$	$-0.2^{3)}$	-	0.6	V

1.  $T_A = -40$  to  $85^\circ\text{C}$ , otherwise specified
2. Overshoot:  $V_{CC} + 2.0$  V in case of pulse width  $\leq 20$ ns
3. Undershoot:  $-2.0$  V in case of pulse width  $\leq 20$ ns
4. Overshoot and undershoot are sampled, not 100% tested.

## CAPACITANCE <sup>1)</sup> ( $f = 1\text{MHz}$ , $T_A = 25^\circ\text{C}$ )

Item	Symbol	Test Condition	Min	Max	Unit
Input capacitance	$C_{IN}$	$V_{IN} = 0\text{V}$	-	8	pF
Input/Output capacitance	$C_{IO}$	$V_{IO} = 0\text{V}$	-	10	pF

1. Capacitance is sampled, not 100% tested.

## DC AND OPERATING CHARACTERISTICS

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit			
Input leakage current	$I_{LI}$	$V_{IN} = V_{SS}$ to $V_{CC}$	-1	-	1	$\mu\text{A}$			
Output leakage current	$I_{LO}$	$\overline{CS1} = V_{IH}$ or $CS2 = V_{IL}$ or $\overline{OE} = V_{IH}$ or $\overline{WE} = V_{IL}$ $V_{IO} = V_{SS}$ to $V_{CC}$	-1	-	1	$\mu\text{A}$			
Operating power supply	$I_{CC}$	$I_{IO} = 0\text{mA}$ , $\overline{CS1} = V_{IL}$ , $CS2 = \overline{WE} = V_{IH}$ , $V_{IN} = V_{IH}$ or $V_{IL}$	-	-	3	mA			
Average operating current	$I_{CC1}$	Cycle time = $1\mu\text{s}$ , 100% duty, $I_{IO} = 0\text{mA}$ , $\overline{CS1} \leq 0.2\text{V}$ , $CS2 \geq V_{CC} - 0.2\text{V}$ , $V_{IN} \leq 0.2\text{V}$ or $V_{IN} \geq V_{CC} - 0.2\text{V}$	-	-	3	mA			
			$I_{CC2}$	Cycle time = Min, $I_{IO} = 0\text{mA}$ , 100% duty, $\overline{CS1} = V_{IL}$ , $CS2 = V_{IH}$ , $V_{IN} = V_{IL}$ or $V_{IH}$	45ns	-	-	35	mA
					70ns	-	-	25	
Output low voltage	$V_{OL}$	$I_{OL} = 2.1\text{mA}$	-	-	0.4	V			
Output high voltage	$V_{OH}$	$I_{OH} = -1.0\text{mA}$	2.4	-	-	V			
Standby Current (TTL)	$I_{SB}$	$\overline{CS1} = V_{IH}$ , $CS2 = V_{IL}$ , Other inputs = $V_{IH}$ or $V_{IL}$	-	-	0.3	mA			
Standby Current (CMOS)	$I_{SB1}$	$\overline{CS1} \geq V_{CC} - 0.2\text{V}$ , $CS2 \geq V_{CC} - 0.2\text{V}$ ( $\overline{CS}$ controlled) or $0\text{V} \leq CS2 \leq 0.2\text{V}$ ( $CS2$ controlled), Other inputs = $0 \sim V_{CC}$ (Typ. condition : $V_{CC} = 3.0\text{V}$ @ $25^\circ\text{C}$ ) (Max. condition : $V_{CC} = 3.3\text{V}$ @ $85^\circ\text{C}$ )	LF	-	1 <sup>1)</sup>	10	$\mu\text{A}$		

### NOTES

1. Typical values are measured at  $V_{CC} = 3.0\text{V}$ ,  $T_A = 25^\circ\text{C}$  and not 100% tested.

## AC OPERATING CONDITIONS

**Test Conditions** (Test Load and Test Input/Output Reference)

Input Pulse Level : 0.4V to 2.2V

Input Rise and Fall Time : 5ns

Input and Output reference Voltage : 1.5V

Output Load (See right) :  $CL^{(1)} = 100\text{pF} + 1 \text{ TTL}$


$CL^{(1)} = 30\text{pF} + 1 \text{ TTL}$  (only 45ns part)

1. Including scope and Jig capacitance

2.  $R_1=3070 \text{ ohm}$ ,  $R_2=3150 \text{ ohm}$

3.  $V_{TM}=2.8\text{V}$

4.  $CL = 5\text{pF} + 1 \text{ TTL}$  (measurement with  $t_{LZ1,2}$ ,  $t_{HZ1,2}$ ,  $t_{OLZ}$ ,  $t_{OHZ}$ ,  $t_{WHZ}$ )

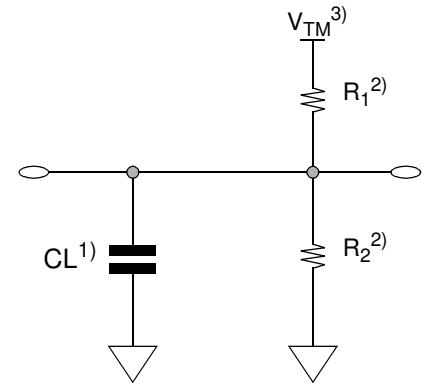

**READ CYCLE** ( $V_{CC} = 2.7\text{V}$  to  $3.3\text{V}$ ,  $Gnd = 0\text{V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )


Parameter	Symbol	45ns		55ns		70ns		Unit
		Min	Max	Min	Max	Min	Max	
Read cycle time	$t_{RC}$	45	-	55	-	70	-	ns
Address access time	$t_{AA}$	-	45	-	55	-	70	ns
Chip select to output	$t_{CO1}, t_{CO2}$	-	45	-	55	-	70	ns
Output enable to valid output	$t_{OE}$	-	25	-	25	-	35	ns
Chip select to low-Z output	$t_{LZ1}, t_{LZ2}$	10	-	10	-	10	-	ns
Output enable to low-Z output	$t_{OLZ}$	5	-	5	-	5	-	ns
Chip disable to high-Z output	$t_{HZ1}, t_{HZ2}$	0	20	0	20	0	25	ns
Output disable to high-Z output	$t_{OHZ}$	0	15	0	20	0	25	ns
Output hold from address change	$t_{OH}$	10	-	10	-	10	-	ns

**WRITE CYCLE** ( $V_{CC} = 2.7\text{V}$  to  $3.3\text{V}$ ,  $Gnd = 0\text{V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )


Parameter	Symbol	45ns		55ns		70ns		Unit
		Min	Max	Min	Max	Min	Max	
Write cycle time	$t_{WC}$	45	-	55	-	70	-	ns
Chip select to end of write	$t_{CW1}, t_{CW2}$	45	-	45	-	60	-	ns
Address setup time	$t_{AS}$	0	-	0	-	0	-	ns
Address valid to end of write	$t_{AW}$	45	-	45	-	60	-	ns
Write pulse width	$t_{WP}$	35	-	40	-	50	-	ns
Write recovery time	$t_{WR}$	0	-	0	-	0	-	ns
Write to output high-Z	$t_{WHZ}$	0	15	0	20	0	20	ns
Data to write time overlap	$t_{DW}$	25	-	25	-	30	-	ns
Data hold from write time	$t_{DH}$	0	-	0	-	0	-	ns
End write to output low-Z	$t_{OW}$	5	-	5	-	5	-	ns

## TIMING DIAGRAMS

**TIMING WAVEFORM OF READ CYCLE(1) (Address Controlled,  $\overline{CS1}=\overline{OE}=V_{IL}$ ,  $CS2=\overline{WE}=V_{IH}$ )**

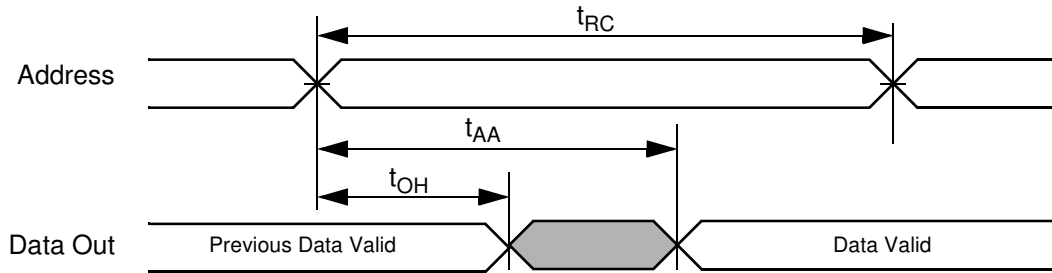


**TIMING WAVEFORM OF READ CYCLE(2) ( $\overline{WE} = V_{IH}$ )**

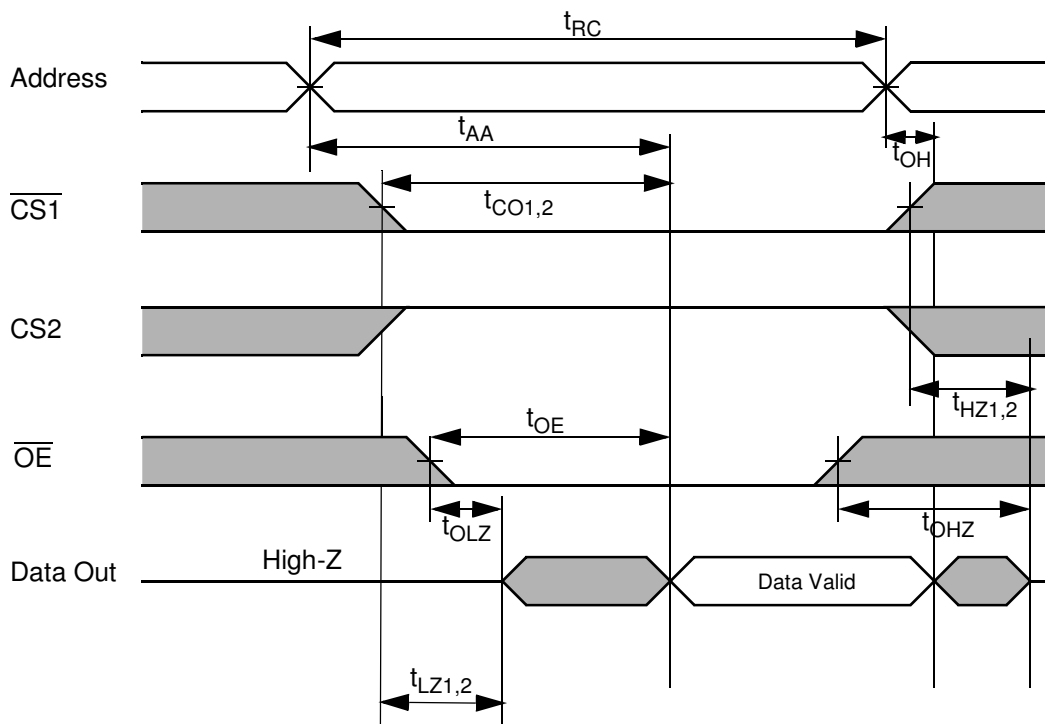


### NOTES (READ CYCLE)

- $t_{HZ1,2}$  and  $t_{OHZ}$  are defined as the outputs achieve the open circuit conditions and are not referenced to output voltage levels.
- At any given temperature and voltage condition,  $t_{HZ1,2}(\text{Max.})$  is less than  $t_{LZ1,2}(\text{Min.})$  both for a given device and from device to device interconnection.


**TIMING WAVEFORM OF WRITE CYCLE(1) ( $\overline{WE}$  CONTROLLED)**

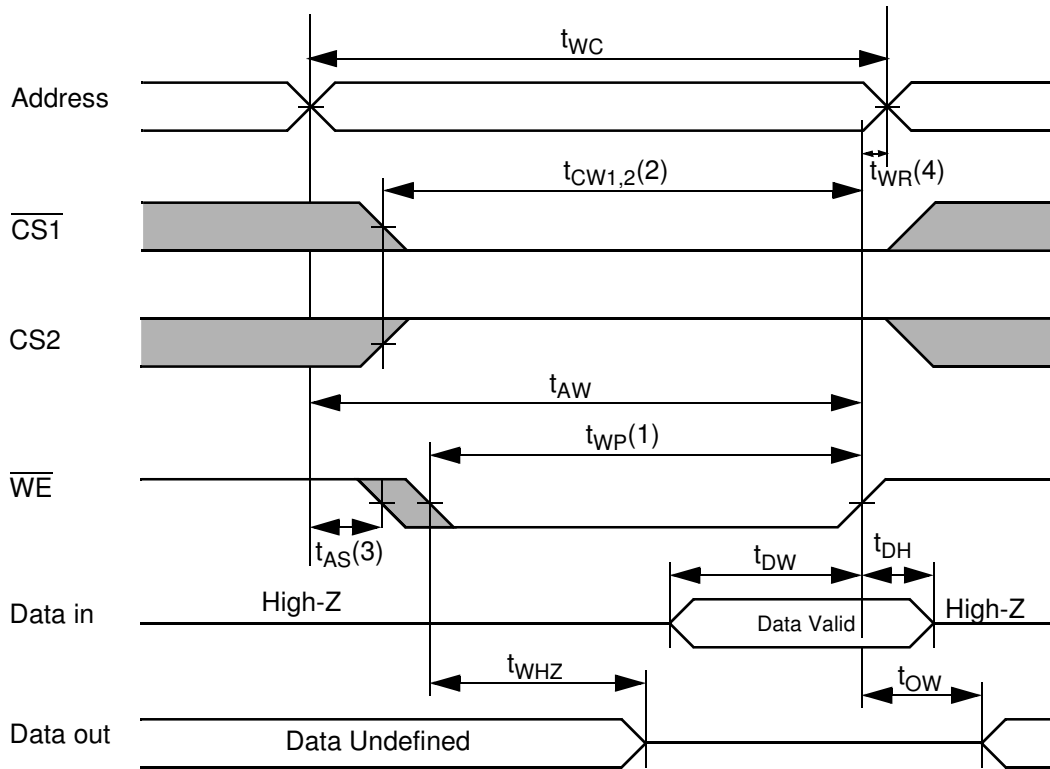

**TIMING WAVEFORM OF WRITE CYCLE(2) ( $\overline{CS1}$  CONTROLLED)**

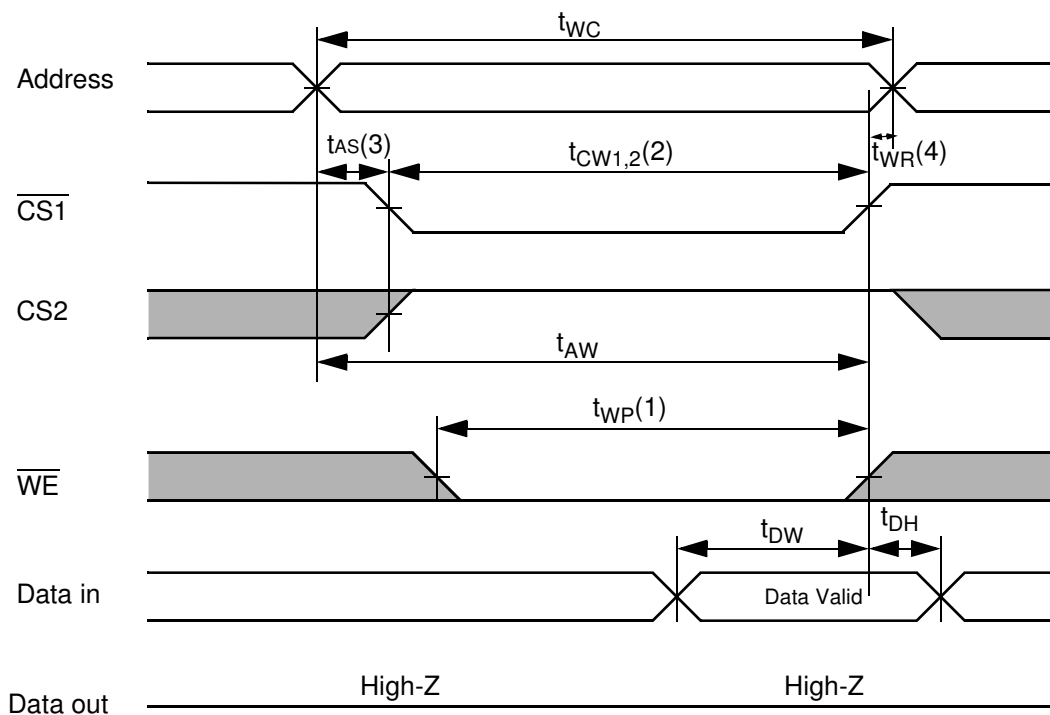

**TIMING WAVEFORM OF WRITE CYCLE(3) (CS2 CONTROLLED)**

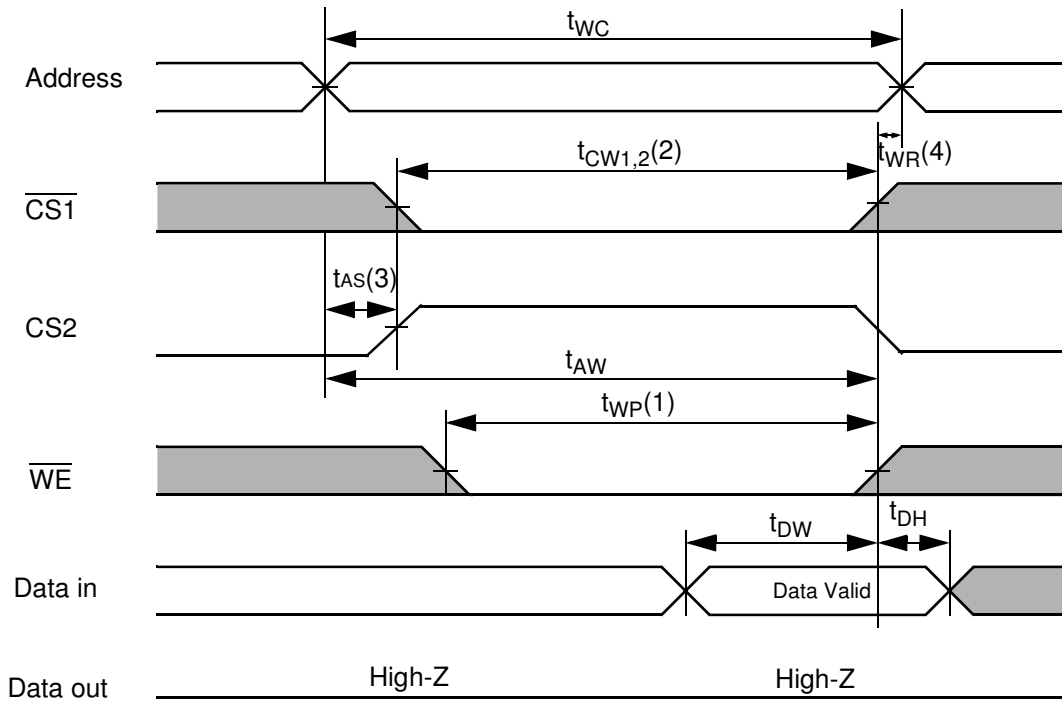

**NOTES (WRITE CYCLE)**

1. A write occurs during the overlap( $t_{WP}$ ) of low  $\overline{CS1}$ , a high CS2 and low  $\overline{WE}$ . A write begins at the latest transition among  $\overline{CS1}$  goes low, CS2 goes high and  $\overline{WE}$  goes low. A write ends at the earliest transition among  $\overline{CS1}$  goes high, CS2 goes low and  $\overline{WE}$  goes high. The  $t_{WP}$  is measured from the beginning of write to the end of write.
2.  $t_{CW}$  is measured from the  $\overline{CS1}$  going low or CS2 going high to end of write.
3.  $t_{AS}$  is measured from the address valid to the beginning of write.
4.  $t_{WR}$  is measured from the end of write to the address change.  $t_{WR}$  applied in case a write ends as  $\overline{CS1}$  or  $\overline{WE}$  going high or CS2 going low.




**DATA RETENTION CHARACTERISTICS**

Parameter	Symbol	Test Condition	Min	Typ <sup>2)</sup>	Max	Unit
V <sub>CC</sub> for Data Retention	V <sub>DR</sub>	I <sub>SB1</sub> Test Condition (Chip Disabled) <sup>1)</sup>	1.5	-	3.3	V
Data Retention Current	I <sub>DR</sub>	V <sub>CC</sub> =1.5V, I <sub>SB1</sub> Test Condition (Chip Disabled) <sup>1)</sup>	-	0.5	5.0	μA
Chip Deselect to Data Retention Time	t <sub>SDR</sub>	See data retention wave form	0	-	-	ns
Operation Recovery Time	t <sub>RDR</sub>		t <sub>RC</sub>	-	-	


**NOTES**

1. See the I<sub>SB1</sub> measurement condition of data sheet page 4.
2. Typical value is measured at T<sub>A</sub>=25°C and not 100% tested.

**DATA RETENTION WAVE FORM**

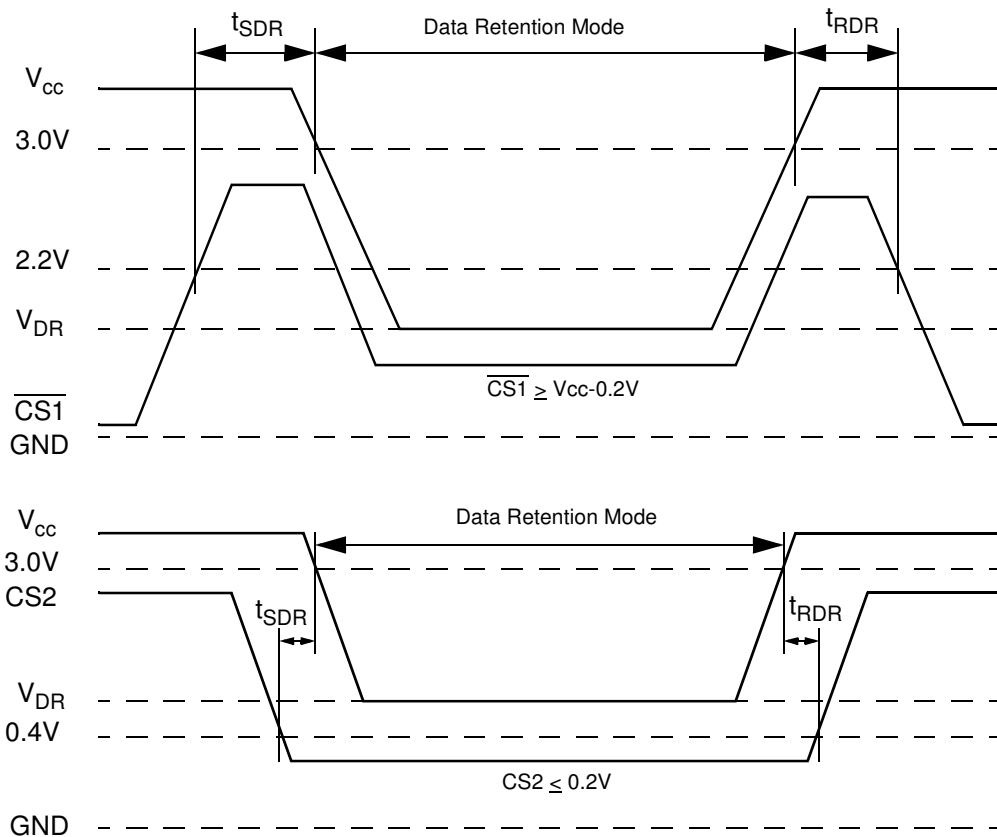

**SRAM PART CODING SYSTEM**

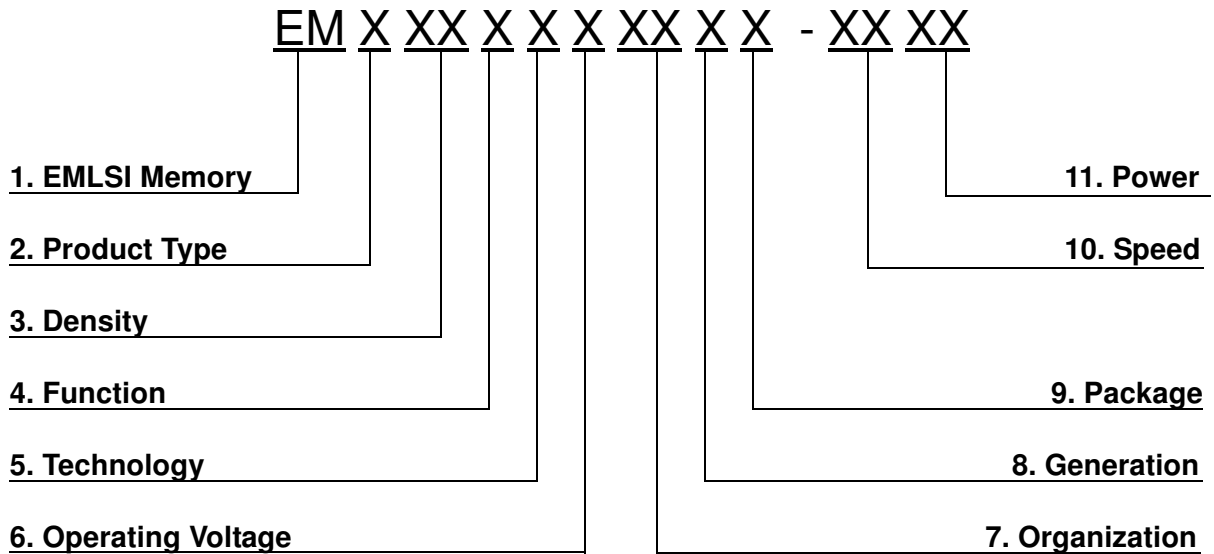

**1. Memory Component**  
EM ----- Memory

**2. Product Type**  
6 ----- SRAM

**3. Density**  
1 ----- 1M  
2 ----- 2M  
4 ----- 4M  
8 ----- 8M

**4. Function**  
0 ----- Dual CS  
1 ----- Single CS  
2 ----- Multiplexed  
3 ----- Single CS / LBB, UBB(tBA=tOE)  
4 ----- Single CS / LBB, UBB(tBA=tCO)  
5 ----- Dual CS / LBB, UBB(tBA=tOE)  
6 ----- Dual CS / LBB, UBB(tBA=tCO)

**5. Technology**  
F ----- Full CMOS

**6. Operating Voltage**  
T ----- 5.0V  
V ----- 3.3V  
U ----- 3.0V  
S ----- 2.5V  
R ----- 2.0V  
P ----- 1.8V

**7. Organization**  
8 ----- x8 bit  
16 ----- x16 bit

**8. Generation**  
Blank ----- 1st generation  
A ----- 2nd generation  
B ----- 3rd generation  
C ----- 4th generation  
D ----- 5th generation  
E ----- 6th generation  
F ----- 7th generation  
G ----- 8th generation

**9. Package**  
Blank ----- KGD, 48&36FpBGA  
S ----- 32 sTSOP1  
T ----- 32 TSOP1  
U ----- 44 TSOP2  
V ----- 32 TSOP

**10. Speed**  
45 ----- 45ns  
55 ----- 55ns  
70 ----- 70ns  
85 ----- 85ns  
10 ----- 100ns  
12 ----- 120ns

**11. Power**  
LL ----- Low Low Power  
LF ----- Low Low Power(Pb-Free & Green)  
L ----- Low Power  
S ----- Standard Power