

- Highly stable CMOS TCXO with ultra-low supply current
- Industry-standard SMD package
- Consumes less than 4mA at 20.0MHz with 3.3V supply
- Low phase noise
- RoHS compliant



### DESCRIPTION

EM62K TCXOs and VCTCXOs are packaged in a 11.4 x 9.6 x 2.5mm ceramic SMD package. The part offers the stability of a TCXO and the design convenience of HCMOS output with ultra-low current consumption.

### SPECIFICATION

Product Code	TCXO: EM62K VCTCXO: VEM62K
Frequency Range:	12.8MHz to 26.0MHz
Output Waveform:	HCMOS
Initial Calibration Tolerance:	$\leq \pm 2.0\text{ppm}$ at $+25^\circ \pm 2^\circ\text{C}$
Standard Frequencies:	12.8, 13.0, 14.4, 15.36, 16.0, 16.384, 16.8, 19.2, 19.44, 19.68, 20.0 and 26.0MHz (Partial list.)
Operating Temperature Range:	See table
Frequency Stability	See table
vs. Temperature	$\pm 1.0$ ppm max. first year
vs. Ageing:	$\pm 1.0$ ppm max. $\pm 10\%$ change
vs. Voltage Change:	$\pm 0.3$ ppm max. $\pm 10\%$ change
vs. Load Change:	$\pm 1.0\text{ppm}$ max. for one reflow (Measured after 24 hours)
vs. Reflow (SMD type):	$\pm 2.8, 3.0$ or $3.3$ Volts
Supply Voltage:	See table
Current Consumption:	See table
Output Logic Levels:	See table
Rise and Fall Times:	4ns typical with 15pF load
Duty Cycle:	$50\% \pm 5\%$
Start-up Time:	5ms typical, 10ms max.
Output Load:	15pF
Fanout (drive capability):	12mA typical, 17mA max. (at TTL level)
RMS Period Jitter:	3ps max. (1 Sigma, 1000 samples; capacitive coupling between Vdd and Ground).
RoHS Status:	RoHS compliant and pB free
Packaging:	16mm tape, 8mm pitch 1000 pieces per reel.

### CURRENT CONSUMPTION


Frequency	Input Voltage		
	+2.8V	+3.0V	+3.3V
12.800MHz	2.3mA typ.	2.4mA typ.	2.6mA typ.
13.000MHz	2.5mA typ.	2.6mA typ.	2.8mA typ.
14.400MHz	2.6mA typ.	2.8mA typ.	3.1mA typ.
16.384MHz	2.8mA typ.	3.0mA typ.	3.2mA typ.
19.200MHz	3.2mA typ.	3.3mA typ.	3.6mA typ.
19.440MHz	3.2mA typ.	3.4mA typ.	3.7mA typ.
20.000MHz	3.2mA typ.	3.4mA typ.	3.7mA typ.
26.000MHz	3.6mA typ.	3.8mA typ.	4.1mA typ.

### FREQUENCY STABILITY OVER TEMPERATURE

Stability (ppm)		$\pm 1.0$	$\pm 2.0$	$\pm 2.5$	$\pm 3.0$	$\pm 4.0$	$\pm 5.0$
Temp. Range (°C)	0 ~ +50	✓	✓	✓	✓	✓	✓
	-10 ~ +60	ASK	✓	✓	✓	✓	✓
	-20 ~ +70	X	✓	✓	✓	✓	✓
	-30 ~ +75	X	✓	✓	✓	✓	✓
	-40 ~ +85	X	X	X	ASK	ASK	✓

✓ = available, x = not available, ASK = call Technical Sales

### OUTLINES AND DIMENSIONS

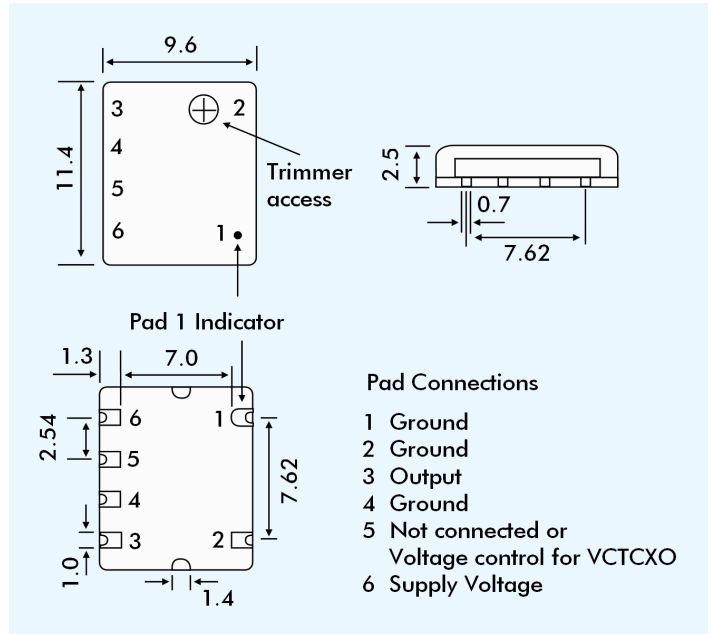

### VEM62K VOLTAGE CONTROL SPECIFICATION

Control Voltage:	$\pm 5$ to $\pm 12\text{ppm}$ for $+1.5 \pm 1.5$ Volts
Slope Polarity:	Positive (increase of control voltage increases output frequency.)
Linearity:	6% typical, 10% maximum

### SSB PHASE NOISE at 25°C

Offset		100Hz	1kHz	10kHz	100kHz	1MHz
Part = VEM62K30	at 13.000MHz (dBc/Hz)	-80	-110	-130	-135	-142

### PART NUMBER FORMAT

Example:

Series Description  
TCXO = EM62K  
VCTCXO = VEM62K  
Supply Voltage  
28=2.8V, 30=3.0V, 33=3.3VDC  
Frequency (MHz)  
Stability over OTR ( $\pm\text{ppm}$ )  
Operating Temperature Range (OTR)  
Lower and upper limits (°C)

**EM62K33-20.000-2.5/-30+75**

