



義隆電子股份有限公司
ELAN MICROELECTRONICS CORP.

EM78P808

8-BIT OTP MICRO-CONTROLLER

Version 3.3

ELAN MICROELECTRONICS CORP.
No. 12, Innovation 1st RD., Science-Based Industrial Park
Hsin Chu City, Taiwan
TEL: (03) 5639977
FAX: (03) 5630118



Version History

Specification Revision History		
Version	Content	Release Date
EM78808 ICE		
1.0	Initial version	2001/02/09
1.1	1. Add LCD 24x72 option 2. Change STACK layers from 16 to 32	2001/06/12
1.3	1. Add Schmitt trigger transition curve for DTMF receiver 2. Remove SPI 32.768kHz spec. 3. Update application circuit	2001/08/08
EM78808		
1.0	Initial version	2001/08/30
2.0	Add SPI 32.768k clock spec. Add 2.0V ref. circuit to Comparator	2001/09/06
2.1	Add Stack Pointer Update CODE Option Register	2001/11/19
2.2	Add Short Message receiver Update IOCE PAGE2 Update CODE Option Register	2001/11/21
2.3	Update IOC5 PAGE2 Update RE PAGE0 bit4	2001/12/4
2.4	Update Application Note	2001/12/18
2.5	Update DC electronic character Update Application Note Update package type	2002/4/25
3.0	Add DED Function	
3.1	Modify PAD option Modify DED function Add BAQ,BBQ package	
3.2	Remove Idle mode Add application note item 7	2004/8/1
3.3	Modify code option	2005/1/1



User Application Note

1. ROM, OTP, ICE

ROM	OTP	ICE
EM78808	EM78P808	EM78808 ICE

2. The difference between EM78R808 and EM78P808 are listed in the table

	EM78R808A	EM78P808	EM78808
Comparator reference voltage	VDD	VDD or 2V	VDD or 2V
Stack pointer	X	O	X
Data ROM max access frequency	10.74 MHz	10.74MHz	3.58 MHz

3. For accessing data ROM, EM78P808 (OTP) can work at 10.74MHz, but please note that ROM type EM78808 only can work at 3.58MHz

4. While switching main clock (regardless of high freq to low freq or on the other hand), adding 6 instructions delay (NOP) is required.

5. For DATA ROM or DATA RAM least address(A0~A7), when using “INC” instruction and overflow occur, the middle address will auto_increase. If using “DEC” instruction and least address from 0x00→0xFF, the middle address can’t auto_decrease.

6. Please do not switch MCU operation mode from normal mode to sleep mode directly. Before into idle or sleep mode, please switch MCU to green mode.

7. Please always keep RA page0 bit7 = 0 or un-expect error will happen!!



I. General Description

The EM78P808 is an 8-bit CID (Call Identification) RISC type microprocessor with low power, high speed CMOS technology. There are 32Kx13 bits Electrical One Time Programmable Read Only Memory (OTP-ROM) within it. Integrated onto a single chip are on chip watchdog (WDT), RAM, program ROM, data ROM, programmable real time clock/counter, external/internal interrupt, power down mode, LCD driver, FSK decoder, Call waiting decoder, Energy Detector (DED), DTMF receiver, Programming Tone generator, build-in KEY TONE clock generation, Comparator and tri-state I/O. The EM78P808 provides a single chip solution to design a CID of calling message display.

II. Feature

➤ CPU

- Operating voltage range : 2.2V~5.5V(Normal mode), 2.0V~5.5V(Green mode)
- 32Kx13 on chip Program Electrical One Time Programmable Read Only Memory (OTP-ROM)
- 256Kx8 on chip data ROM (2.5V ~ 5.5V for main clock 3.5826MHz)
- 8Kx8 on chip data RAM
- 144 byte working register
- Up to 51 bi-directional tri-state I/O ports (32 shared with LCD Segment pins)
- IO with internal Pull high, wake-up and interrupt functions
- STACK: 32 level stack for subroutine nesting
- TCC: 8-bit real time clock/counter (TCC) with 8-bit prescaler
- COUNTER1: 8-bit counter with 8-bit prescaler can be an interrupt source
- COUNTER2: 8-bit counter with 8-bit prescaler can be an interrupt source
- Watch Dog : Programmable free running on chip watchdog timer
- CPU modes:

Mode	CPU status	Main clock	32.768kHz clock status
Sleep mode	Turn off	Turn off	Turn off
Green mode	Turn on	Turn off	Turn on
Normal mode	Turn on	Turn on	Turn on

- 13 interrupt source , 8 external , 5 internal
- Key Scan : Port key scan function up to 16x4 keys
- Sub-Clock: 32.768KHz crystal
- Main-clock: 3.5862MHz multiplied by 0.25, 0.5, 1 or 3 generated by internal PLL
- Key tone output :4KHz, 2KHz ,1KHz (shared with IO)
- Comparator: 3-channel comparators: internal (16 level) or external reference voltage. (shared with IO)
- Serial Peripheral Interface (SPI): Interrupt flag available for the read buffer full, Programmable baud rates of communication, Three-wire synchronous communication. (shared with IO)
- An OP inside (shared with IO)

➤ Current D/A

- Operation Voltage : 2.5V 5.5V
- 7-bit resolution and 3-bit output level control
- Current DA output can drive speaker through a transistor for sound playing. (shared with IO)

➤ Programmable Tone Generators

- Operation Voltage 2.2V 5.5V
- Programmable Tone1 and Tone2 generators
- Independent single tone generation for Tone1 and Tone2
- Mixed dual tone generation by Tone1 and Tone2 with 2dB difference
- Can be programmed for DTMF tone generation
- Can be programmed for FSK signal (Bell202 or V.23) generation

➤ CID

- Operation Voltage 2.7V 5.5V for FSK
- Operation Voltage 2.7V 5.5V for DTMF receiver



- Compatible with Bellcore GR-30-CORE (formerly as TR-NWT-000030)
- Compatible with British Telecom (BT) SIN227 & SIN242
- FSK demodulator for Bell 202 and ITU-T V.23 (formerly as CCITT V.23)

➤ **CALL WAITING**

- Operation Voltage 2.6V 5.5V
- Compatible with Bellcore special report SR-TSV-002476
- Call-Waiting (2130Hz plus 2750Hz) Alert Signal Detector
- Good talkdown and talkoff performance
- Sensitivity compensated by adjusting input OP gain

➤ **LCD (8x80, 9x80, 16x80, 24x72)**

- Maximum common driver pins : 16/24
- Maximum segment driver pins : 80(SEG0..SEG79)/72(SEG8..SEG79)
- Shared COM16 ~ COM23 pins with SEG0 ~ SEG7 pins
- 1/4 bias for 8, 9 and 16 common mode and 1/5 bias for 24 common mode
- 1/8, 1/9, 1/16, 1/24 duty
- 16 Level LCD contrast control (software)
- Internal resistor circuit for LCD bias
- Internal voltage follower for better display

➤ **Package type**

- 136 pin Chip : EM78P808AH
- 128 pin QFP : (EM78P808AAQ , POVD disable) (EM78P808ABQ , POVD enable)
- 128 pin QFP : (EM78P808BAQ , POVD disable) (EM78P808BBQ , POVD enable)

III. Application

1. adjunct units
2. answering machines
3. feature phones

[illegible]

Fig.1.1 Pin assignment (136-Pin die)

EM78P808AAQ , EM78P808ABQ

Fig.1.2 Pin assignment (128-Pin QFP)

EM78P808BAQ, EM78P808BBQ

** This specification is subject to change without notice.*

OTP writer PIN NAME	MASK ROM PIN NAME	P.S.
1.VDD	VDD,AVDD	
2.VPP	/RESET	
3.DINCK	P77	
4.ACLK	P76	
5.PGM	P75	
6.OE	P74	
7.DATA	P73	
8.GND	VSS,AVSS,TEST	
9.ROMSEL	P72	

V.Functional Block Diagram

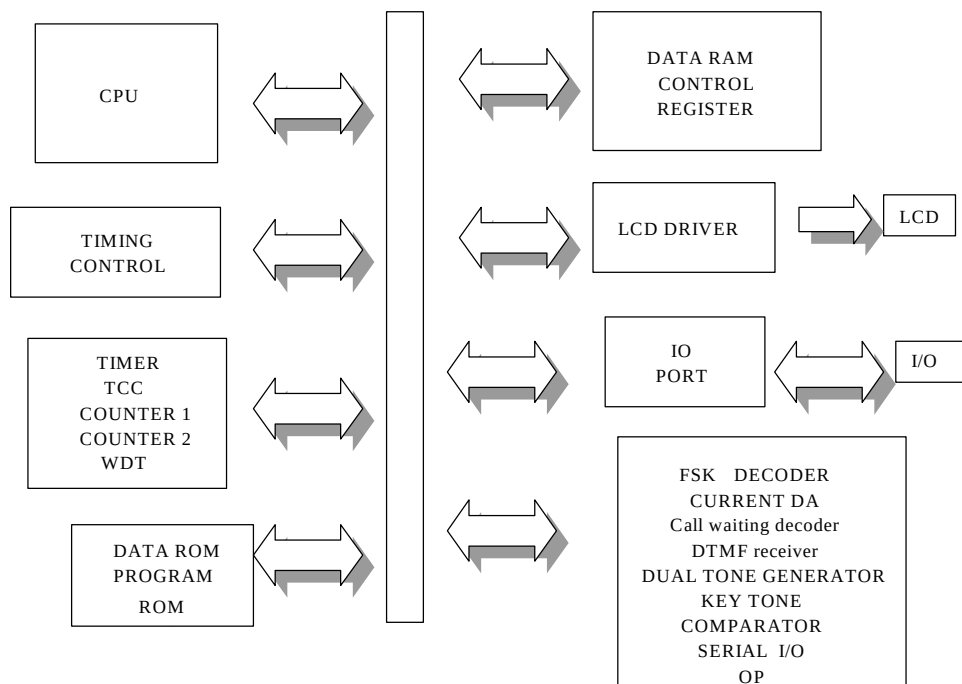


Fig.2 Block diagram1

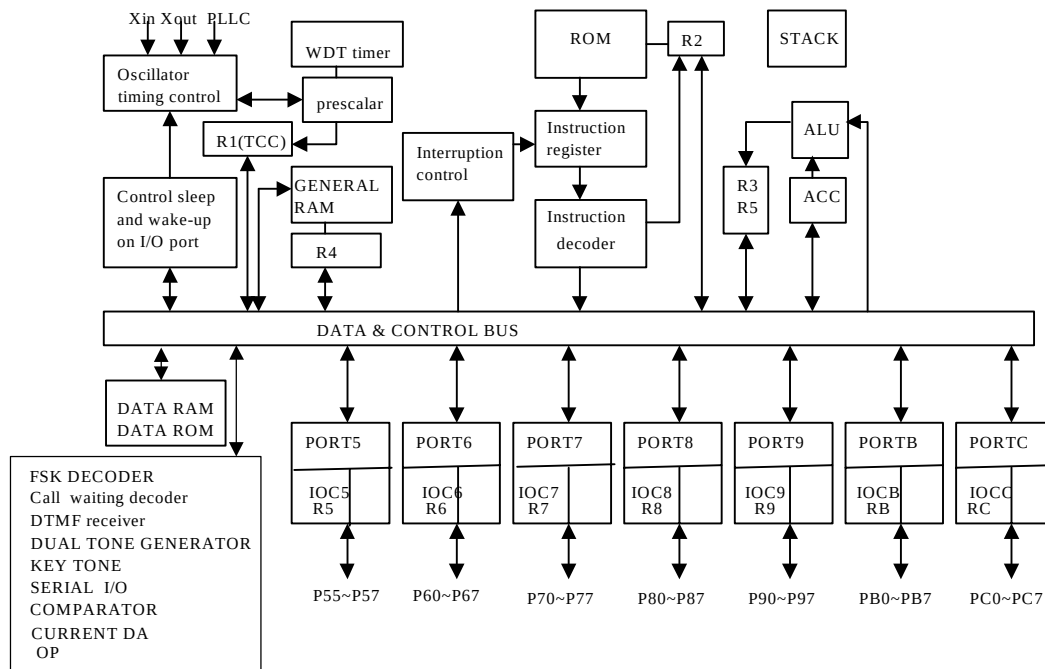


Fig.3 Block diagram2

VI.Pin Descriptions

PIN	I/O	DESCRIPTION
POWER		
VDD AVDD	POWER	Digital power Analog power They connect together when package as 128 pin QFP.
GND AVSS	POWER	Digital ground Analog ground They connect together when package as 128 pin QFP.
CLOCK		
XIN	I	Input pin for 32.768 kHz oscillator
XOUT	O	Output pin for 32.768 kHz oscillator
PLLC	I	Phase loop lock capacitor, connect a capacitor 0.01u to 0.047u with GND
LCD		
COM0..COM15	O	Common driver pins of LCD drivers
SEG0..SEG7 SEG8...SEG47 SEG48..SEG55 SEG56..SEG63 SEG64..SEG71 SEG72..SEG79	O(COM16..COM23) O O (I/O : PORTB) O (I/O : PORTC) O (I/O : PORT8) O (I/O : PORT9)	Segment driver pins of LCD drivers SEG0 to SEG7 are shared with COM16 to COM23 SEG48 to SEG79 are shared with IO PORT.
VC1..VC5	I	Reference voltage input. Each one connect a capacitor (0.1u) with GND.
FSK , TONE , KTONE		
TIP	I	Should be connected with TIP side of twisted pair lines for FSK.

* This specification is subject to change without notice.



RING	I	Should be connected with RING side of twisted pair lines for FSK.
TONE	O	Dual tone output pin
KTONE	O (PORT67)	Key tone output. Shared with PORT67.
CW		
CWGS	O	Gain adjustment of single-ended input OP Amp
CWIN	I	Single-ended input OP Amp for call waiting decoder
DTMF receiver		
EST	O	Early steering output. Presents a logic high immediately when the digital algorithm detects a recognizable tone-pair (signal condition). Any momentary loss of signal condition will cause EST to return to a logic low. This pin shared with PORT56.
STGT	I/O	Steering input/guard time output (bi-directional). A voltage greater than V _{tst} detected at ST causes the device to register the detected tone-pair and update the output latch. A voltage less than V _{tst} frees the device to accept a new tone-pair. The GT output acts to reset the external steering time-constant; its state is a function of EST and the voltage on ST . This pin shared with PORT55.
OP		
OP-	I (PORT55)	The negative Vin input pin of the OP. This pin shared with PORT55.
OP+	I (PORT56)	The positive Vin input pin of the OP. This pin shared with PORT56.
OPO	O (PORT57)	The output of OP. This pin shared with PORT57.
SERIAL IO		
SCK	IO (PORT60)	Master: output pin, Slave: input pin. This pin shared with PORT60.
SDO	O (PORT61)	Output pin for serial data transferring. This pin shared with PORT61.
SDI	I (PORT62)	Input pin for receiving data. This pin shared with PORT62.
Comparator		
CMP1	I (PORT63)	Comparator input pins. Shared with PORT63, PORT64 and PORT65.
CMP2	I (PORT64)	
CMP3	I (PORT65)	
CURRENT DA		
DAOUT	O (PORT66)	Current DA output pin. It can be a control signal for sound generating. Shared with PORT66.
IO		
P55 ~ P57	I/O	PORT 5 can be INPUT or OUTPUT port each bit.
P60 ~ P67	I/O	PORT 6 can be INPUT or OUTPUT port each bit. Internal pull high.
P70 ~ P77	I/O	PORT 7 can be INPUT or OUTPUT port each bit. Internal Pull high function. Auto key scan function. Interrupt function.
P80 ~ P87	I/O	PORT 8 can be INPUT or OUTPUT port each bit. Shared with LCD Segment signal.
P90 ~ P97	I/O	PORT 9 can be INPUT or OUTPUT port each bit. Shared with LCD Segment signal.
PB0 ~ PB7	I/O	PORT B can be INPUT or OUTPUT port each bit.



		Shared with LCD Segment signal.
PC0 ~ PC7	I/O	PORT C can be INPUT or OUTPUT port each bit. Shared with LCD Segment signal.
INT0	PORT70..73	Interrupt sources which has the same interrupt flag. Any pin from PORT70 to PORT73 has a falling edge signal, it will generate a interruption.
INT1	PORT74..76	Interrupt sources which has the same interrupt flag. Any pin from PORT74 to PORT76 has a falling edge signal, it will generate a interruption.
INT2	PORT77	Interrupt source. Once PORT77 has a falling edge or rising edge signal (controlled by CONT register), it will generate a interruption.
TEST	I	Test pin into test mode for factory test only. Connect it ground in application.
/RESET	I	Low reset

VII.Functional Descriptions

VII.1 Operational Registers

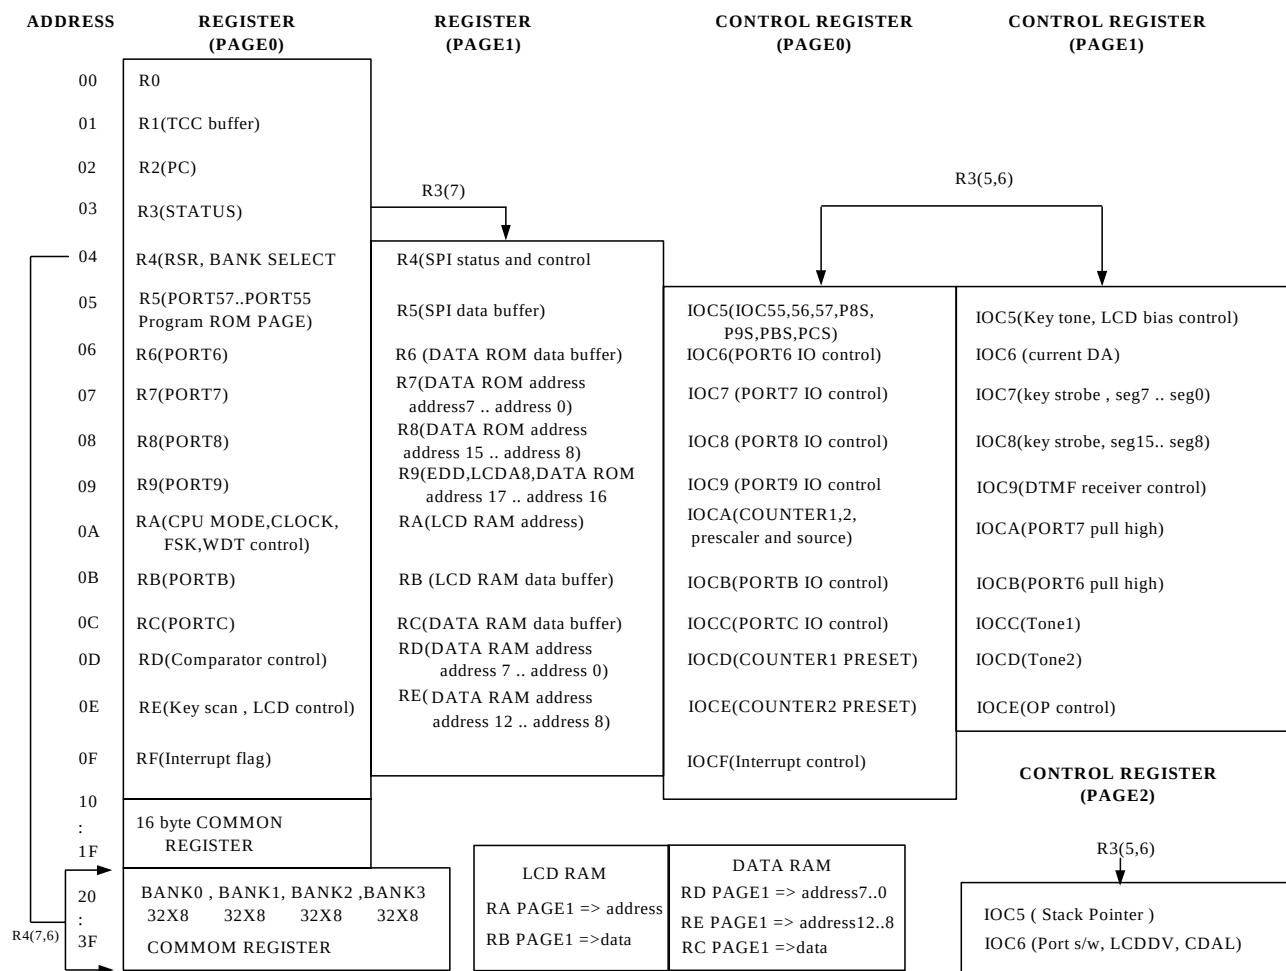


Fig.4 control register configuration

VII.2 Operational Register Detail Description

R0 (Indirect Addressing Register)

R0 is not a physically implemented register. It is useful as indirect addressing pointer. Any instruction using R0 as register actually accesses data pointed by the RAM Select Register (R4).

Example:

```
Mov a,@0x20 ;store a address at R4 for indirect addressing
Mov 0x04,A
Mov a,@0xAA ;write data 0xAA to R20 at bank0 through R0
Mov 0x00,A
```

Written and read by the program as any other register.

If an interrupt trigger, PROGRAM ROM will jump to address8 at page0. The CPU will store ACC,R3 status and R5 PAGE automatically, it will restore after instruction RETI.



Bit 3 (P) : Power down bit.

Set to 1 during power on or by a "WDTC" command and reset to 0 by a "SLEP" command.

Bit 4 (T) : Time-out bit.

Set to 1 by the "SLEP" and "WDTC" command, or during power up and reset to 0 by WDT timeout.

EVENT	T	P	REMARK
WDT wake up from sleep mode	0	0	
WDT time out (not sleep mode)	0	1	
/RESET wake up from sleep	1	0	
Power up	1	1	
Low pulse on /RESET	x	X	x : don't care

Bit 5(IOC PAGE) : change IOC5 ~ IOCE to another page

Please refer to Fig.4 control register configuration for details.

0/1 → page0 / page1

Bit 6(IOC P1S) : change IOC PAGE1 and PAGE2 to another option register

Please refer to Fig.4 control register configuration for details.

0/1 → page1 /page2

Bit 6(IOC P1S)	Bit 5 (IOC PAGE)	PAGE SELECT
X	0	PAGE 0
0	1	PAGE 1
1	1	PAGE 2

Bit 7(PAGE) : change R4 ~ RE to another page

Please refer to Fig.4 control register configuration for details.

0/1 → page0 / page1

R4 (RAM selection for common registers R20 ~ R3F, SPI)

PAGE0 (RAM selection register)

7	6	5	4	3	2	1	0
RB1	RB0	RSR5	RSR4	RSR3	RSR2	RSR1	RSR0

Bit 0 ~ Bit 5 (RSR0 ~ RSR5) : Indirect addressing for common registers R20 ~ R3F

RSR bits are used to select up to 32 registers (R20 to R3F) in the indirect addressing mode.

Bit 6 ~ Bit 7 (RB0 ~ RB1) : Bank selection bits for common registers R20 ~ R3F

These selection bits are used to determine which bank is activated among the 4 banks for 32 register (R20 to R3F)..

Please refer to Fig.4 control register configuration for details.

PAGE1 (SPI control register)

7	6	5	4	3	2	1	0
RBF	SPIE	SRO	SE	SCES	SBR2	SBR1	SBR0

Fig. 6 shows how SPI to communicate with other device by SPI module. If SPI is a master controller, it sends clock through the SCK pin. An 8-bit data is transmitted and received at the same time. If SPI, however, is defined as a slave, its SCK pin could be programmed as an input pin. Data will continue to be shifted on a basis of both the clock rate and the selected edge.

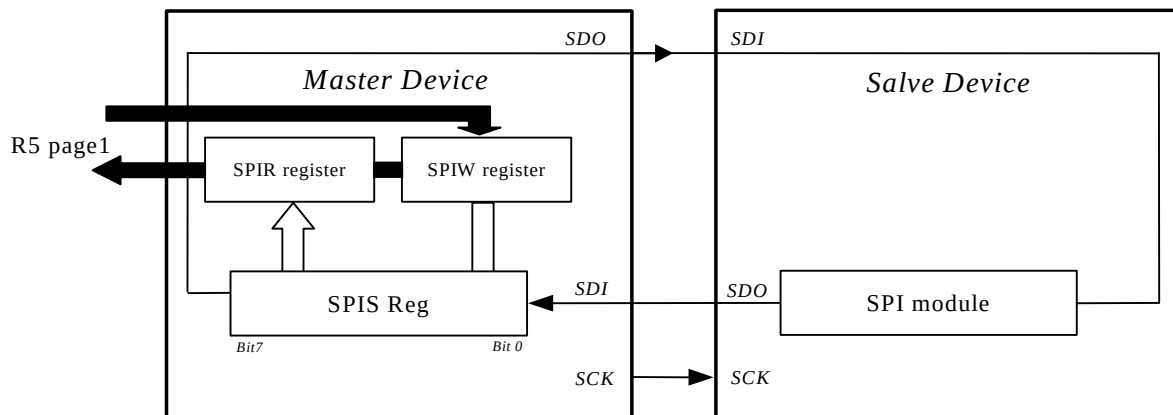


Fig.6 Single SPI Master / Slave Communication

Bit 0 ~ Bit 2 (SBR0 ~ SBR2) : SPI baud rate selection bits

SBR2	SBR1	SBR0	Mode	Baud rate
0	0	0	Master	Fsco
0	0	1	Master	Fsco/2
0	1	0	Master	Fsco/4
0	1	1	Master	Fsco/8
1	0	0	Master	Fsco/16
1	0	1	Master	Fsco/32
1	1	0	Slave	
1	1	1	X	

<Note> Fsco = CPU instruction clock

For example :

If PLL enable and RA PAGE0 (Bit5, Bit4)=(1,1), instruction clock is 3.58MHz/2 → Fsco=3.5862MHz/2

If PLL enable and RA PAGE0 (Bit5, Bit4)=(0,0), instruction clock is 0.895MHz/2 → Fsco=0.895MHz/2

If PLL disable, instruction clock is 32.768kHz/2 → Fsco=32.768kHz/2.

Bit 3 (SCES) : SPI clock edge selection bit

1 → Data shifts out on falling edge, and shifts in on rising edge. Data is hold during the high level.

0 → Data shifts out on rising edge, and shifts in on falling edge. Data is hold during the low level.

Bit 4 (SE) : SPI shift enable bit

1 → Start to shift, and keep on 1 while the current byte is still being transmitted.

0 → Reset as soon as the shifting is complete, and the next byte is ready to shift.

<Note> This bit has to be reset in software.

Bit 5 (SRO) : SPI read overflow bit

1 → A new data is received while the previous data is still being hold in the SPIB register. In this situation, the data in SPIS register will be destroyed. To avoid setting this bit, users had better to read SPIB register even if the transmission is implemented only.

0 → No overflow

<Note> This can only occur in slave mode.

Bit 6 (SPIE) : SPI enable bit

1 → Enable SPI mode

0 → Disable SPI mode

Bit 7 (RBF) : SPI read buffer full flag

-
- The diagram illustrates the internal architecture of the SPI module. It features a central data bus connected to several registers: SPIR reg. (SPI Register), SPIWC (SPI Write Command), SPIW reg. (SPI Write Register), SPIS reg. (SPI Status Register), and SPIC reg. (R4 page1). The SPIR reg. is connected to RBF (Receive Buffer Full) and RBF1 (Receive Buffer Full 1) flags, which are set to 1. The SPIWC is connected to the SPIW reg. via a buffer full detector. The SPIS reg. is connected to the SPIR reg. and the SPIW reg. via a shift right operation. The SPIC reg. (R4 page1) is connected to the SPIR reg. and the SPIW reg. via a shift right operation. The SPI module also includes a prescaler (4, 8, 16, 32, 64, 128) and a clock select (SCK) block. The clock select block is connected to the prescaler and the SPI module. The SPI module is connected to the SPIE (SPI Interrupt Enable) pin, which is also connected to the SPIR reg. and the SPIW reg. The SPI module is also connected to the SDI/P62 and SDO/P61 pins via MUXes. The SPI module is connected to the SCK/P60 pin via a MUX. The SPI module is connected to the TSCO (Test Clock Output) pin via a prescaler and a clock select block. The SPI module is connected to the SCK/P60 pin via a MUX. The SPI module is connected to the SCK/P60 pin via a MUX.

SPIC reg. : SPI control register
SDO/P61 : Serial data out
SDI/P62 : Serial data in
SCK/P60 : Serial clock

RBF : Set by buffer full detector, and reset in software.
RBF1 : Interrupt flag. Set by buffer full detector, and reset in software.
Buffer Full Detector : Sets to 1, while an 8-bit shifting is complete.
SE : Loads the data in SPIW register, and begin to shift
SPIE : SPI control register

SPIS reg. : Shifting byte out and in. The MSB will be shifted first. Both the SPIS register and the SPIW register are loaded at the same time. Once data being written to, SPIS starts transmission / reception. The received data will be moved to the SPIR register, as the shifting of the 8-bit data is complete. The RBF (Read Buffer Full) flag and the RBF1(Read Buffer Full Interrupt) flag are set.

SPIR reg. : Read buffer. The buffer will be updated as the 8-bit shifting is complete. The data must be read before the next reception is finished. The RBF flag is cleared as the SPIR register read.

SPIW reg. : Write buffer. The buffer will deny any write until the 8-bit shifting is complete. The SE bit will be kept in 1 if the communication is still under going. This flag must be cleared as the shifting is finished. Users can determine if the next write attempt is available.

SBR2 ~ SBR0: Programming the clock frequency/rates and sources.

Clock select : Selecting either the internal instruction clock or the external 16.338KHz clock as the shifting clock.

Edge Select : Selecting the appropriate clock edges by programming the SCES bit

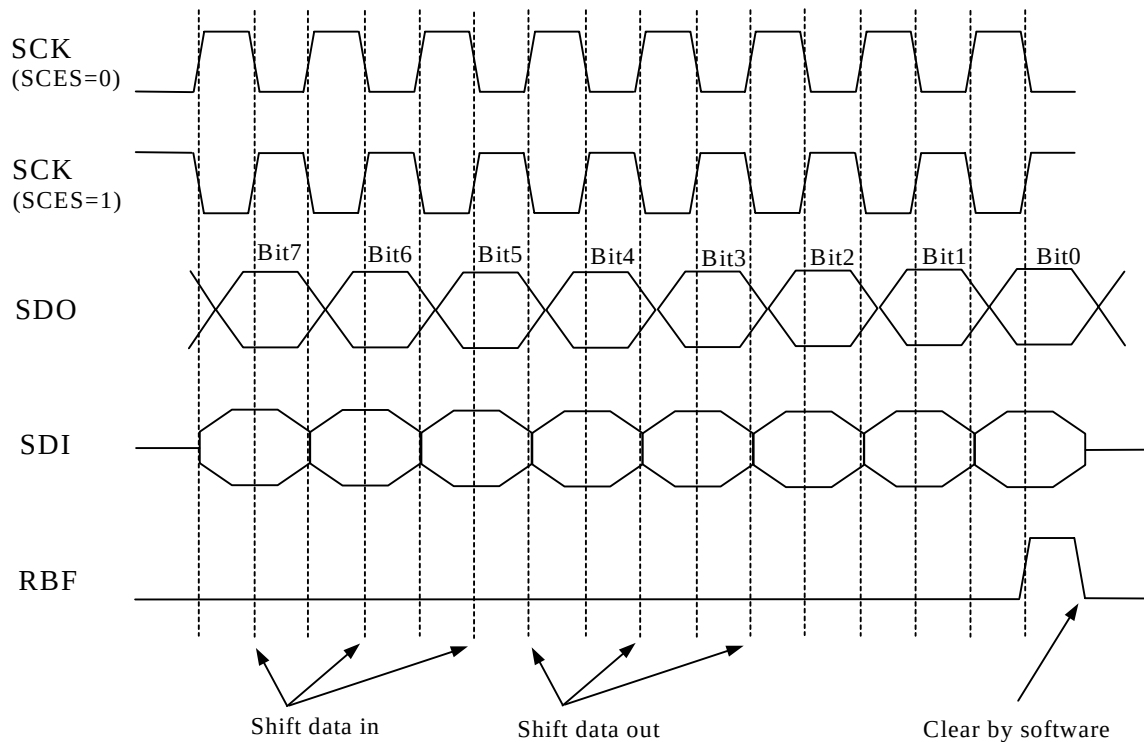


Fig.8 SPI timing

R5 (PORT5 I/O data, Program page selection, SPI data)

PAGE0 (PORT5 I/O data register, Program page register)

7	6	5	4	3	2	1	0
R57	R56	R55	PS4	PS3	PS2	PS1	PS0

Bit 0 ~ Bit 4 (PS0 ~ PS4) : Program page selection bits

PS4	PS3	PS2	PS1	PS0	Program memory page (Address)
0	0	0	0	0	Page 0
0	0	0	0	1	Page 1
0	0	0	1	0	Page 2
0	0	0	1	1	Page 3
:	:	:	:	:	:
:	:	:	:	:	:
1	1	1	1	0	Page 30
1	1	1	1	1	Page 31

User can use PAGE instruction to change page to maintain program page by user. Otherwise, user can use far jump (FJMP) or far call (FCALL) instructions to program user's code. And the program page is maintained by EMC's compiler. It will change user's program by inserting instructions within program.

Bit 5 ~ Bit 7 (P55 ~ P57) : 3-bit PORT5(5~7) I/O data register

User can use IOC register to define input or output each bit.

PAGE1 (SPI data buffer)

7	6	5	4	3	2	1	0
SPIB7	SPIB6	SPIB5	SPIB4	SPIB3	SPIB2	SPIB1	SPIB0

Bit 0 ~ Bit 7 (SPIB0 ~ SPIB7) : SPI data buffer

If you write data to this register, the data will write to SPIW register. If you read this data, it will read the data from SPIR register. Please refer to figure7

R6 (PORT6 I/O data, Data ROM data)

PAGE0 (PORT6 I/O data register)

7	6	5	4	3	2	1	0
P67	P66	P65	P64	P63	P62	P61	P60

Bit 0 ~ Bit 7 (P60 ~ P67) : 8-bit PORT6(0~7) I/O data register

User can use IOC register to define input or output each bit..

PAGE1 (Data ROM data buffer)

7	6	5	4	3	2	1	0
DROM_D7	DROM_D6	DROM_D5	DROM_D4	DROM_D3	DROM_D2	DROM_D1	DROM_D0

Bit 0 ~ Bit 7 (DRD0 ~ DRD7) : Data ROM data buffer for ROM reading.

Example.

```
MOV    A,@1
MOV    R7_PAGE1,A
MOV    A,@0
MOV    R8_PAGE1,A
MOV    A,@0
MOV    R9_PAGE1,A
MOV    A,R6_PAGE1    ;read the data at Data ROM which address is "00001".
```

R7 (PORT7 I/O data, Data ROM address(0~7))

PAGE0 (PORT7 I/O data register)

7	6	5	4	3	2	1	0
P77	P76	P75	P74	P73	P72	P71	P70

Bit 0 ~ Bit 7 (P70 ~ P77) : 8-bit PORT7(0~7) I/O data register

User can use IOC register to define input or output each bit.

PAGE1 (Data ROM address register)

7	6	5	4	3	2	1	0
DROM_A7	DROM_A6	DROM_A5	DROM_A4	DROM_A3	DROM_A2	DROM_A1	DROM_A0

Bit 0 ~ Bit 7 (DRA0 ~ DRA7) : Data ROM address (0~7) for ROM reading

R8 (PORT8 I/O data, Data ROM address(8~15))

PAGE0 (PORT8 I/O data register)

7	6	5	4	3	2	1	0
P87	P86	P85	P84	P83	P82	P81	P80

Bit 0 ~ Bit 7 (P80 ~ P87) : 8-bit PORT8 (0~7) I/O data register

User can use IOC register to define input or output each bit.

PAGE1 (Data ROM address register)

7	6	5	4	3	2	1	0
DROM_A15	DROM_A14	DROM_A13	DROM_A12	DROM_A11	DROM_A10	DROM_A9	DROM_A8



Bit 0 ~ Bit 7 (DRA8 ~ DRA15) : Data ROM address (8~15) for ROM reading

**R9 (PORT9 I/O data, extra LCD address bit, Data ROM address(16~17))
PAGE0 (PORT9 I/O data register)**

7	6	5	4	3	2	1	0
P97	P96	P95	P94	P93	P92	P91	P90

Bit 0 ~ Bit 7 (P90 ~ P97) : 8-bit PORT9 (0~7) I/O data register
User can use IOC register to define input or output each bit.

PAGE1 (LCD address MSB bit, Data ROM address bits)

7	6	5	4	3	2	1	0
LCDA8						DROM_A17	DROM_A16

Bit 0 ~ Bit 1 (DROM_A16 ~ DROM_A17) : Data ROM address(16~17) for ROM reading.

Bit 2 ~ Bit 6 : unused

Bit 7 (LCDA8) : MSB of LCD address for LCD RAM reading or writing
Other LCD address bits LCDA7 ~ LCDA0 are set from RA PAGE1 Bit 7 ~ Bit 0.
For LCD address access over 0xFFH, set this bit to "1"; otherwise set this bit to "0".

RA (CPU power saving, PLL, Main clock selection, FSK, Watchdog timer, LCD address)

PAGE0 (CPU power saving bit, PLL, Main clock selection bits, FSK , Watchdog timer enable bit)

7	6	5	4	3	2	1	0
0	PLLEN	CLK1	CLK0	FSKPWR	FSKDATA	/CD	WDTEN

Bit 0 (WDTEN) : Watch dog control register

User can use WDTC instruction to clear watch dog counter. The counter 's clock source is 32768/2 Hz. If the prescaler assigns to TCC. Watch dog will time out by $(1/32768) * 2 * 256 = 15.616\text{ms}$. If the prescaler assigns to WDT, the time of time out will be more times depending on the ratio of prescaler.

0/1 → disable/enable

Bit 1 (/CD) : FSK carrier detect indication

0/1 → Carrier Valid/CARRIER Invalid

It's a read only signal. If FSK decoder detect the energy of mark or space signal. The Carrier signal will go to low level. Otherwise it will go to high.. Note!! Should be at normal mode.

Bit 2 (FSKDATA) : FSK decoding data output

It's a read only signal. If FSK decode the mark or space signal , it will output high level signal or low level signal at this register. It's a raw data type. That means the decoder just decode the signal and has no process on FSK signal. Note!! Should be at normal mode.

User can use FSK data falling edge interrupt function to help data decoding.

Ex:

```
MOV    A,@01000000
IOW    IOCF          ;enable FSK interrupt function
CLR    RF
ENI          ;wait for FSK data's falling edge
```

:

0 = Space data (2200Hz)

1 = Mark data (1200Hz)

Bit 3 (FSKPWR) : FSK power control

0/1 → FSK decoder powered down / FSK decoder powered up

It's the control register of FSK block power.

The relation between bit 1 to bit 3 is shown in Fig.9. You have to power FSK decoder up first, then wait a setup time (T_{sup}) and check carrier signal ($/CD$). If the carrier is low, program can process the FSK data.

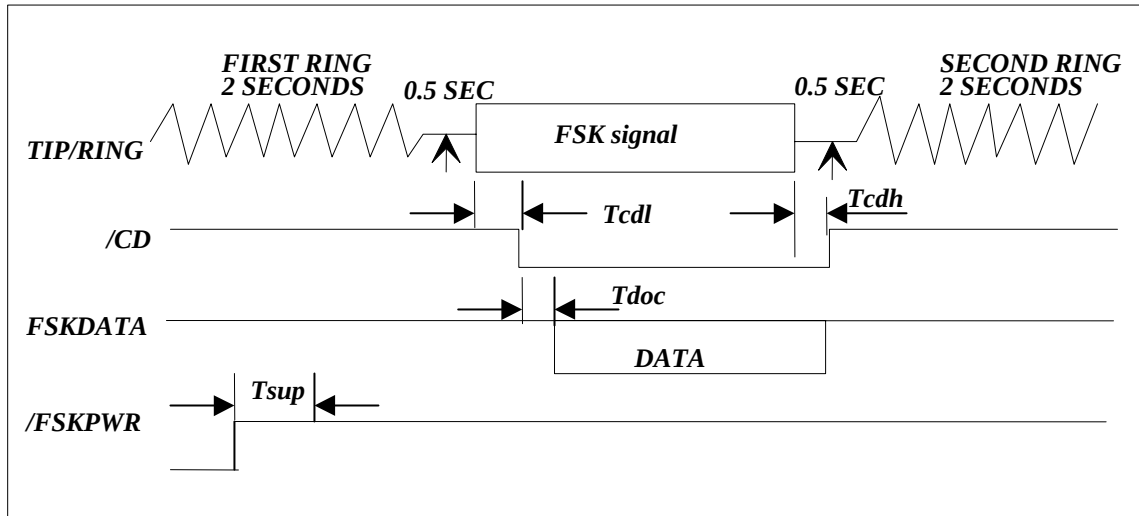


Fig.9 The relation between bit 1 ~ bit 3

The controller is a CMOS device designed to support the Caller Number Deliver feature which is offered by the Regional Bell Operating Companies. The FSK block comprises one path: the signal path. The signal path consist of an input differential buffer, a band pass filter, an FSK demodulator and a data valid with carrier detect circuit.

In a typical application, user can use his own external ring detect output as a triggering input to IO port. User can use this signal to wake up whole chip by external ring detect signal.

By setting "1" to bit 3 (FSKPWR) of register RA to activate the block of FSK decoder. If bit 3 (FSKPWR) of register RA is set to "0", the block of FSK decoder will be powered down.

The input buffer accepts a differential AC coupled input signal through the TIP and RING input and feeds this signal to a band pass filter. Once the signal is filtered, the FSK demodulator decodes the information and sends it to a post filter. The output data is then made available at bit 2 (FSKDATA) of register RA. This data, as sent by the central office, includes the header information (alternate "1" and "0") and 150 ms of marking which precedes the date, time and calling number. If no data is present, the bit 2 (DATA) of register RA is held on "1" state. This is accomplished by an carrier detect circuit which determines if the in-band energy is high enough. If the incoming signal is valid, bit 1 ($/CD$) of register RA will be "0" otherwise it will be held on "1". And thus the demodulated data is transferred to bit 2 (DATA) of register RA. If it is not, then the FSK demodulator is blocked.

Bit 4 ~ Bit 5 (CLK0 ~ CLK1) : Main clock selection bits

User can choose different frequency of main clock by CLK1 and CLK2. All the clock selection is list below.

PLEN	CLK1	CLK0	Sub clock	MAIN clock	CPU clock
1	0	0	32.768kHz	895.658kHz	895.658kHz (Normal mode)
1	0	1	32.768kHz	1.7913MHz	1.7913MHz (Normal mode)
1	1	0	32.768kHz	10.7479MHz	10.7479MHz (Normal mode)
1	1	1	32.768kHz	3.5826MHz	3.5826MHz (Normal mode)
0	Don't care	don't care	32.768kHz	Don't care	32.768kHz (Green mode)
0	Don't care	don't care	32.768kHz	Don't care	32.768kHz (Green mode)

0	Don't care	don't care	32.768kHz	Don't care	32.768kHz (Green mode)
0	Don't care	don't care	32.768kHz	Don't care	32.768kHz (Green mode)

Bit 6 (PLEN) : PLL enable control bit

It is CPU mode control register. If PLL is enabled, CPU will operate at normal mode (high frequency, main clock); otherwise, it will run at green mode (low frequency, 32768 Hz).

0/1 → disable/enable

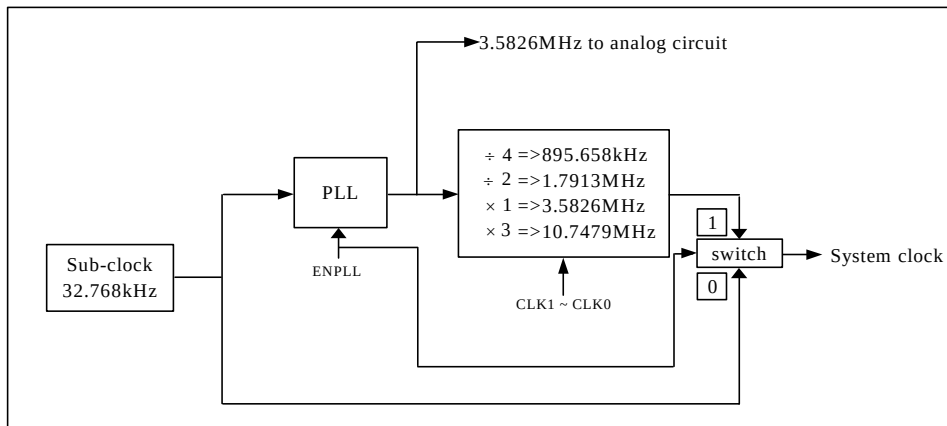


Fig.10 The relation between 32.768kHz and PLL

Bit 7: Unused register. Always keep this bit to 0 or some un-expect error will happen!

The status after wake-up and the wake-up sources list as the table below.

Wakeup signal	SLEEP mode	GREEN mode	NORMAL mode
	RA(7,6)=(0,0) + SLEP	RA(7,6)=(x,0) no SLEP	RA(7,6)=(x,1) no SLEP
TCC time out IOCF bit 0=1 And "ENI"	No function	Interrupt (jump to address 8 at page0)	Interrupt (jump to address 8 at page0)
COUNTER1 time out IOCF bit 1=1 And "ENI"	No function	Interrupt (jump to address 8 at page0)	Interrupt (jump to address 8 at page0)
COUNTER2 time out IOCF bit 2=1 And "ENI"	No function	Interrupt (jump to address 8 at page0)	Interrupt (jump to address 8 at page0)
WDT time out	RESET and Jump to address 0	RESET and Jump to address 0	RESET and Jump to address 0
PORT7 IOCF bit3 or bit4 or bit5 = 1 And "ENI"	RESET and Jump to address 0	Interrupt (jump to address 8 at page0)	Interrupt (jump to address 8 at page0)
Stack overflow IOC5 page2 bit7=1 &bit 6: 0→1 And "ENI"	No function	Interrupt (jump to address 8 at page0)	Interrupt (jump to address 8 at page0)

<Note> Stack overflow interrupt function is exist in ROM less and OTP chip only.

<Note> PORT70 ~ PORT73 's wakeup function is controlled by IOCF bit3 and ENI instruction. They are falling edge trigger.

PORT74 ~ PORT76 's wakeup function is controlled by IOCF bit4 and ENI instruction. They are falling edge trigger.



PORT77's wakeup function is controlled by IOCF bit5 and ENI instruction. It's falling edge or rising edge trigger (controlled by CONT register).

PAGE1 (LCD address)

7	6	5	4	3	2	1	0
LCDA7	LCDA6	LCDA5	LCDA 4	LCDA 3	LCDA 2	LCDA 1	LCDA 0

Bit 0 ~ Bit 7 (LCDA0 ~ LCDA7) : LCD address for LCD RAM reading or writing

The data in the LCD RAM correspond to the COMMON and SEGMENT signals as the table .

COM23 ~ COM16 (set R9 PAGE1 bit7=1)	COM15 ~COM8 (set R9 PAGE1 bit7=0)	COM7 ~ COM0 (set R9 PAGE1 bit7=0)	
Address 100H	Address 80H	Address 00H	SEG0
Address 101H	Address 81H	Address 01H	SEG1
Address 102H	Address 82H	Address 02H	SEG1
:	:	:	:
:	:	:	:
:	:	:	:
Address 14EH	Address CEH	Address 4EH	SEG78
Address 14FH	Address CFH	Address 4FH	SEG79
Address 150H	Address D0H	Address 50H	Empty
:	:	:	:
Address 17FH	Address FFH	Address 7FH	Empty

RB (PORTB I/O data, LCD data)

PAGE0 (PORTB I/O data register)

7	6	5	4	3	2	1	0
PB7	PB6	PB5	PB4	PB3	PB2	PB1	PB0

Bit 0 ~ Bit 7 (PB0 ~ PB7) : 8-bit PORTB(0~7) I/O data register

User can use IOC register to define input or output each bit.

PAGE1 (LCD data buffer)

7	6	5	4	3	2	1	0
LCDD7	LCDD6	LCDD5	LCDD4	LCDD3	LCDD2	LCDD1	LCDD0

Bit 0 ~ Bit 7 (LCDD0 ~ LCDD7) : LCD data buffer for LCD RAM reading or writing

Example.

```
MOV    A,@0
MOV    R9_PAGE1,A
MOV    RA_PAGE1,A      ;ADDRESS
MOV    A,@0XAA
MOV    RB_PAGE1,A      ;WRITE DATA 0XAA TO LCD RAM
MOV    A,RB_PAGE1      ;READ DATA FROM LCD RAM
:
```

RC (PORTC I/O data, Data RAM data)

PAGE0 (PORTC I/O data register)

7	6	5	4	3	2	1	0
PC7	PC6	PC5	PC4	PC3	PC2	PC1	PC0

Bit 0 ~ Bit 7 (PC0 ~ PC7) : 8-bit PORTC(0~7) I/O data register

User can use IOC register to define input or output each bit.

PAGE1 (Data RAM data buffer)

* This specification is subject to change without notice.



7	6	5	4	3	2	1	0
RAMD7	RAMD6	RAMD5	RAMD4	RAMD3	RAMD2	RAMD1	RAMD0

Bit 0 ~ Bit 7 (RAMD0 ~ RAMD7) : Data RAM data buffer for RAM reading or writing.

Ex.

```

MOV    A , @1
MOV    RD_PAGE1 , A
MOV    A , @0
MOV    RE_PAGE1 , A
MOV    A , @0x55
MOV    RC_PAGE1 , A      ;write data 0x55 to DATA RAM which address is "0001".
MOV    A , RC_PAGE1     ;read data
:

```

RD (Comparator control, Data RAM address(0 ~ 7))

PAGE0 (Comparator control bits)

7	6	5	4	3	2	1	0
CMPEN	CMPFLAG	CMPS1	CMPS0	CMP_B3	CMP_B2	CMP_B1	CMP_B0

If user define PORT63 , PORT64 or PORT65 (by CMPIN1, CMPIN2, CMPIN3 at IOCE page1) as a comparator input or PORT6. User can use this register to control comparator's function.

Bit 0~Bit 3(CMP_B0~CMP_B3) : Reference voltage selection of internal bias circuit for comparator.

Reference voltage for comparator = $VDD \times (n + 0.5) / 16$, n = 0 to 15

Bit 4~Bit 5(CMPS0~CMPS1) : Channel selection from CMP1 to CMP3 for comparator

CMPS1	CMPS0	Input
0	0	CMP1
0	1	CMP2
1	0	CMP3
1	1	Reserved

Bit 6(CMPFLAG) : Comparator output flag

0 → Input voltage < reference voltage

1 → Input voltage > reference voltage

Bit 7(CMPEN) : Enable control bit of comparator.

0/1 → disable/enable, When this bit is set to "0", 2.0V ref circuit is also powered off.

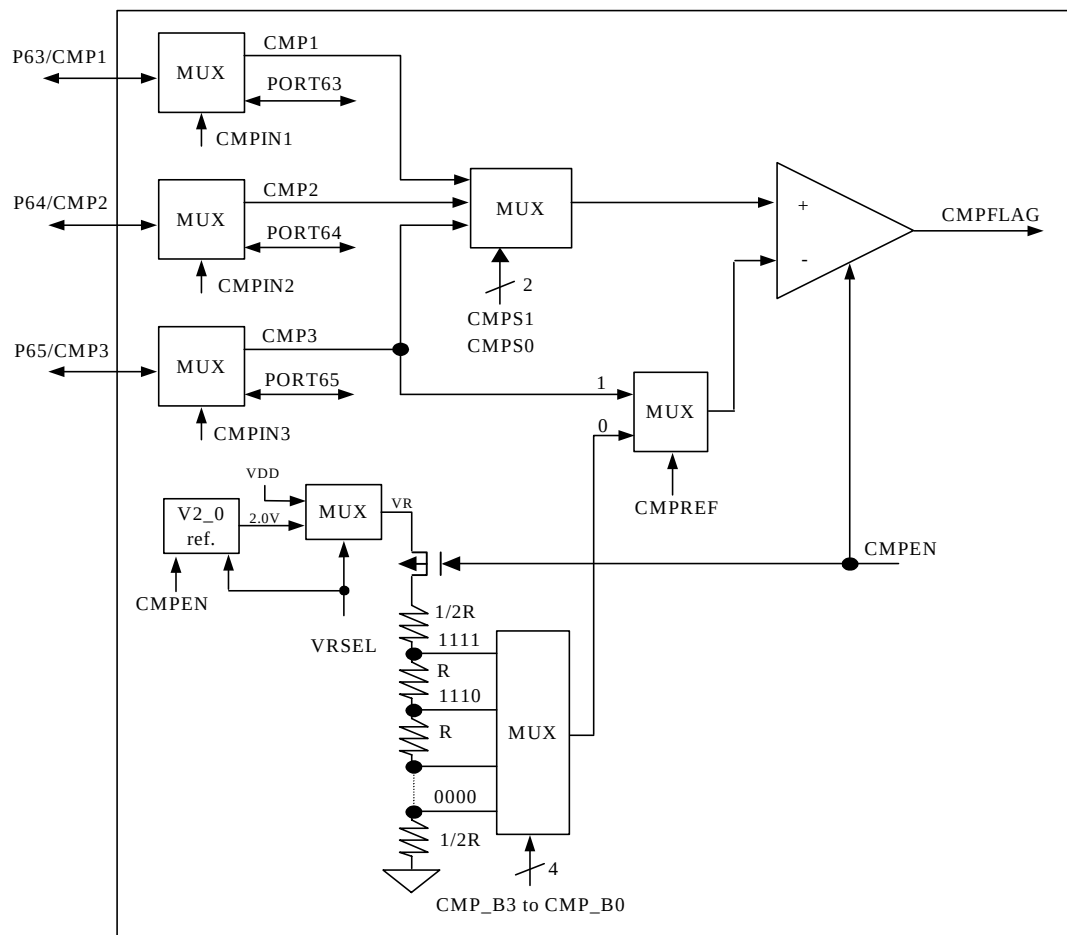


Fig.11 Comparator circuit

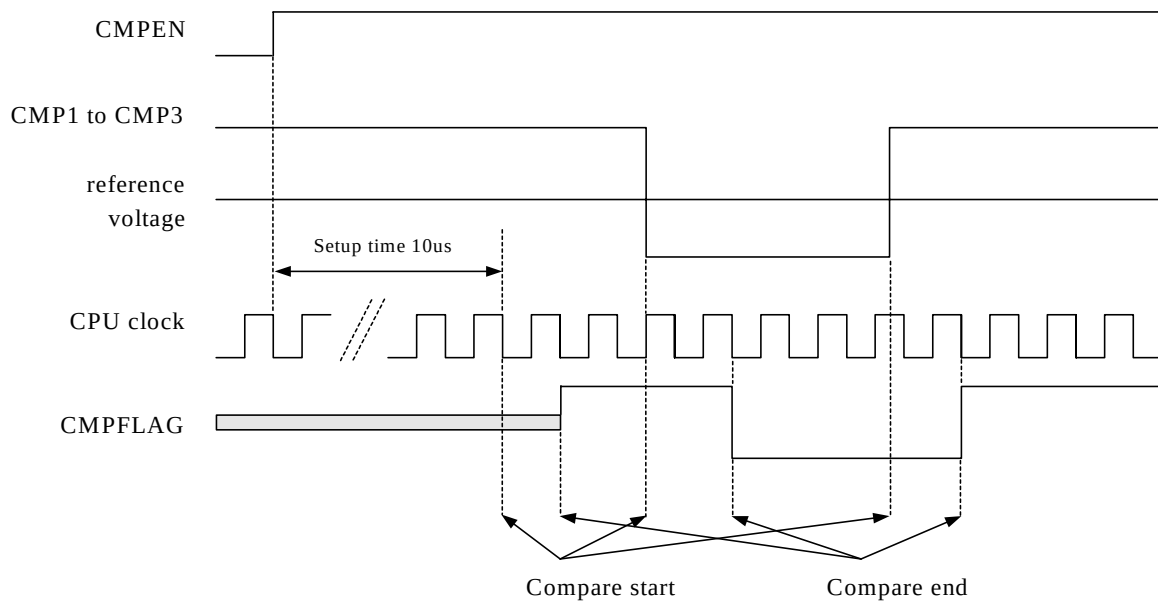


Fig.12 Comparator timing



PAGE1 (Data RAM address0 ~ address7)

7	6	5	4	3	2	1	0
RAMA7	RAMA6	RAMA5	RAMA4	RAMA3	RAMA2	RAMA1	RAMA0

Bit 0~Bit 7(RAMA0~RAMA7) : Data RAM address (address0 to address7) for RAM reading or writing

RE (CAS, Key scan, LCD control, Data RAM address(8 ~ 10))

PAGE0 (Key scan control, LCD control)

7	6	5	4	3	2	1	0
CAS	KEYCHK	KEYSTRB	KEYSCAN	LCD1	LCD0	LCDM1	LCDM0

Bit 0~Bit 1(LCDM0~LCDM1) : LCD common mode, bias select and COM/SEG switch control bits

LCDM1, LCDM0	COM output mode	LCD bias	COM/SEG switch
0,0	16 common	1/4 bias	SEG0 ~ SEG7 select
0,1	9 common	1/4 bias	SEG0 ~ SEG7 select
1,0	8 common	1/4 bias	SEG0 ~ SEG7 select
1,1	24 common	1/5 bias	COM16 ~ COM23 select

<Note> When 8, 9 and 16 LCD common mode is set, COM16/SEG0 pin ~ COM23/SEG7 pin are also set to SEG0 ~ SEG7 and LCD bias is 1/4 bias. When 24 LCD common mode is set, COM16/SEG0 pin ~ COM23/SEG7 pin are also set to COM16 ~ COM23 and LCD bias is 1/5 bias.

Bit 2~Bit 3 (LCD0~LCD1) : LCD operation function definition.

LCD1, LCD0	LCD operation
0,0	Disable
0,1	Blanking
1,0	Reserved
1,1	LCD enable

<Note> Key strobe and Key check functions should be normal operating whenever LCD is enabled or disabled.

The controller can drive LCD directly. LCD block is made up of LCD driver, display RAM, segment output pins, common output pins and LCD operating bias pins.

Duty, the number of segment, the number of common and frame frequency are determined by LCD mode register RE PAGE0 Bit 0~ Bit 1.

When 8, 9 or 16 LCD commons are used, LCD operating bias pins VC1, VC2, VC4 and VC5 need to be connected 0.1uF capacitors to the ground (VC3 is not necessary). When 24 LCD common is used, all LCD operating bias pins VC1 ~ VC5 need to be connected 0.1uF capacitors to the ground.

LCD driver can be controlled as different driving ability (refer to IOC6 PAGE1 Option-B register).

The basic structure contains a timing control which uses the basic frequency 32.768kHz to generate the proper timing for different duty and display access. RE PAGE1 register is a command register for LCD driver and display. The LCD display (disable, enable, blanking) is controlled by RE PAGE0 Bit 2 ~ Bit 3 and the driving duty is decided by RE PAGE Bit 0 ~ Bit 2. LCD display data is stored in data RAM which address and data access controlled by registers R9, RA PAGE1 and RB PAGE1.

User can regulate the contrast of LCD display by IOC5 PAGE1 (BIAS3..BIAS0). Up to 16 levels contrast is convenient for better display. And the internal voltage follower can afford large driving source.

COM signal : The number of COM pins varies according to the duty cycle used, as following:

In 1/8 duty mode COM8 ~ COM15 must be open.

In 1/9 duty mode COM9~ COM15 must be open

In 1/16 duty mode COM0 ~ COM15 pins must be used.

In 1/24 duty mode COM0 ~ COM23 pins must be used.

duty	COM0 ~ COM7	COM8	COM9	..	COM15	COM15 ~ COM23
1/8	o	X	x	..	x	x
1/9	o	O	x	..	x	x
1/16	o	O	o	..	o	x
1/24	o	O	o	..	o	o

x : open, o : select

SEG signal : The segment signal pins are connected to the corresponding display RAM. The high byte to the low byte Bit 0 ~ Bit 7 are correlated to COM0 ~ COM23 respectively . When a bit of display RAM is 1, a select signal is sent to the corresponding segment pin, and when the bit is 0 , a non-select signal is sent to the corresponding segment pin.

Bit 4(KEYSCAN) : Key scan function enable control bit

0/1 → disable/enable

If you enable key scan function LCD waveform will has a small pulse within a period like Fig.13.

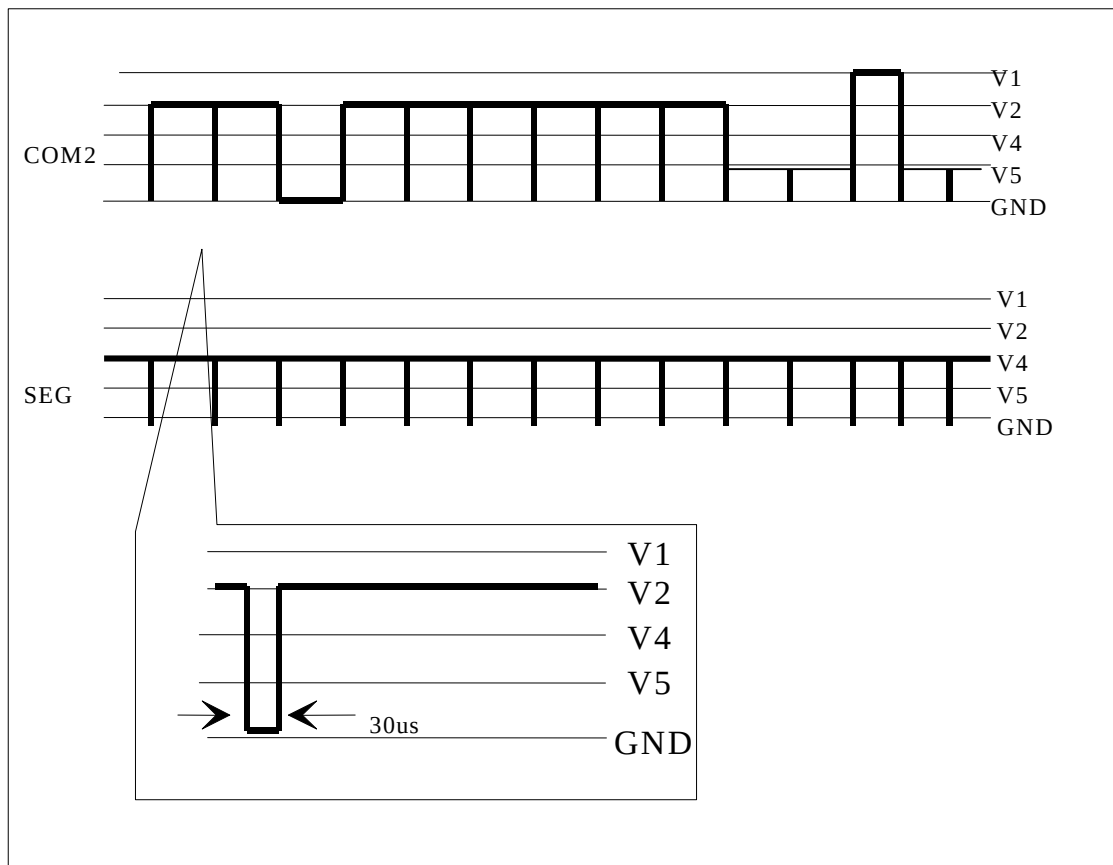


Fig.13. key scan waveform for 1/8, 1/9, 1/16 duty

Bit 5(KEYSTRB) : Key strobe enable control bit

0/1 → disable/enable

key strobe signal , if you set this bit , segment will switch to strobe signal temporally and output zero signal (one instruction long) one by one from segment 8 to segment 23. During one segment strobe time, CPU will check port7(0:3) equal to "1111" or not. If not, CPU will latch a zero at IOC7 PAGE1 and IOC8 PAGE1 one by one depends on which segment strobe.

After strobe, this bit will be cleared . Fig.14 is key strobe signal.

* This specification is subject to change without notice.

One instruction

	REGISTER	IOC7(0)	IOC7(1)	IOC7(2)	IOC7(3)	IOC7(4)	IOC7(5)	IOC7(6)	IOC7(7)	IOC8(0)	IOC8(1)	IOC8(2)	IOC8(3)	IOC8(4)	IOC8(5)	IOC8(6)	IOC8(7)
STROBE																	
SEG8		0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
SEG9		1	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1
SEG10		1	1	0	1	1	1	1	1	1	1	1	1	1	1	1	1
SEG11		1	1	1	0	1	1	1	1	1	1	1	1	1	1	1	1
SEG12		1	1	1	1	0	1	1	1	1	1	1	1	1	1	1	1
SEG13		1	1	1	1	1	0	1	1	1	1	1	1	1	1	1	1
SEG14		1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	1
SEG15		1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1
SEG16		1	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1
SEG17		1	1	1	1	1	1	1	1	1	0	1	1	1	1	1	1
SEG18		1	1	1	1	1	1	1	1	1	1	0	1	1	1	1	1
SEG19		1	1	1	1	1	1	1	1	1	1	0	1	1	1	1	1
SEG20		1	1	1	1	1	1	1	1	1	1	1	0	1	1	1	1
SEG21		1	1	1	1	1	1	1	1	1	1	1	1	0	1	1	1
SEG22		1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	1
SEG23		1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0

Fig.14 key strobe signal

Bit 6(KEYCHK) : Key check enable control bit

0 → disable key check function.

1 → enable key check function. SEG8 to SEG23 will keep low level.

Figure 15 is relationship between KEYSKAN, KEYSTROBE , KETCHECK and segments.

And figure 16 is key scan flow by interrupt trigger.

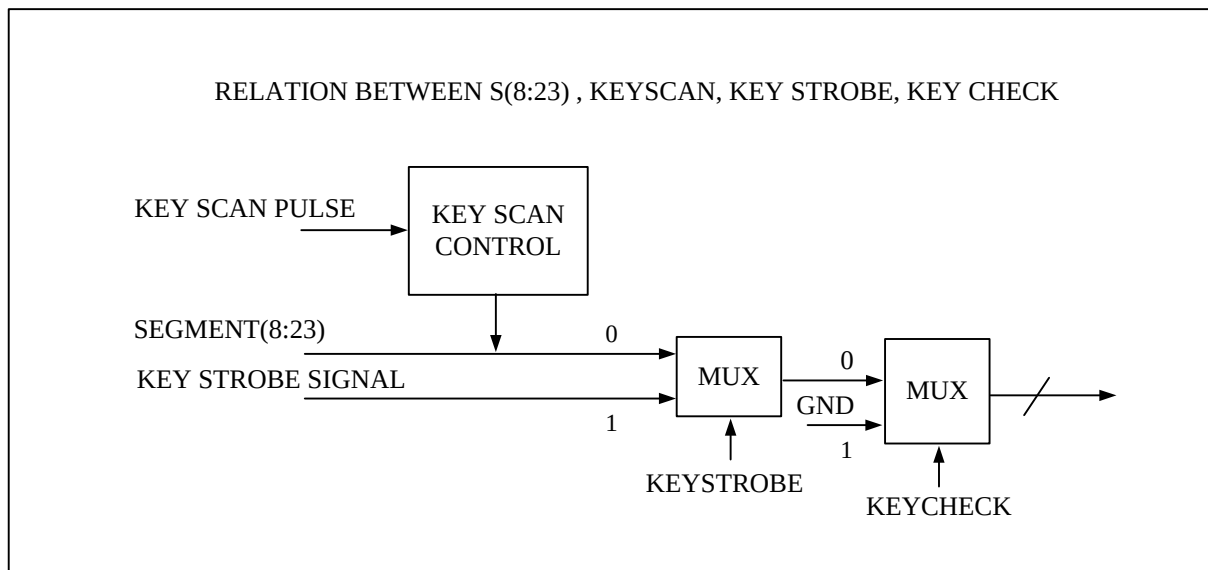


Fig.15 KEYSKAN, KEYSTROBE , KEYCHECK and segments.

Bit 7(CAS) : CALL WAITING decoding output

0/1 → CW data valid / No data

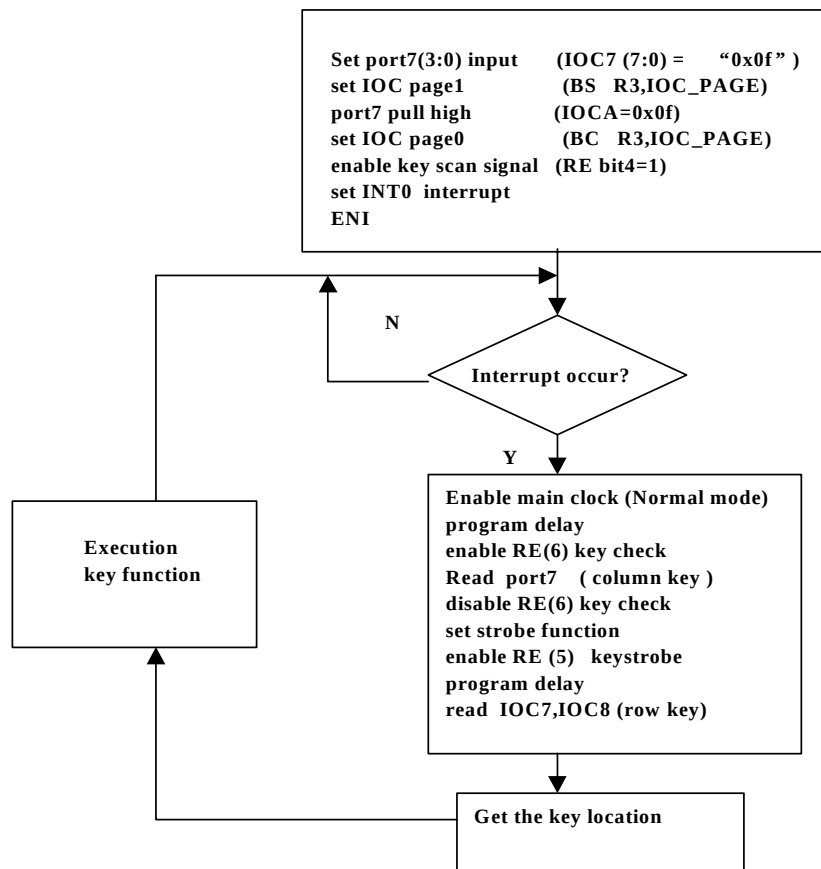


Fig.16 key scan flow by interrupt trigger

PAGE1 (Data RAM address8 ~ address12)

7	6	5	4	3	2	1	0
DEDD	DED	X	RAMA12	RAMA11	RAMA10	RAMA9	RAMA8

Bit 0~Bit 4(RAMA8~RAMA12) : Data RAM address (address8 to address12) for RAM reading.

Bit 6 (DED) : Interrupt flag of Differential Energy Detector (DED) output data

Bit 7 (DEDD) : Output data of Differential Energy Detector (DED) If input signal from EGIN1 and EGIN2 pin to Differential Energy Detector is over the threshold level setting at IOCE PAGE 2 bit 0 (DEDTHD), the DED will extract the zero-crossing pulse waveform corresponding to input signal.

RF (Interrupt flags)

7	6	5	4	3	2	1	0
RBF/SDT	FSK/CW	INT2	INT1	INT0	CNT2	CNT1	TCIF

"1" means interrupt request, "0" means non-interrupt

Bit 0(TCIF) : TCC timer overflow interrupt flag

Set when TCC timer overflows .

Bit 1(CNT1) : Counter1 timer overflow interrupt flag

Set when counter1 timer overflows.

Bit 2(CNT2) : Counter2 timer overflow interrupt flag

Set when counter2 timer overflows .

Bit 3(INT0) : External INT0 pin interrupt flag

If PORT70 ,PORT71,PORT72 or PORT73 has a falling edge trigger signal. CPU will set this bit.

Bit 4(INT1) : External INT1 pin interrupt flag

If PORT74 ,PORT75 or PORT76 has a falling edge trigger signal. CPU will set this bit.

Bit 5(INT2) : External INT2 pin interrupt flag

If PORT77 has a falling edge or rising edge (controlled by CONT register) trigger signal. CPU will set this bit.

Bit 6(FSK/CW) : FSK data or Call waiting data interrupt flag.

If FSKDATA or CAS has a falling edge trigger signal, CPU will set this bit.

Bit 7(RBF/STD) : SPI data transfer complete or DTMF receiver signal valid interrupt

If serial IO 's RBF signal has a rising edge signal (RBF set to "1" when transfer data completely), CPU will set this bit. Or DTMF receiver's STD signal has a rising edge signal (DTMF decode a DTMF signal).

IOCF is the interrupt mask register. User can read and clear.

Trigger edge as the table

Signal	Trigger	<Note>
TCC	Time out	
COUNTER1	Time out	
COUNTER2	Time out	
INT0	Falling edge	
INT1	Falling edge	
INT2	Falling/Falling & rising edge	Controlled by CONT register
FSK	Falling edge	
RBF/STD	Rising edge	

R10~R3F (General Purpose Register)

R10~R3F (Banks 0 ~ 3) : All of them are general purpose registers.

VII.2 Special Purpose Registers

A (Accumulator)

Internal data transfer, or instruction operand holding

It's not an addressable register.

CONT (Control Register)

7	6	5	4	3	2	1	0
INT_EDGE	INT	TS	-	PAB	PSR2	PSR1	PSR0

Bit 0~Bit 2(PSR0~PSR2) : TCC/WDT prescaler bits

PSR2	PSR1	PSR0	TCC rate	WDT rate
0	0	0	1:2	1:1
0	0	1	1:4	1:2
0	1	0	1:8	1:4
0	1	1	1:16	1:8
1	0	0	1:32	1:16
1	0	1	1:64	1:32
1	1	0	1:128	1:64
1	1	1	1:256	1:128

Bit 3(PAB) : Prescaler assignment bit

0/1 → TCC/WDT

Bit 4 : undefined

Bit 5(TS) : TCC signal source

** This specification is subject to change without notice.*

0 → Instruction clock

1 → 16.384kHz

Instruction clock = MCU clock/2, Refer to RA Bit 4 ~ Bit 6 for PLL and Main clock selection. See fig.17.

Bit 6(INT) : INT enable flag

0 → interrupt masked by DISI or hardware interrupt

1 → interrupt enabled by ENI/RETI instructions

Bit 7(INT_EDGE) : interrupt edge type of P77

0 → P77's interruption source is a rising edge signal and falling edge signal.

1 → P77's interruption source is a falling edge signal.

CONT register is readable (CONTR) and writable (CONTW).

TCC and WDT :

There is an 8-bit counter available as prescaler for the TCC or WDT. The prescaler is available for the TCC only or WDT only at the same time.

An 8 bit counter is available for TCC or WDT determined by the status of the bit 3 (PAB) of the CONT register.

See the prescaler ratio in CONT register.

Fig.16 depicts the circuit diagram of TCC/WDT.

Both TCC and prescaler will be cleared by instructions which write to TCC each time.

The prescaler will be cleared by the WDT and SLEP instructions, when assigned to WDT mode.

The prescaler will not be cleared by SLEP instructions, when assigned to TCC mode.

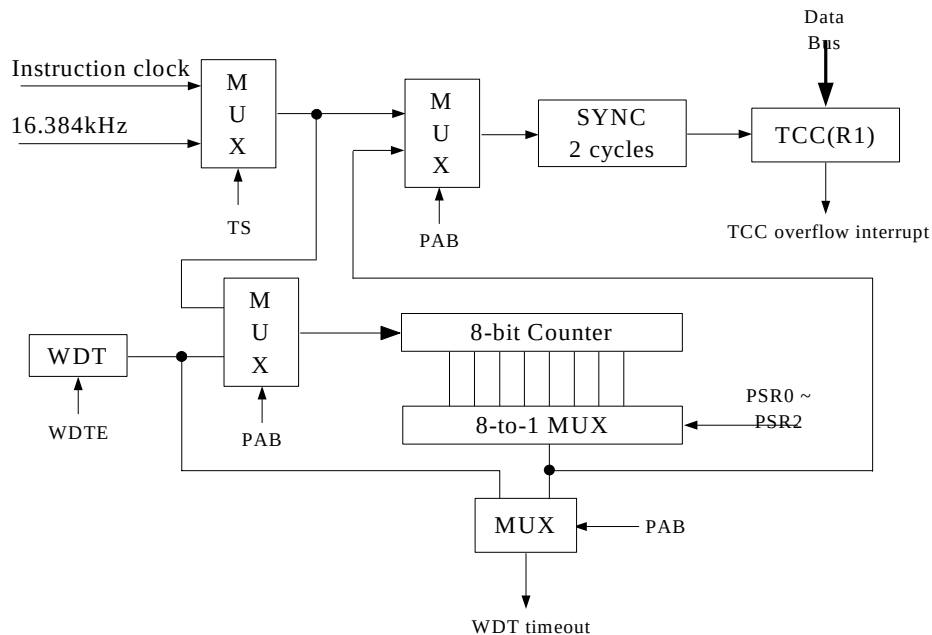


Fig.17 Block diagram of TCC WDT

IOC5 (PORT5 I/O control, PORT switch, Key tone, CDAS, LCD bias , Stack Pointer)

PAGE0 (PORT5 I/O control register, PORT switch)

7	6	5	4	3	2	1	0
IOC57	IOC56	IOC55	CASPWR	P9SH	P9SL	P8SH	P8SL

Bit 0 (P8SL) : Switch low nibble I/O PORT8 or LCD segment output for share pins SEGxx/P8x pins

0 → select normal P80 ~ P83 for low nibble PORT8

1 → select SEG64 ~ SEG67 output for LCD SEGMENT output.

* This specification is subject to change without notice.

- Bit 1 (P8SH) :** Switch high nibble I/O PORT8 or LCD segment output for share pins SEGxx/P8x pins
 0 → select normal P84 ~ P87 for high nibble PORT8
 1 → select SEG68 ~ SEG71 output for LCD SEGMENT output.
- Bit 2 (P9SL) :** Switch low nibble I/O PORT9 or LCD segment output for share pins SEGxx/P9x pins
 0 → select normal P90 ~ P93 for low nibble PORT9
 1 → select SEG72 ~ SEG75 output for LCD SEGMENT output.
- Bit 3 (P9SH) :** Switch high nibble I/O PORT9 or LCD segment output for share pins SEGxx/P9x pins
 0 → select normal P94 ~ P97 for high nibble PORT9
 1 → select SEG76 ~ SEG79 output for LCD SEGMENT output.*Bit 4:general register
- Bit 4 (CWPWR) :** Power control of Call Waiting circuit
 1/0 → enable circuit /disable circuit
- Bit 5~Bit 7(IOC55~IOC57) :** PORT5 I/O direction control registers.
 0 → put the relative I/O pin as output
 1 → put the relative I/O pin into high impedance

PAGE1 (Key tone control, CDAS, LCD bias control)

7	6	5	4	3	2	1	0
KT1	KT0	KTS	CDAS	BIAS3	BIAS2	BIAS1	BIAS0

Bit 0~Bit 3(BIAS0~BIAS3) : LCD operation voltage selection

$$V1 = VDD * (5 - n/15)/5$$

(BIAS3 to BIAS0)	V1 voltage	Example (VDD=5V)
0000	$VDD * (5-0/15)/5$	5V
0001	$VDD * (5-1/15)/5$	4.93V
0010	$VDD * (5-2/15)/5$	4.86V
0011	$VDD * (5-3/15)/5$	4.80V
0100	$VDD * (5-4/15)/5$	4.73V
:	:	:
1101	$VDD * (5-13/15)/5$	4.13V
1110	$VDD * (5-14/15)/5$	4.07V
1111	$VDD * (5-15/15)/5$	4.0V

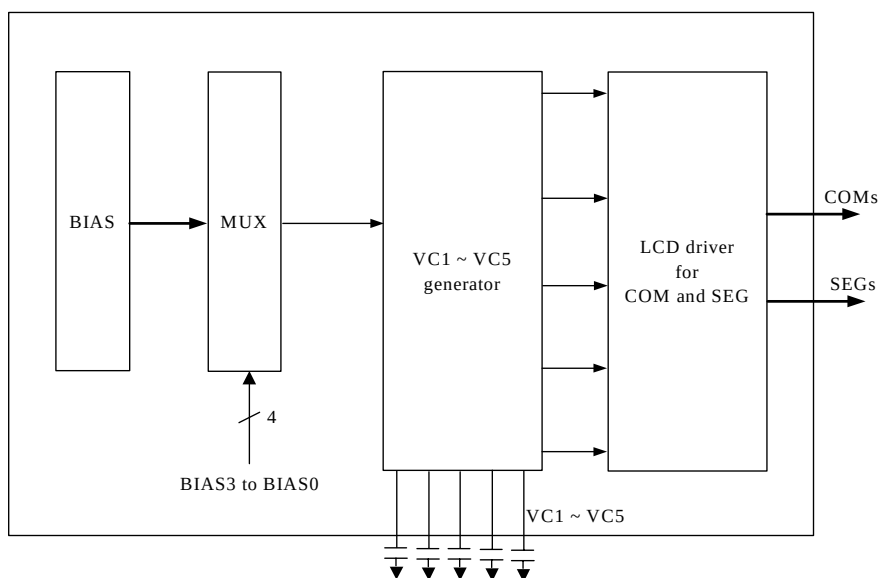


Fig.18 The relation between bias and V1 to V5

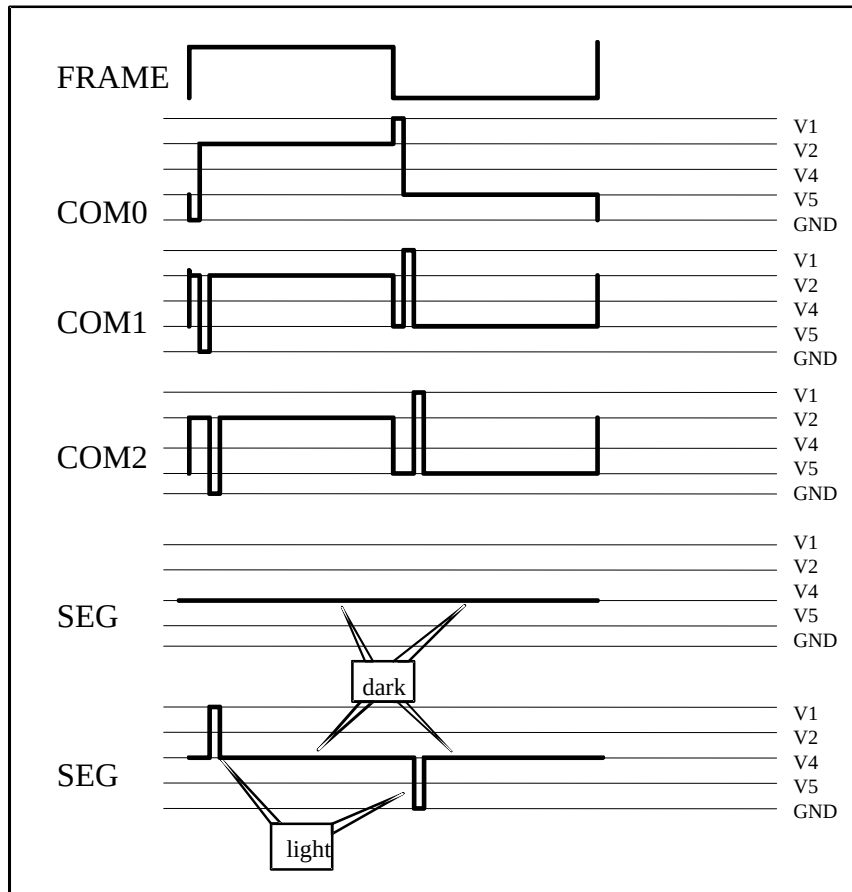


Fig.19a LCD waveform (1/4 bias) for 1/8 duty, 1/9 duty, 1/16 duty

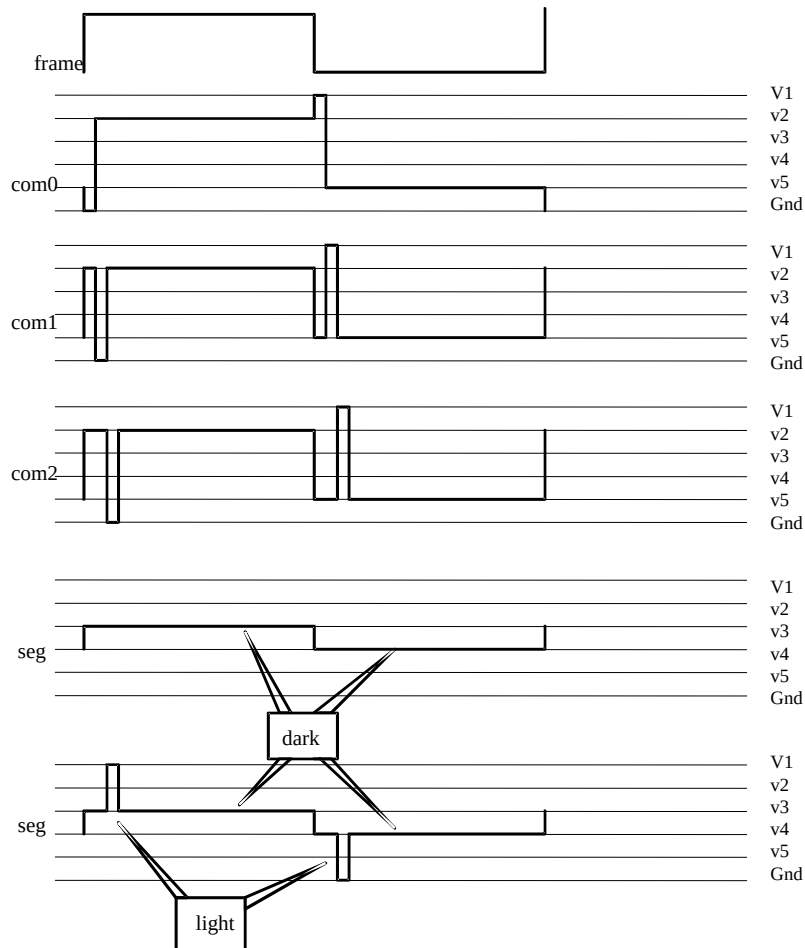


Fig.19b LCD waveform (1/5 bias) for 1/24 duty

Bit 4(CDAS) : Current DA switch

0 → normal PORT66

1 → Current DA output

Bit 5(KTS) : Key tone output switch

0 → normal PORT67

1 → key tone output .

Bit 6~Bit 7(KT0~KT1) : Key tone output frequency and its power control

KT1	KT0	Key tone frequency and power
0	0	$32.768\text{KHz}/32 = 1.024\text{kHz}$ clock and enable
0	1	$32.768\text{KHz}/16 = 2.048\text{kHz}$ clock and enable
1	0	$32.768\text{KHz}/8 = 4.096\text{kHz}$ clock and enable
1	1	Power off key tone

PAGE2 (Stack Pointer)

7	6	5	4	3	2	1	0
STKF	STKM	STKP5	STKP4	STKP3	STKP2	STKP1	STKP0

Bit 0~Bit 5(STKP0~STKP5) : Stack Point selection bits(User must enable CODE Option Register bit 2 before using Stack pointer function)

Stack5	Stack4	STKP3	STKP2	STKP1	STKP0	Stack Point
0	0	0	0	0	0	Stack 0
0	0	0	0	0	1	Stack 1
0	0	0	0	1	0	Stack 2
0	0	0	0	1	1	Stack 3
0	:	:	:	:	:	:
0	:	:	:	:	:	:
0	1	1	1	1	0	Stack 30
0	1	1	1	1	1	Stack 31
1	0	0	0	0	0	Stack 32
:	:	:	:	:	:	:

User can read bit 5 .. bit 0 to understand how many stack layer that program used . Bit 5 .. bit 0 is a six bit counter. The counter will incrementally after user use internal , external interrupt or “CALL” instruction and it will decrement when user use “RET” or “RETI” instruction. When Bit7(STKEN) is set to 1 and

bit 5 .. bit 0 are 0b011110 → 0b011111 , interrupt will occur.

Bit 6(STKM) : Stack overflow mask bit.

0 → STK interrupt disable.

1 → STK interrupt enable.

Bit 7(STKF) : Stack Point overflow interrupt flag bit.

STKF will set to 1 when bit 5 .. bit 0 are 0b011110 → 0b011111

IOC6 (PORT6 I/O control, CDA, PORT switch, LCD driving control)

PAGE0 (PORT6 I/O control register)

7	6	5	4	3	2	1	0
IOC67	IOC66	IOC65	IOC64	IOC63	IOC62	IOC61	IOC60

Bit 0~Bit 7(IOC60~IOC67) : PORT6(0~7) I/O direction control register

0 → put the relative I/O pin as output

1 → put the relative I/O pin into high impedance

PAGE1 (Current DA control,)

7	6	5	4	3	2	1	0
DAEN	DA6	DA5	DA4	DA3	DA2	DA1	DA0

Bit 0~Bit 6(DA0~DA6) : Current DA output buffer

User can use this buffer to control the output current of current DA for the driving transistor of speaker.

Bit 7 (DAEN) : Current DA enable control

0/1 → disable/enable

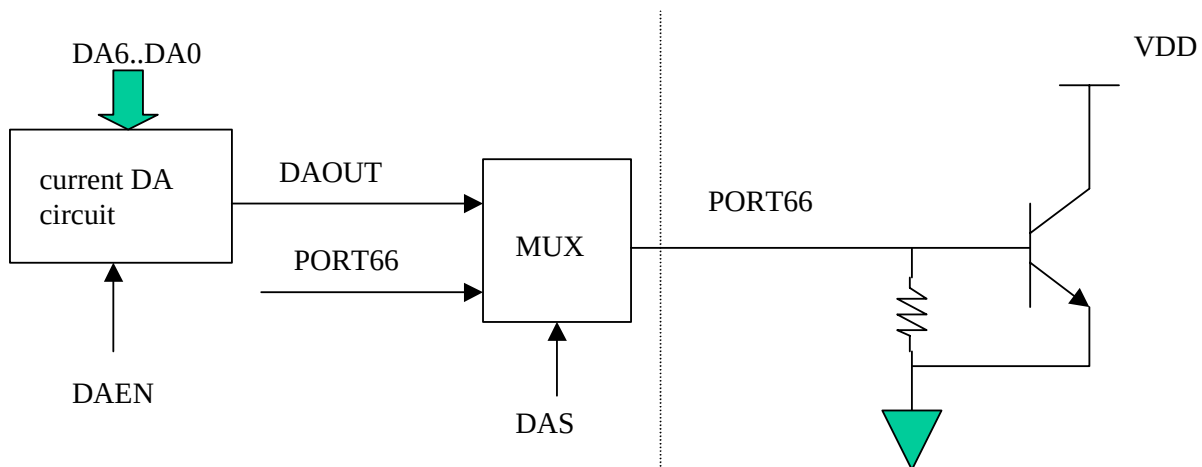


Fig.20 Current DA structure

PAGE 2 (PORT switch, LCD driving ability control)

7	6	5	4	3	2	1	0
PCSH	PCSL	PBS	LCDDV1	LCDDV0	CDAL2	CDAL1	CDAL0

Bit 0~Bit 2(CDAL0~DAL1) : change output level of current DA

CDAL2	CDAL1	CDAL0	Output level
0	0	0	L0 (ratio = 1/8)
0	0	1	L1 (ratio = 2/8)
0	1	0	L2 (ratio = 3/8)
0	1	1	L3 (ratio = 4/8)
1	0	0	L4 (ratio = 5/8)
1	0	1	L5 (ratio = 6/8)
1	1	0	L6 (ratio = 7/8)
1	1	1	L7 (ratio = 1)

Bit 3~Bit 4(LCDDV0~LCDDV1) : LCD driver's driving ability control

LCDDV1	LCDDV0	Driving mode
0	0	Normal mode (ratio = 1)
0	1	Weak mode (ratio = 1/2)
1	0	Strong mode (ratio = 2)
1	1	Maximum mode (ratio = 4)

LCDDV0 ~ LCDDV1 are used to select the driving ability of LCD driver. The driving ability is Maximum mode > Strong mode > Normal mode > Weak mode by 1/2 ratio individually. The larger driving ability it is selected, the larger output loading of LCD driver output can be afforded and the more current consumption is occurred. It depends on user's application.

Bit 5(PBS) : Switch I/O PORTB or LCD segment output for share pins SEGxx/PBx

0 → select normal PB0 ~ PB7 for PORTB

1 → select SEG48 ~ SEG55 output for LCD SEGMENT output.

Bit 6(PCSL) : Switch low nibble I/O PORTC or LCD segment output for share pins SEGxx/PCx

0 → select normal PC0 ~ PC3 for low nibble PORTC

1 → select SEG56 ~ SEG59 output for LCD SEGMENT output.

Bit 7(PCSH) : Switch high nibble I/O PORTC or LCD segment output for share pins SEGxx/PCx

- 0 → select normal PC4 ~ PC7 for high nibble PORTC
1 → select SEG60 ~ SEG63 output for LCD SEGMENT output.

IOC7 (PORT7 I/O control, Key strobe(8~15))

PAGE0 (PORT7 I/O control register)

7	6	5	4	3	2	1	0
IOC77	IOC76	IOC75	IOC74	IOC73	IOC72	IOC71	IOC70

Bit 0~Bit 7(IOC70~IOC77) : PORT7(0~7) I/O direction control register

- 0 → put the relative I/O pin as output
1 → put the relative I/O pin into high impedance

PAGE1 (Key strobe control register)

7	6	5	4	3	2	1	0
STRB15	STRB14	STRB13	STRB12	STRB11	STRB10	STRB9	STRB8

Bit 0~Bit 7(STRB8~STRB15) : Key strobe control bits

These key strobe control registers correspond to SEGMENT8 to SEGMENT15. Please refer KEYSTOBE explanation (RE page0).

IOC8 (PORT8 I/O control, , Key strobe(16~23))

PAGE0 (PORT8 I/O control register)

7	6	5	4	3	2	1	0
IOC87	IOC86	IOC85	IOC84	IOC83	IOC82	IOC81	IOC80

Bit 0~Bit 7(IOC80~IOC87) : PORT8(0~7) I/O direction control register

- 0 → put the relative I/O pin as output
1 → put the relative I/O pin into high impedance

PAGE1 (Key strobe control register)

7	6	5	4	3	2	1	0
STRB23	STRB22	STRB21	STRB20	STRB19	STRB18	STRB17	STRB16

Bit 0~Bit 7(STRB16~STRB23) : Key strobe control bits

These key strobe control registers correspond to SEGMENT16 to SEGMENT23. Please refer KEYSTOBE explanation (RE page0).

IOC9 (PORT9 I/O control, DTMF receiver)

PAGE0 (PORT9 I/O control register)

7	6	5	4	3	2	1	0
IOC97	IOC96	IOC95	IOC94	IOC93	IOC92	IOC91	IOC90

Bit 0~Bit 7(IOC90~IOC97) : PORT9(0~7) I/O direction control register

- 0 → put the relative I/O pin as output
1 → put the relative I/O pin into high impedance

PAGE1 (DTMF receiver)

7	6	5	4	3	2	1	0
DREN	STD	TDP2	TDP1	Q4	Q3	Q2	Q1

Bit 0~Bit 3(Q1~Q4) : DTMF receiver decoding data

To provide the code corresponding to the last valid tone-pair received (see code table). STD signal which steering output presents a logic high when a received tone-pair has been registered and the Q4 ~ Q1 output latch updated and generate a interruption (IOCF has enabled); returns to logic low when the voltage on ST/GT falls below V_{tst}.

F low	F high	Key	DREN	Q4~Q1
697	1209	1	1	0001
697	1336	2	1	0010
697	1477	3	1	0011
770	1209	4	1	0100
770	1336	5	1	0101
770	1477	6	1	0110
852	1209	7	1	0111
852	1336	8	1	1000
852	1477	9	1	1001
941	1209	0	1	1010
941	1336	*	1	1011
941	1477	#	1	1100
697	1633	A	1	1101
770	1633	B	1	1110
852	1633	C	1	1111
941	1633	D	1	0000
Any	Any	Any	0	xxxx (x:unknown)

Bit 4~Bit 5(TDP1~TDP2) : Tone detection present time setup.

TDP2	TDP1	Tdp
0	0	20 ms
0	1	15 ms
1	0	10 ms
1	1	5 ms

Bit 6(STD) : Delayed steering output.

Presents a logic high when a received tone-pair has been registered and the output latch updated; returns to logic low when the voltage on St/GT falls below V_{tst}.

0/1 → Data invalid/data valid

Bit 7(DREN) : DTMF receiver power control

0/1 → power down/ power up

Be sure open main clock before using DTMF receiver circuit . A logic low applied to DREN will shut down power of the device to minimize the power consumption in a standby mode. It stops functions of the filters.

In many situations not requiring independent selection of receive and pause, the simple steering circuit of is applicable. Component values are chosen according to the following formulae:

$$t_{REC} = t_{DP} + t_{GTP} \quad t_{ID} = t_{DA} + t_{GTA}$$

The value of t_{DP} is a parameter of the device and t_{REC} is the minimum signal duration to be recognized by the receiver. A value for C of 0.1 uF is recommended for most applications, leaving R to be selected by the designer. For example, a suitable value of R for a t_{REC} of 30mS would be 300k.

Different steering arrangements may be used to select independently the guard-times for tone-present (t_{GTP}) and tone-absent (t_{GTA}). This may be necessary to meet system specifications which place both accept and reject limits on both tone duration and inter digital pause.

Guard-time adjustment also allows the designer to tailor system parameters such as talk off and noise immunity. Increasing t_{REC} improves talk-off performance, since it reduces the probability that tones simulated by speech will maintain signal condition for long enough to be registered. On the other hand, a relatively short t_{REC} with a long t_{DO} would be appropriate for extremely noisy environments where fast acquisition time and immunity to drop-outs would be required.

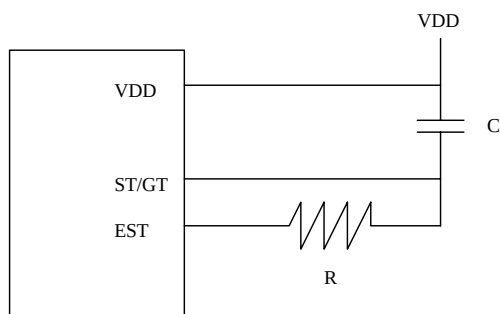


Fig.21. DTMF receiver delay time control

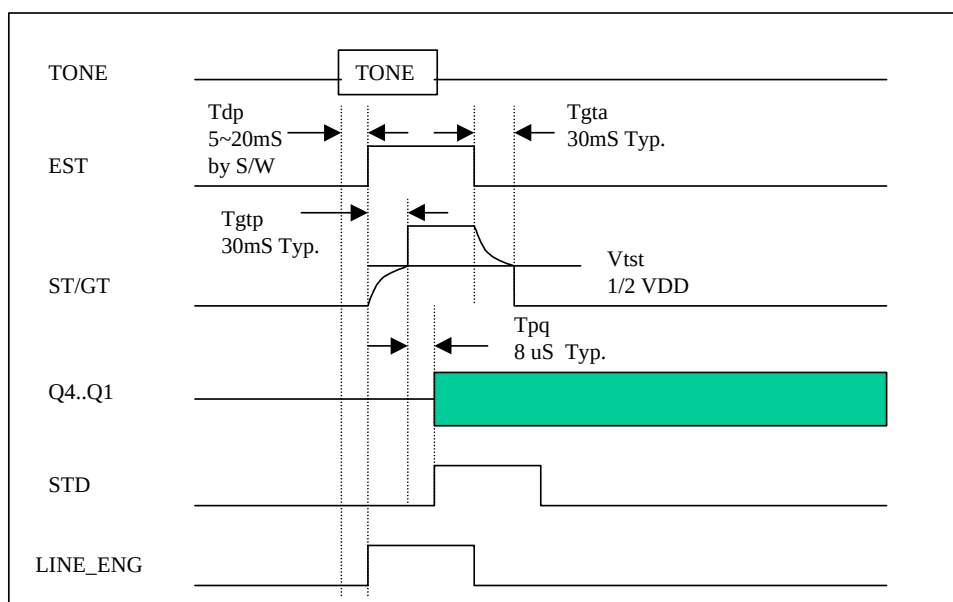


Fig.22. DTMF receiver timing.

**IOCA (CN1's and CN2's clock and scaling, PORT7 pull high control)
PAGE0 (Counter1's and Counter2's clock and scale setting)**

7	6	5	4	3	2	1	0
CNT2S	C2P2	C2P1	C2P0	CNT1S	C1P2	C1P1	C1P0

Bit 0~Bit 2(C1P0~C1P2) : Counter1 scaling

C1P2	C1P1	C1P0	COUNTER1
0	0	0	1:2
0	0	1	1:4
0	1	0	1:8
0	1	1	1:16
1	0	0	1:32
1	0	1	1:64
1	1	0	1:128

1	1	1	1:256
---	---	---	-------

Bit 3(CNT1S) : Counter1 clock source

0/1 → 16.384kHz/instruction clock

Bit 4~Bit 6(C2P0~C2P2) : Counter2 scaling

C2P2	C2P1	C2P0	COUNTER2
0	0	0	1:2
0	0	1	1:4
0	1	0	1:8
0	1	1	1:16
1	0	0	1:32
1	0	1	1:64
1	1	0	1:128
1	1	1	1:256

Bit 7(CNT2S) : Counter2 clock source

0/1 → 16.384kHz/instruction clock

PAGE1 (PORT7 pull high control register)

7	6	5	4	3	2	1	0
PH77	PH76	PH75	PH74	PH73	PH72	PH71	PH70

Bit 0~Bit 7(PH70~PH77) : PORT7(0~7) pull high control register

0 → disable pull high function.

1 → enable pull high function

IOCB (PORTB I/O control, PORT6 pull high control)

PAGE0 (PORTB I/O control register)

7	6	5	4	3	2	1	0
IOCB7	IOCB6	IOCB5	IOCB4	IOCB3	IOCB2	IOCB1	IOCB0

Bit 0~Bit 7(IOCB0~IOCB7) : PORTB(0~7) I/O direction control register

0 → put the relative I/O pin as output

1 → put the relative I/O pin into high impedance

PAGE1 (PORT6 pull high control register)

7	6	5	4	3	2	1	0
PH67	PH66	PH65	PH64	PH63	PH62	PH61	PH60

Bit 0~Bit 7(PH60~PH67) : PORT6(0~7) pull high control register

0 → disable pull high function.

1 → enable pull high function

IOCC (PORTC I/O control, TONE1 control)

PAGE0 (PORT9 I/O control register)

7	6	5	4	3	2	1	0
IOCC7	IOCC6	IOCC5	IOCC4	IOCC3	IOCC2	IOCC1	IOCC0

Bit 0~Bit 7(IOCC0~IOCC7) : PORTC(0~7) I/O direction control register

0 → put the relative I/O pin as output

1 → put the relative I/O pin into high impedance

PAGE1 (TONE1 control register)

7	6	5	4	3	2	1	0
T17	T16	T15	T14	T13	T12	T11	T10

Bit 0~Bit 7(T10~T17) : Tone generator1's frequency divider and power control

Please Run in Normal mode .

Clock source = 111957Hz

T17~T10 = '11111111' → Tone generator1 will has 439(111957/N , N=255) Hz SIN wave output.

:

:

T17~T10 = '00000010' → Tone generator1 will has 55978(111957/N , N=2) Hz SIN wave output.

T17~T10 = '00000001' → DC bias voltage output

T17~T10 = '00000000' → Power off

Built-in tone generator can generate dialing tone signals for telephone of dialing tone type or just a single tone. In DTMF application, there are two kinds of tone. One is the group of row frequency (TONE1), the other is the group of column frequency (TONE2), each group has 4 kinds of frequency, user can get 16 kinds of DTMF frequency totally. Tone generator contains a row frequency sine wave generator for generating the DTMF signal which selected by IOCC page1 and a column frequency sine wave generator for generating the DTMF signal which selected by IOCD page1. This block can generate single tone by filling one of these two register.

If all the values are low, the power of tone generators will turn off .

		TONE2 (IOCD PAGE1) High group freq.			
		1203.8Hz (0X5D)	1332.8Hz (0X54)	1473.1Hz (0X4C)	1646.4Hz (0X44)
TONE1(IOCC page1) Low group freq.	699.7Hz(0x0A0)	1	2	3	A
	772.1Hz(0x091)	4	5	6	B
	854.6Hz(0x083)	7	8	9	C
	940.8Hz(0x077)	*	0	#	D

Also TONE1 and TONE2 are an asynchronous tone generator so the both can be used to generate Caller ID FSK signal. In FSK generator application, TONE1 or TONE2 can generate 1200Hz Mark bit and 2200Hz Space bit for Bell202 or 1300Hz Mark bit and 2100Hz Space bit for V.23. See the following table.

TONE1(IOCC PAGE1) or TONE2(IOCD PAGE1)	Freq. (Hz)	meaning
0x5D	1203.8	Bell202 FSK Mark bit
0x33	2195.2	Bell202 FSK Space bit
0x56	1301.8	V.23 FSK Mark bit
0x35	2112.4	V.23 FSK Space bit

IOCD (Counter1 data, TONE2 control) PAGE0 (Counter1 data buffer)

7	6	5	4	3	2	1	0
CN17	CN16	CN15	CN14	CN13	CN12	CN11	CN10

Bit 0~Bit 7(CN10~CN17) : Counter1's data buffer

User can read and write this buffer. Counter1 is a eight bit up-counter with 8-bit prescaler that user can use IOCD to preset and read the counter. (write = preset) After a interruption, it will reload the preset value.

Example: write: IOW 0x0D ; write the data at accumulator to counter1 (preset)

Example: read: IOR 0x0D ;read IOCD data and write to accumulator

PAGE1 (TONE2 control register)

7	6	5	4	3	2	1	0
T27	T26	T25	T24	T23	T22	T21	T20

Bit 0~Bit 7(T20~T27) : Tone generator1's frequency divider and power control. Please refer to IOCC page1 Tone1 control register for detail.

IOCE (Counter2 data, Comparator and OP control)

PAGE0 (Counter2 data buffer)

7	6	5	4	3	2	1	0
CN27	CN26	CN25	CN24	CN23	CN22	CN21	CN20

Bit 0~Bit 7(CN20~CN27) : Counter2's data buffer

User can read and write this buffer. Counter2 is a eight bit up-counter with 8-bit prescaler that user can use IOCD to preset and read the counter. (write = preset) After a interruption, it will reload the preset value.

Example: write: IOW 0x0E ; write the data at accumulator to counter2 (preset)

Example: read: IOR 0x0E ;read IOCE data and write to accumulator

PAGE1 (Comparator reference voltage type, PORT switch, OP)

7	6	5	4	3	2	1	0
CMPREF	CMPIN3	CMPIN2	CMPIN1	P5S2	P5S1	OPEN	OPOUT

Bit 0 (OPOUT) : Schmitt trigger output for OP block

It's read only register which from the output of operation amplifier through a Schmitt trigger.

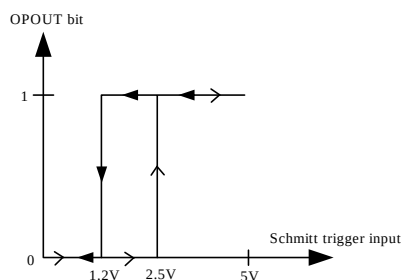


Fig.23 Transition curve of Schmitt trigger

The Schmitt trigger has hysteresis characteristic. The input voltage is come from OP-(pin43) to OPO(pin45, Schmitt trigger input). The input voltage is from 0V to 5V and from 5V to 0V have different transition curve shown in the following.

Bit 1 (OPEN) : Power control for OP block

0/1 → disable OP/enable OP

Bit 2~Bit 3 (P5S1~P5S2) : PORT5 switch

P5S2	P5S1	OPEN	PORT55	PORT56	PORT57	Status
0 or 1	0	0	PORT55	PORT56	PORT57	Normal PORT5 IO
0	0	1	OP-	OP+	OPO	Power off OP block
1	0	1	OP-	OP+	OPO	Amp
0	1	1	OP-	OP+	OPO	(unused)
1	1	1	OP-	OP+	OPO	Amp and Schmitt
0 or 1	1	0	STGT	EST	PORT57	DTMF receiver IO

<Note> In the status items, "Amp" means OP block works as amplifier only. Schmitt trigger is output disable. It can be a general OP amplifier.

In the status items, "Amp and Schmitt" means OP block works as amplifier and Schmitt trigger is output enable. The output of amplifier will be fed to the input of Schmitt trigger. It can be an energy detector.

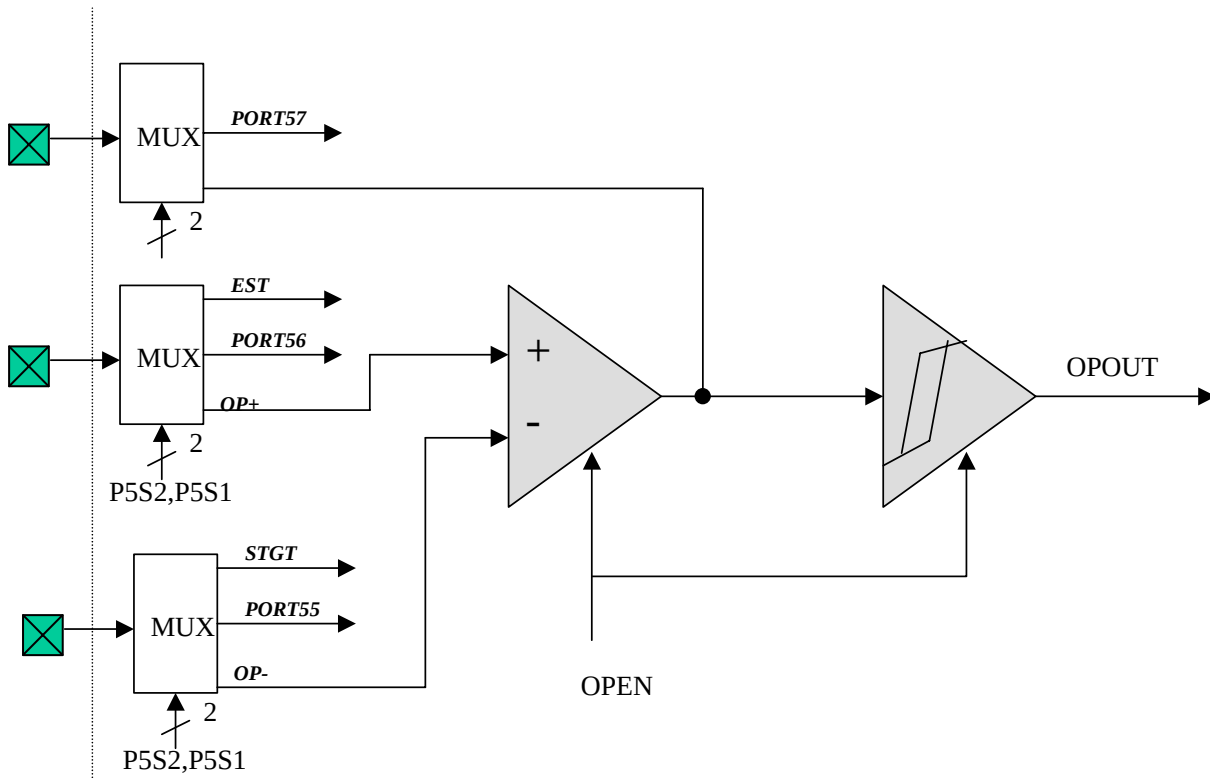


Fig.24 OP structure

External reference signal

The analog signal that is presented at Cin- compares to the signal at Cin+, and the digital output of the comparator is adjusted accordingly.

*The reference signal must be between Vss and Vdd.

*Threshold detector applications may be the same reference.

*The comparator can operate from the same or different reference source.

OP outputs

*The compared result is stored in the OPOUT through a Schmitt trigger.

Using as an operation amplifier

The comparator can be used as an operation amplifier, if a feedback resistor is connected from the input to the output externally.

Bit 4 (CMPIN1) : Switch for controlling PORT63 as IO PORT or a comparator input.

0 → IO PORT63

1 → comparator input

Bit5 (CMPIN2) : Switch for controlling PORT64 as IO PORT or a comparator input.

0 → IO PORT64

1 → comparator input

Bit 6 (CMPIN3) : Switch for controlling PORT65 as IO PORT or a comparator input.

0 → IO PORT65

1 → comparator input

Bit 7 (CMPREF) : Switch for comparator reference voltage type

0 → internal reference voltage

1 → external reference voltage

PAGE2 (Energy Detector)

7	6	5	4	3	2	1	0
VRSEL	DED	EDGE	WUDD	CW_SMB	DEDCLK	DEDPWR	DEDTHD

Bit 0 (DEDTHD) : The minimum detection threshold of Differential Energy Detector (DED)

0/1 → -45dBm/-35dBm

Bit 1 (DEDPWR) : Power control of Differential Energy Detector (DED)

0/1 → Power off / Power on

Bit 2 (DEDCLK) : Operating clock for Differential Energy Detector (DED)

0/1 → 32.768kHz/3.5826MHz

This bit is used to select operating clock for Differential Energy Detector (DED). When this bit is set to “1”, the PLL is also enabled regardless of RA bit 6 (ENPLL) value. At this time, the Energy detector works at high frequency mode. When this bit is set to “0”, the Energy Detector works at low frequency mode. The difference between high frequency mode and low frequency is as follows.

DEDPWR	DEDCLK	ENPLL	Energy detector CLK	main CLK
0	X	X	X	Decision by ENPLL
1	0	0	32.768 KHZ	Disable
1	0	1	32.768 KHZ	Enable
1	1	0	3.5826 MHZ	Disable
1	1	1	3.5826 MHZ	Enable

PS. “X” means don’t care

Bit 3(CW_SMB) : Call Waiting / short message receiver switch

0 → Short message mode select. $\pm 5.5\%$ CAS tone accepted frequency range deviation.(Protocol : $\pm 5\%$)

1 → Call Waiting mode select. CAS tone accepted frequency range deviation is decided on CODE Option Register bit 5 (1:for Europe and USA / 0:for China)

Bit 4 (WUDD) : Wake-up control of Energy Detector (DED) output data

1/0 → enable/disable

Bit 5 (EDGE) : Wake-up and interrupt triggering edge control of Energy Detector (DED) output

1/0 → Falling edge trig. / Rising edge and Falling edge trig.

Bit 6 (DED) : Interrupt mask of DED output data

0 → disable interrupt of DED output data

1 → enable interrupt of DED output data

Bit 7 (VRSEL) : Reference voltage VR selection bit for Comparator

0/1 → VR = VDD/VR = 2.0V, When this bit is set to “0”, V2_0 ref. circuit will be powered off. 2.0V ref. circuit is only powered on when this bit and RD page0 bit 7(CMPEN) are all set to “1”.

IOCF (Interrupt Mask Register)

7	6	5	4	3	2	1	0
RBF/STD	FSK/CW	INT2	INT1	INT0	CNT2	CNT1	TCIF

Bit 0 ~ Bit 7 : Interrupt enable bits.

0/1 → disable interrupt/enable interrupt

VII.3 I/O Port

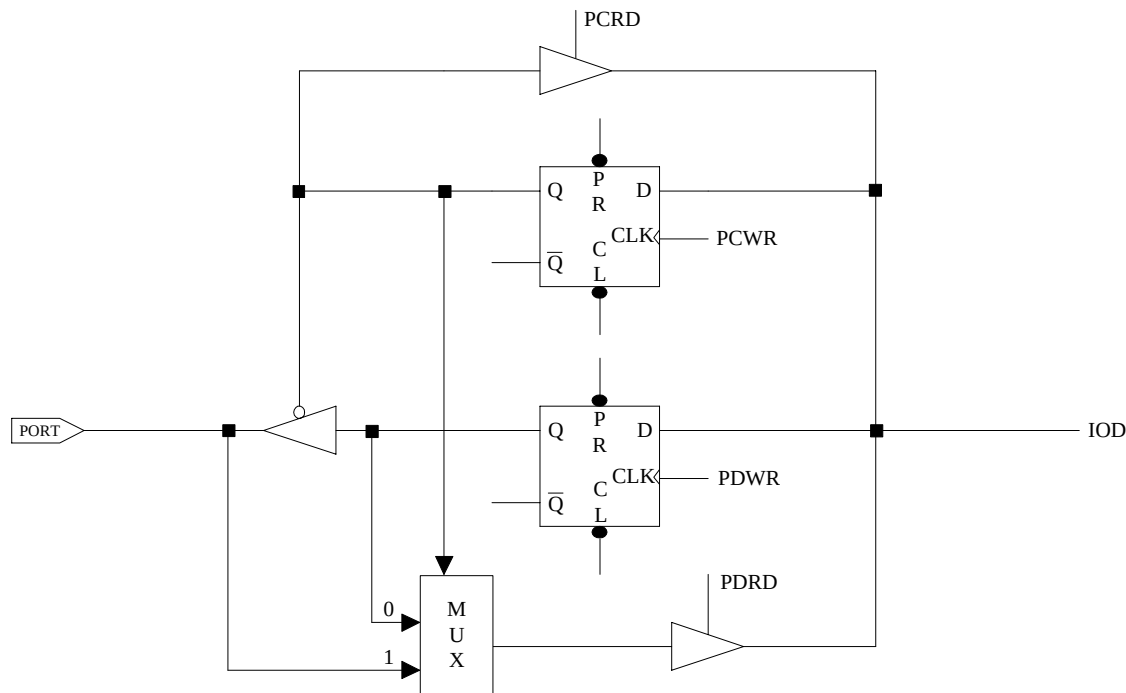


Fig.25 The circuit of I/O port and I/O control register

The I/O registers are bi-directional tri-state I/O ports. The I/O ports can be defined as "input" or "output" pins by the I/O control registers under program control. The I/O registers and I/O control registers are both readable and writable. The I/O interface circuit is shown in Fig.25

VII.4 RESET

The RESET can be caused by

- (1) Power on voltage detector reset (POVD) and power on reset
- (2) WDT timeout. (if enabled and in GREEN or NORMAL mode)
- (3) /RESET pin pull low

<Note> At case (1), POVD is controlled by CODE OPTION. If you enable POVD, CPU will reset at 2V under. And CPU will consume more current about 3uA . And the power on reset is a circuit always enable. It will reset CPU at about 1.4V and consume about 0.5uA.

Once the RESET occurs, the following functions are performed.

- The oscillator is running, or will be started.
- The Program Counter (R2) is set to all "0".
- When power on, the upper 3 bits of R3 and the upper 2 bits of R4 are cleared.
- The Watchdog timer and prescaler counter are cleared.

- The Watchdog timer is disabled.
- The CONT register is set to all "1"
- The other register (bit7..bit0)

address	R register page0	R register page1	IOC register page0	IOC register page1	IOC register page2
4	00xxxxxx	00000000			xxxxxxxx
5	xxx00000	xxxxxxxx	11100000	00000000	00000000
6	xxxxxxxx	xxxxxxxx	11111111	00000000	00000000
7	xxxxxxxx	xxxxxxxx	11111111	11111111	xxxxxxxx
8	xxxxxxxx	xxxxxxxx	11111111	11111111	xxxxxxxx
9	xxxxxxxx	xxxxxxxx	11111111	00000000	xxxxxxxx
A	00000xx0	xxxxxxxx	00000000	00000000	xxxxxxxx
B	xxxxxxxx	xxxxxxxx	11111111	00000000	xxxxxxxx
C	xxxxxxxx	xxxxxxxx	11111111	00000000	xxxxxxxx
D	00000000	xxxxxxxx	00000000	00000000	xxxxxxxx
E	00000000	00xxxxxx	00000000	00000000	00000000
F	00000000	-	00000000	-	

VII.5 wake-up

The controller provided sleep mode for power saving.

- (1) **SLEEP** mode , RA(7)=0 + "SLEP" instruction .

The controller will turn off all the CPU and crystal. Other circuit with power control like key tone control or PLL control (which has enable register), user has to turn it off by software.

Wake-up from SLEEP mode

- (1) WDT time out
- (2) external interrupt
- (3) /RESET pull low

All these cases will reset controller , and run the program at address zero. The status just like the power on reset. Be sure to enable circuit at case (1) or (2).

VII.6 Interrupt

RF is the interrupt status register which records the interrupt request in flag bits. IOCF is the interrupt mask register. TCC timer, Counter1 and Counter2 are internal interrupt source. P70 ~ P77(INT0 ~ INT1) are external interrupt input which interrupt sources are come from the external. If the interrupts are happened by these interrupt sources, then RF register will generate '1' flag to corresponding register if you enable IOCF register. Global interrupt is enabled by ENI instruction and is disabled by DISI instruction. When one of the interrupts (when enabled) generated, will cause the next instruction to be fetched from address 008H. Once in the interrupt service routine the source of the interrupt can be determined by polling the flag bits in the RF register. The interrupt flag bit must be cleared in software before leaving the interrupt service routine and enabling interrupts to avoid recursive interrupts.



VII.7 Instruction Set

Instruction set has the following features:

- (1) Every bit of any register can be set, cleared, or tested directly.
- (2) The I/O register can be regarded as general register. That is, the same instruction can operates on I/O register.

The symbol "R" represents a register designator which specifies which one of the 64 registers (including operational registers and general purpose registers) is to be utilized by the instruction. Bits 6 and 7 in R4 determine the selected register bank. "b" represents a bit field designator which selects the number of the bit, located in the register "R", affected by the operation. "k" represents an 8 or 10-bit constant or literal value.

INSTRUCTION BINARY	HEX	MNEMONIC	OPERATION	STATUS AFFECTED	Instruction cycle
0 0000 0000 0000	0000	NOP	No Operation	None	1
0 0000 0000 0001	0001	DAA	Decimal Adjust A	C	1
0 0000 0000 0010	0002	CONTW	A → CONT	None	1
0 0000 0000 0011	0003	SLEP	0 → WDT, Stop oscillator	T,P	1
0 0000 0000 0100	0004	WDTC	0 → WDT	T,P	1
0 0000 0000 rrrr	000r	IOW R	A → IOCR	None	1
0 0000 0001 0000	0010	ENI	Enable Interrupt	None	1
0 0000 0001 0001	0011	DISI	Disable Interrupt	None	1
0 0000 0001 0010	0012	RET	[Top of Stack] → PC	None	2
0 0000 0001 0011	0013	RETI	[Top of Stack] → PC Enable Interrupt	None	2
0 0000 0001 0100	0014	CONTR	CONT → A	None	1
0 0000 0001 rrrr	001r	IOR R	IOCR → A	None	1
0 0000 0010 0000	0020	TBL	R2+A → R2 bits 9,10 do not clear	Z,C,DC	2
0 0000 01rr rrrr	00rr	MOV R,A	A → R	None	1
0 0000 1000 0000	0080	CLRA	0 → A	Z	1
0 0000 11rr rrrr	00rr	CLR R	0 → R	Z	1
0 0001 00rr rrrr	01rr	SUB A,R	R-A → A	Z,C,DC	1
0 0001 01rr rrrr	01rr	SUB R,A	R-A → R	Z,C,DC	1
0 0001 10rr rrrr	01rr	DECA R	R-1 → A	Z	1
0 0001 11rr rrrr	01rr	DEC R	R-1 → R	Z	1
0 0010 00rr rrrr	02rr	OR A,R	A ∨ R → A	Z	1
0 0010 01rr rrrr	02rr	OR R,A	A ∨ R → R	Z	1
0 0010 10rr rrrr	02rr	AND A,R	A & R → A	Z	1
0 0010 11rr rrrr	02rr	AND R,A	A & R → R	Z	1
0 0011 00rr rrrr	03rr	XOR A,R	A ⊕ R → A	Z	1
0 0011 01rr rrrr	03rr	XOR R,A	A ⊕ R → R	Z	1
0 0011 10rr rrrr	03rr	ADD A,R	A + R → A	Z,C,DC	1
0 0011 11rr rrrr	03rr	ADD R,A	A + R → R	Z,C,DC	1
0 0100 00rr rrrr	04rr	MOV A,R	R → A	Z	1
0 0100 01rr rrrr	04rr	MOV R,R	R → R	Z	1
0 0100 10rr rrrr	04rr	COMA R	/R → A	Z	1
0 0100 11rr rrrr	04rr	COM R	/R → R	Z	1
0 0101 00rr rrrr	05rr	INCA R	R+1 → A	Z	1
0 0101 01rr rrrr	05rr	INC R	R+1 → R	Z	1
0 0101 10rr rrrr	05rr	DJZA R	R-1 → A, skip if zero	None	2 if skip
0 0101 11rr rrrr	05rr	DJZ R	R-1 → R, skip if zero	None	2 if skip
0 0110 00rr rrrr	06rr	RRCA R	R(n) → A(n-1) R(0) → C, C → A(7)	C	1

* This specification is subject to change without notice.



0	0110	01rr	rrrr	06rr	RRC R	$R(n) \rightarrow R(n-1)$ $R(0) \rightarrow C, C \rightarrow R(7)$	C	1
0	0110	10rr	rrrr	06rr	RLCA R	$R(n) \rightarrow A(n+1)$ $R(7) \rightarrow C, C \rightarrow A(0)$	C	1
0	0110	11rr	rrrr	06rr	RLC R	$R(n) \rightarrow R(n+1)$ $R(7) \rightarrow C, C \rightarrow R(0)$	C	1
0	0111	00rr	rrrr	07rr	SWAPA R	$R(0-3) \rightarrow A(4-7)$ $R(4-7) \rightarrow A(0-3)$	None	1
0	0111	01rr	rrrr	07rr	SWAP R	$R(0-3) \leftrightarrow R(4-7)$	None	1
0	0111	10rr	rrrr	07rr	JZA R	$R+1 \rightarrow A$, skip if zero	None	2 if skip
0	0111	11rr	rrrr	07rr	JZ R	$R+1 \rightarrow R$, skip if zero	None	2 if skip
0	100b	bbrr	rrrr	0xxx	BC R,b	$0 \rightarrow R(b)$	None	1
0	101b	bbrr	rrrr	0xxx	BS R,b	$1 \rightarrow R(b)$	None	1
0	110b	bbrr	rrrr	0xxx	JBC R,b	if $R(b)=0$, skip	None	2 if skip
0	111b	bbrr	rrrr	0xxx	JBS R,b	if $R(b)=1$, skip	None	2 if skip
1	00kk	kkkk	kkkk	1kkk	CALL k	$PC+1 \rightarrow [SP]$ $(Page, k) \rightarrow PC$	None	2
1	01kk	kkkk	kkkk	1kkk	JMP k	$(Page, k) \rightarrow PC$	None	2
1	1000	kkkk	kkkk	18kk	MOV A,k	$k \rightarrow A$	None	1
1	1001	kkkk	kkkk	19kk	OR A,k	$A \vee k \rightarrow A$	Z	1
1	1010	kkkk	kkkk	1Akk	AND A,k	$A \& k \rightarrow A$	Z	1
1	1011	kkkk	kkkk	1Bkk	XOR A,k	$A \oplus k \rightarrow A$	Z	1
1	1100	kkkk	kkkk	1Ckk	RETL k	$k \rightarrow A, [Top\ of\ Stack] \rightarrow PC$	None	2
1	1101	kkkk	kkkk	1Dkk	SUB A,k	$k-A \rightarrow A$	Z,C,DC	1
1	1110	0000	0001	1E01	INT	$PC+1 \rightarrow [SP]$ $001H \rightarrow PC$	None	1
1	1110	100k	kkkk	1E8k	PAGE k	$K \rightarrow R5(4:0)$	None	1
1	1111	kkkk	kkkk	1Fkk	ADD A,k	$k+A \rightarrow A$	Z,C,DC	1

* 1 instruction cycle = 2 main clock.

VII.8 CODE Option Register

The controller has one CODE option register which is not part of the normal program memory. The option bits cannot be accessed during normal program execution.

CODE Option Register1 (Program ROM)

7	6	5	4	3	2	1	0
-	-	CWMODE	STACKEN	PACKSEL1	PACKSEL0	/DED	/PTB

Bit 0(PTB) : Program ROM data protect bit.

0/1 → protect / unprotect

When user clear this bit to 0, another person will unable read the originally program code from program ROM.

Bit 0(/DED) : Differential Energy Detect function enable bit

0/1 → enable / disable DED function

Bit 2~3(PACKSEL0~PACKSEL1): Package select.

PACKSEL1	PACKSEL0	PACKAGE	PS
X	1	134 pin die	
1	0	128 pin QFPA	PC0~PC3 floating
0	0	128 pin QFPB	PC0~PC5 floating ; add EGIN pin

Bit 4(STACKEN) : Stack pointer function enable bit

0/1 → disable / enable

Bit 5(CWMODE) : CAS tone (2130 Hz plus 2750 Hz) accepted frequency range deviation select.

0 → ± 2% Call waiting accepted frequency range deviation.(Application for China protocol : ± 1.5%)

1 → ± 1.2% Call waiting accepted frequency range deviation.(Application for Europe and USA protocol : ± 0.5%)

PAD Option

/POVD(power on voltage detect) reset can be enabled/disabled by PAD Option. This POVD pad is not shown on the pin assignment. Internally or externally connecting this pad to GND/VDD to enable/disable /POVD reset.

/POVD	2.2V reset	power on reset	Low power detect without reset	Low power detect controlled by RA(5)	sleep mode current
1	No	yes	Yes	Yes	1uA
0	yes	yes	Yes	yes	15uA

CODE Option Register2 (Data ROM)

7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	/DTB

Bit 0(PTB) : Data ROM data protect bit.

0/1 → protect / unprotect

When user clear this bit to 0, another person will unable read the originally program code from data ROM.

Bit 1~Bit 7 : Unused

VII.9 CALL WAITING Function Description

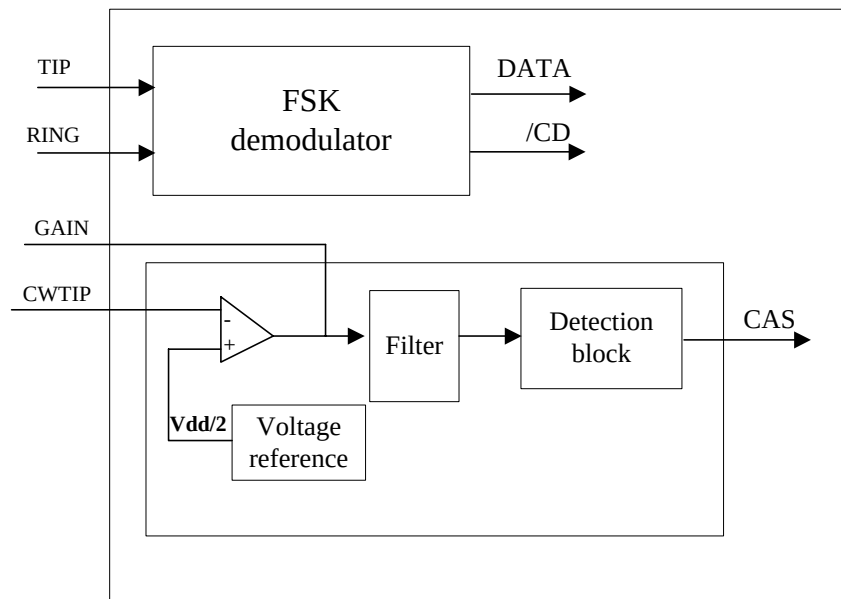


Fig.26 Call Waiting Block Diagram

Call Waiting service works by alerting a customer engaged in a telephone call to a new incoming call. This way the customer can still receive important calls while engaged in a current call. The CALL WAITING DECODER can detect CAS(Call-Waiting Alerting Signal 2130Hz plus 2750Hz) and generate a valid signal on the data pins.

The call waiting decoder is designed to support the Caller Number Deliver feature, which is offered by regional Bell Operating Companies.

In a typical application, after enabling CW circuit (by IOC5 page0 bit4 CWPWR) this IC receives Tip and Ring signals from twisted pairs. The signals as inputs of pre-amplifier, and the amplifier sends input signal to a band pass filter. Once the signal is filtered, the Detection block decodes the information and sends it to R3 register bit7 . The output data made available at R3 CAS bit.

The data is CAS signals. The CAS is normal high. When this IC detects 2130Hz and 2750Hz frequency, then CAS pin goes to low.

VII.10 Differential Energy Detector (DED)

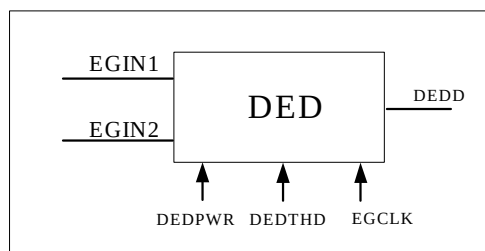


Fig.27 DED

The Differential Energy Detector is differential input level and zero crossing detector named as DED. It can detect any incoming AC signal above its threshold level and output corresponding zero-crossing frequency pulse. For this energy detector, the user can set its minimum detection threshold level at -35dBm or -45dBm by DEDTHD bit. All the minimum detection value can be achieved under input capacitor more than 4700pF and input resistor around 100k ohms . The energy detector has power control by IOCE PAGE2 bit 1 (DEDPWR).

Register bits of Energy Detector :

Register bits	Descriptions
RE bit 7 (DEDD)	DEDD : Output data of DED
IOCE PAGE2 bit 5 (EDGE)	EDGE : edge control of DED output data 1/0 => Falling edge trig. / Rising edge and Falling edge trig.
IOCE PAGE2 bit 4 (WUDD)	WUDD : Wake-up control of DED output data 1/0 => enable/disable
RE PAGE1 bit 6 (DED)	DED : Interrupt flag of DED output data
IOCE PAGE2 bit 6 (DED)	DED : Interrupt mask of DED output data 1/0 → enable/disable interrupt of DED output data
IOCE PAGE2 bit 0 (DEDTHD)	DEDTHD : Minimum detection threshold of DED 0/1 → $-45\text{dBm}/-35\text{dBm}$
IOCE PAGE2 bit 1 (DEDPWR)	DEDPWR : Power control of DED 0/1 → power off/power on
IOCE PAGE2 bit 2 (DEDCLK)	DEDCLK : operating clock of DED 0 : low frequency clock 1 : high frequency clock

VIII. Absolute Operation Maximum Ratings

RATING	SYMBOL	VALUE	UNIT
DC SUPPLY VOLTAGE	VDD	-0.3 To 6	V
INPUT VOLTAGE	V _{in}	-0.5 to VDD +0.5	V
OPERATING TEMPERATURE RANGE	T _a	0 to 70	°C

IX. DC Electrical Characteristic

(Operation current consumption for Analog circuit)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Operation current for FSK	I_FSK	VDD=5V, CID power on		2.5	4.0	mA
		VDD=3V, CID power on		2.0	3.5	
Operation current for CW	I_CW	VDD=5V, CID power on		2.5	4.0	mA
		VDD=3V, CID power on		2.0	3.5	
Operation current for DTMF receiver	I_DR	VDD=3V, DTMFr power on		2.5	4.0	mA
		VDD=3V, DTMFr power on		2.0	3.5	
Operation current for TONE generator	I_DTMF	VDD=5V, DTMF power on		0.9	1.2	mA
		VDD=3V, DTMF power on		0.5	0.8	
Current DA output current	I_DA	VDD=5V, CDA power on		2.5	4	mA
		VDD=3V, CDA power on		2.0	3.5	
Operation current for OP	I_OP	VDD=5V, PT power on		0.17		mA
		VDD=3V, PT power on		0.1		
Operation current for Comparator	I_CMP	VDD=5V, PT power on		0.15	0.3	mA
		VDD=3V, PT power on		0.13	0.2	

(T_a=25°C, VDD=5V±5%, VSS=0V)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Input Leakage Current for input pins	IIL1	VIN = VDD, VSS			±1	μA
Input Leakage Current for bi-directional pins	IIL2	VIN = VDD, VSS			±1	μA
Input High Voltage	VIH		2.0			V
Input Low Voltage	VIL				0.8	V
Input High Threshold Voltage	VIHT	/RESET, TCC, RDET1	2.0			V
Input Low Threshold Voltage	VILT	/RESET, TCC, RDET1			0.8	V
Clock Input High Voltage	VIHX	OSCI	1.8			V
Clock Input Low Voltage	VILX	OSCI			1.2	V
Output High Voltage (port5,8,9,B,C)	VOH1	IOH = -5mA	2.0			V
(port6,7)		IOH = -8mA	2.0			V
Output Low Voltage (port5,8,9,B,C)	VOL1	IOL = 5mA			0.4	V
(port6,7)		IOL = 8mA			0.4	V
Pull-high current	IPH	Pull-high active input pin at VSS		-10	-15	μA
Power down current (SLEEP mode)	ISB1	All input and I/O pin at VDD, output pin floating, WDT disabled		1	4	μA
Low clock current (GREEN mode)	ISB2	CLK=32.768KHz, All analog circuit disable, All input and		35	50	μA

* This specification is subject to change without notice.



Operating supply current (NORMAL mode)	ICC	I/O pin at VDD, output pin floating, WDT disabled, LCD disable /RESET=High, PLL enable CLK=3.579MHz, output pin floating and LCD enable, all analog circuit disable		2.8	3.5	mA
Tone generator reference voltage	Vref2		0.5		0.7	VDD

Differential Energy Detector (DED) (Ta=25°C, VDD=5.0V±5%, VSS=0V)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
EGIN1	Operating current for SED	SEDCLK bit = 0		20	25	UA
EGIN2	Operating current for SED	SEDCLK bit = 0		20	25	UA

X. AC Electrical Characteristic

CPU instruction timing (Ta=25°C, VDD=5V, VSS=0V)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Input CLK duty cycle	Dclk		45	50	55	%
Instruction cycle time	Tins	32.768kHz 3.579MHz		60 550		us ns
Device delay hold time	Tdrh			16		ms
TCC input period	Ttcc	Note 1	(Tins+20)/N			ns
Watchdog timer period	Twdt	Ta = 25°C		16		ms

Note 1: N= selected prescaler ratio.

FSK AC Characteristic (Vdd=5V, Ta=+25°C)

CHARACTERISTIC	Min	Typ	Max	Unit
FSK sensitivity				
Low Level Sensitivity Tip & Ring @SNR 20dB	-40	-48		dBm
High Level Sensitivity Tip & Ring @SNR 20dB		0		dBm
Signal Reject		-51		dBm
FSK twist				
Positive Twist (High Level)	+10			dB
Positive Twist (Low Level)	+10			dB
Negative Twist (High Level)	-6			dB
Negative Twist (Low Level)	-6			dB

CW AC Characteristic (Vdd=5V, Ta=+25°C)

CHARACTERISTIC	Min	Typ	Max	Unit
CW sensitivity				
Sensitivity @SNR 20dB		-38		dBm
Low Tone Frequency 2130Hz		±1.2		%
High Tone Frequency 2750Hz		±1.2		%
CW twist				
Twist	±7			dB

DTMFr (DTMF receiver) AC Characteristic (Vdd=5V,Ta=+25°C)

CHARACTERISTIC	Min	Typ	Max	Unit
DTMFr				
Low Level Signal Sensitivity		-36		dBm
High Level Signal Sensitivity		0		dBm
Low Tone Frequency		±2		%
High Tone Frequency		±2		%
DTMFr noise endurance				
Signal to noise ratio	15			dB

TONE generators for AC Characteristic (Vdd=5V,Ta=+25°C)

TONE generators for AC Characteristics (V _{dd} = 5V, I _{dc} = 25 mA)				
CHARACTERISTIC	Min	Typ	Max	Unit
Tone1/Tone2 signal strength (root mean square voltage)				
Tone1 signal strength V1rms (ps1)	130	155	180	mV
Tone2 signal strength V2rms (ps1)	1.259V1rms			mV
Tone twist				
(Tone1 – Tone2) twist		-2		dB
Tone frequency deviation				
Frequency deviation			±1	%

(ps1) : V1rms and V2rms has 2 dB difference. It means $20\log(V2rms/V1rms) = 20\log 1.259 = 2$ (dB)

Timing characteristic (Vdd=5V,Ta=+25°C)

Description	Symbol	Min	Typ	Max	Unit
Oscillator timing characteristic					
OSC start up	32.768kHz	Tosc		400	ms
	3.579MHz PLL			10	
FSK timing characteristic					
Carrier detect low	Tcdl	--	10	14	ms
Data out to Carrier det low	Tdoc	--	10	20	ns
Power up to FSK(setup time)	Tsup	--	15	20	ms
End of FSK to Carrier Detect high	Tcdh		--	4	ms
CW timing characteristic					
CAS input signal length (2130 ,2750 Hz @ -20dBm)	Tcasi		80		ms
Call waiting data detect delay time	Tcwd		42		ms
Call waiting data release time	Tcwr		26		ms
DTMF receiver timing characteristic					
Tone Present Detection Time	Tdp		(ps1)		
the guard-times for tone-present (C=0.1uF, R=300K)	Tgtp		30		ms
the guard-times for tone-absent (C=0.1uF, R=300K)	Tgta		30		mS
Propagation Delay (St to Q)	Tpq		8		us
Tone Absent Detection Time	Tda		(ps2)		ms
SPI timing characteristic (CPU clock 3.58MHz and Fsc0 = 3.58Mhz /2)					
/SS set-up time	Tcss	560			ns
/SS hold time	Tcsh	250			
SCLK high time	Thi	250			ns
SCLK low time	Tlo	250			ns
SCLK rising time	Tr		15	30	ns

* This specification is subject to change without notice.


SCLK falling time	Tf		15	30	ns
SDI set-up time to the reading edge of SCLK	Tisu	25			ns
SDI hold time to the reading edge of SCLK	Tihd	25			ns
SDO disable time	Tdis			560	ns

(ps1) : Controlled by software

(ps2) : Controlled by RC circuit.


XI. Timing Diagrams

AC Test Input/Output Waveform

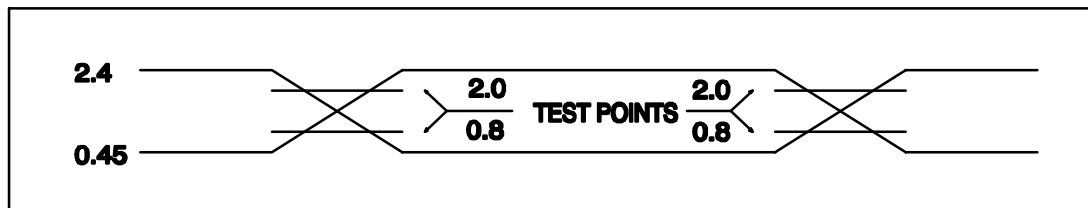

AC Testing: Input are driven at 2.4V for logic "1", and 0.45V for logic "0". Timing measurements are made at 2.0V for logic "1", and 0.8V for logic "0".

RESET Timing

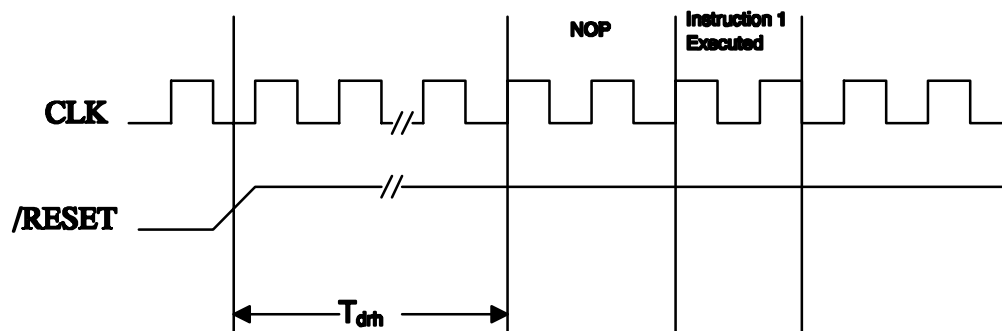

TCC Input Timing

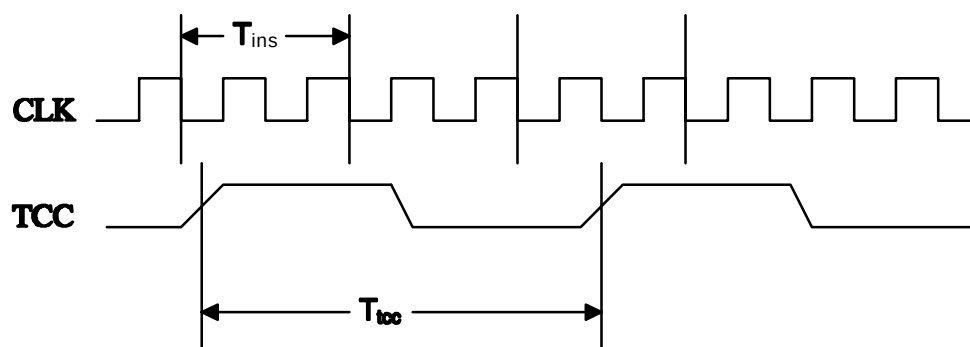


Fig.28 AC timing

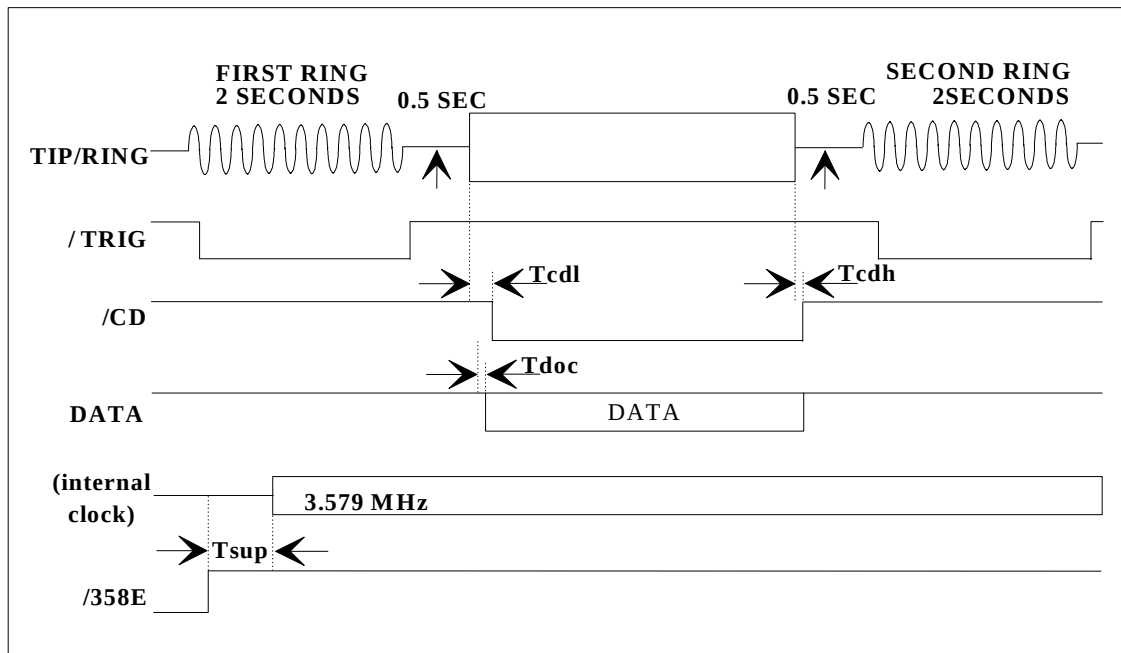


Fig.29 FSK timing diagram

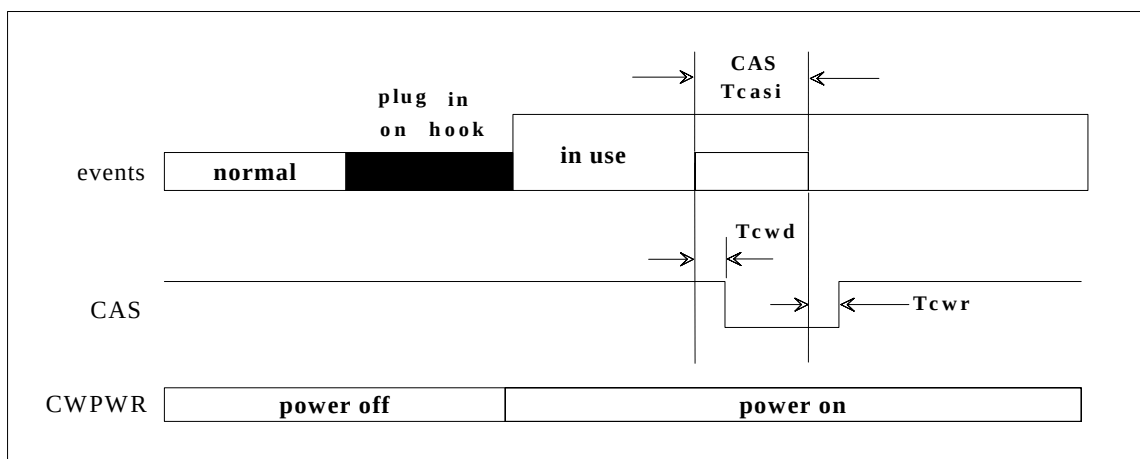


Fig.30 Call waiting timing diagram


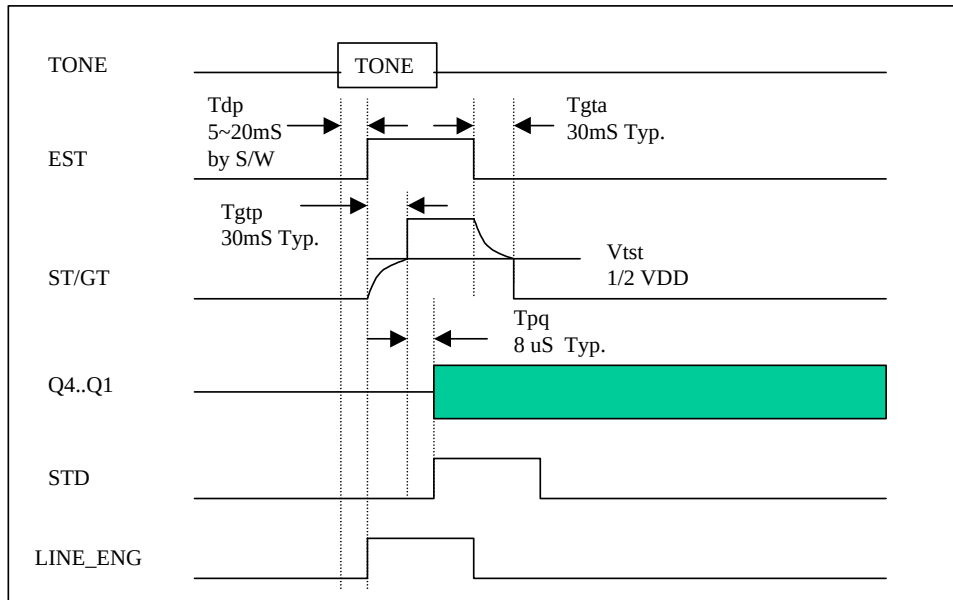



Fig.31 DTMF receiver timing diagram

XII. Application Circuit

(Using 808 built-in LCD driver)

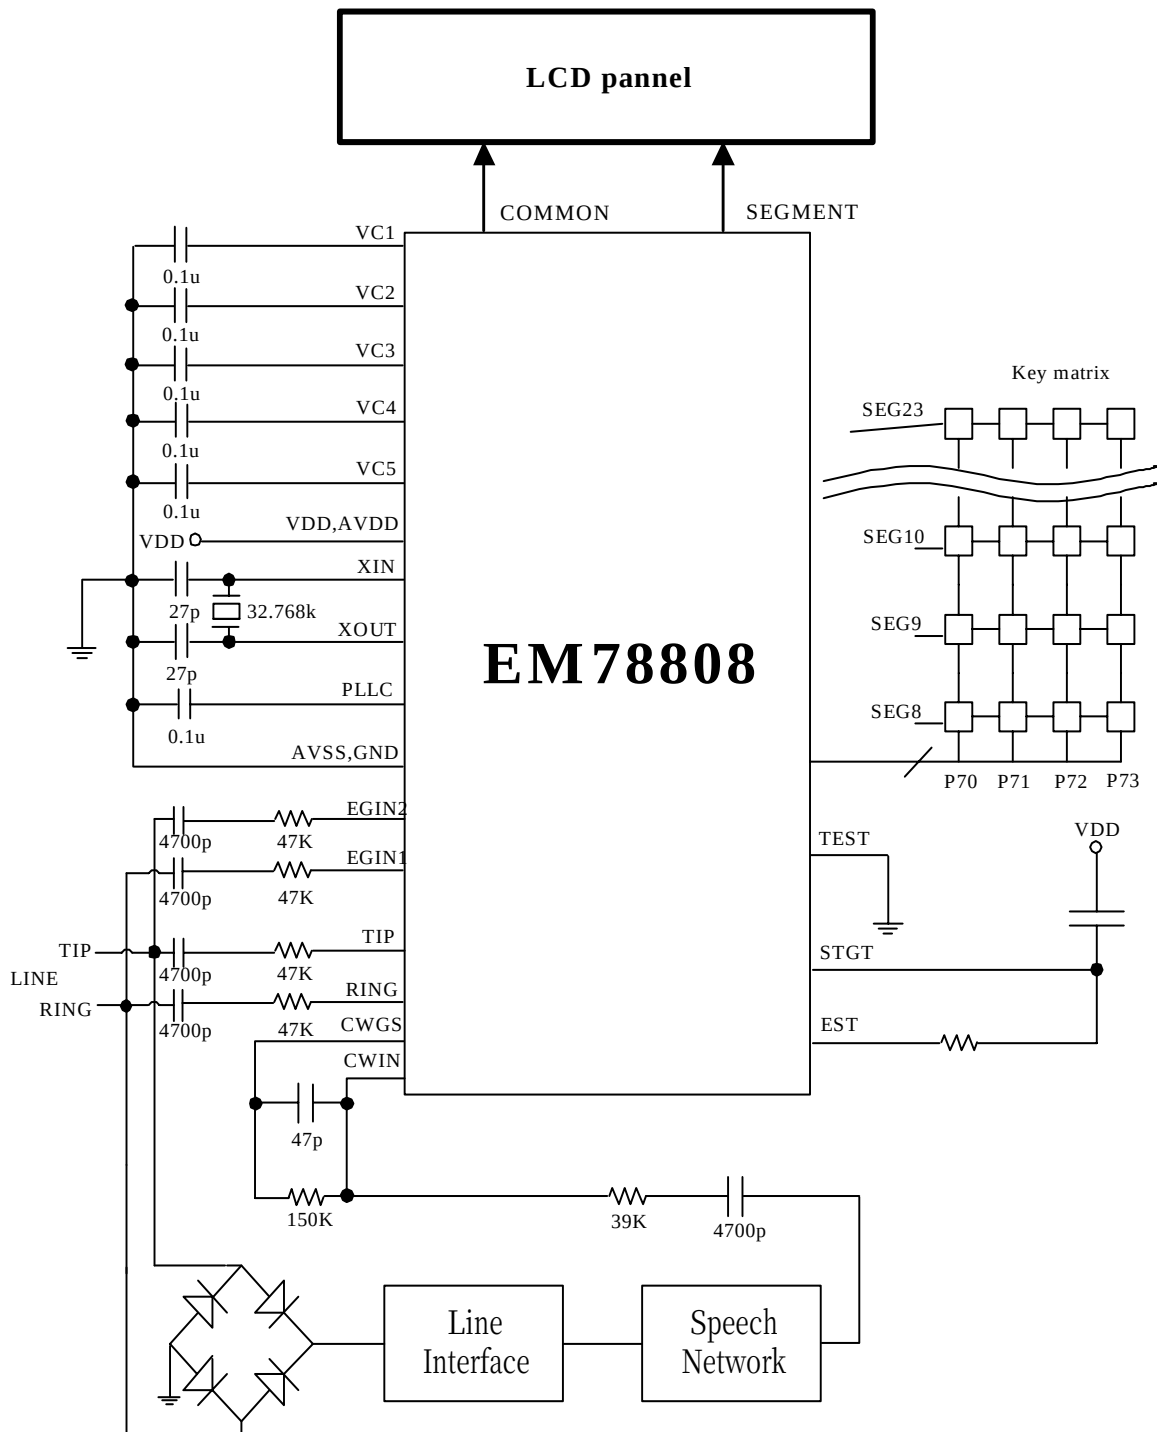

(Using external EMC LCD driver)

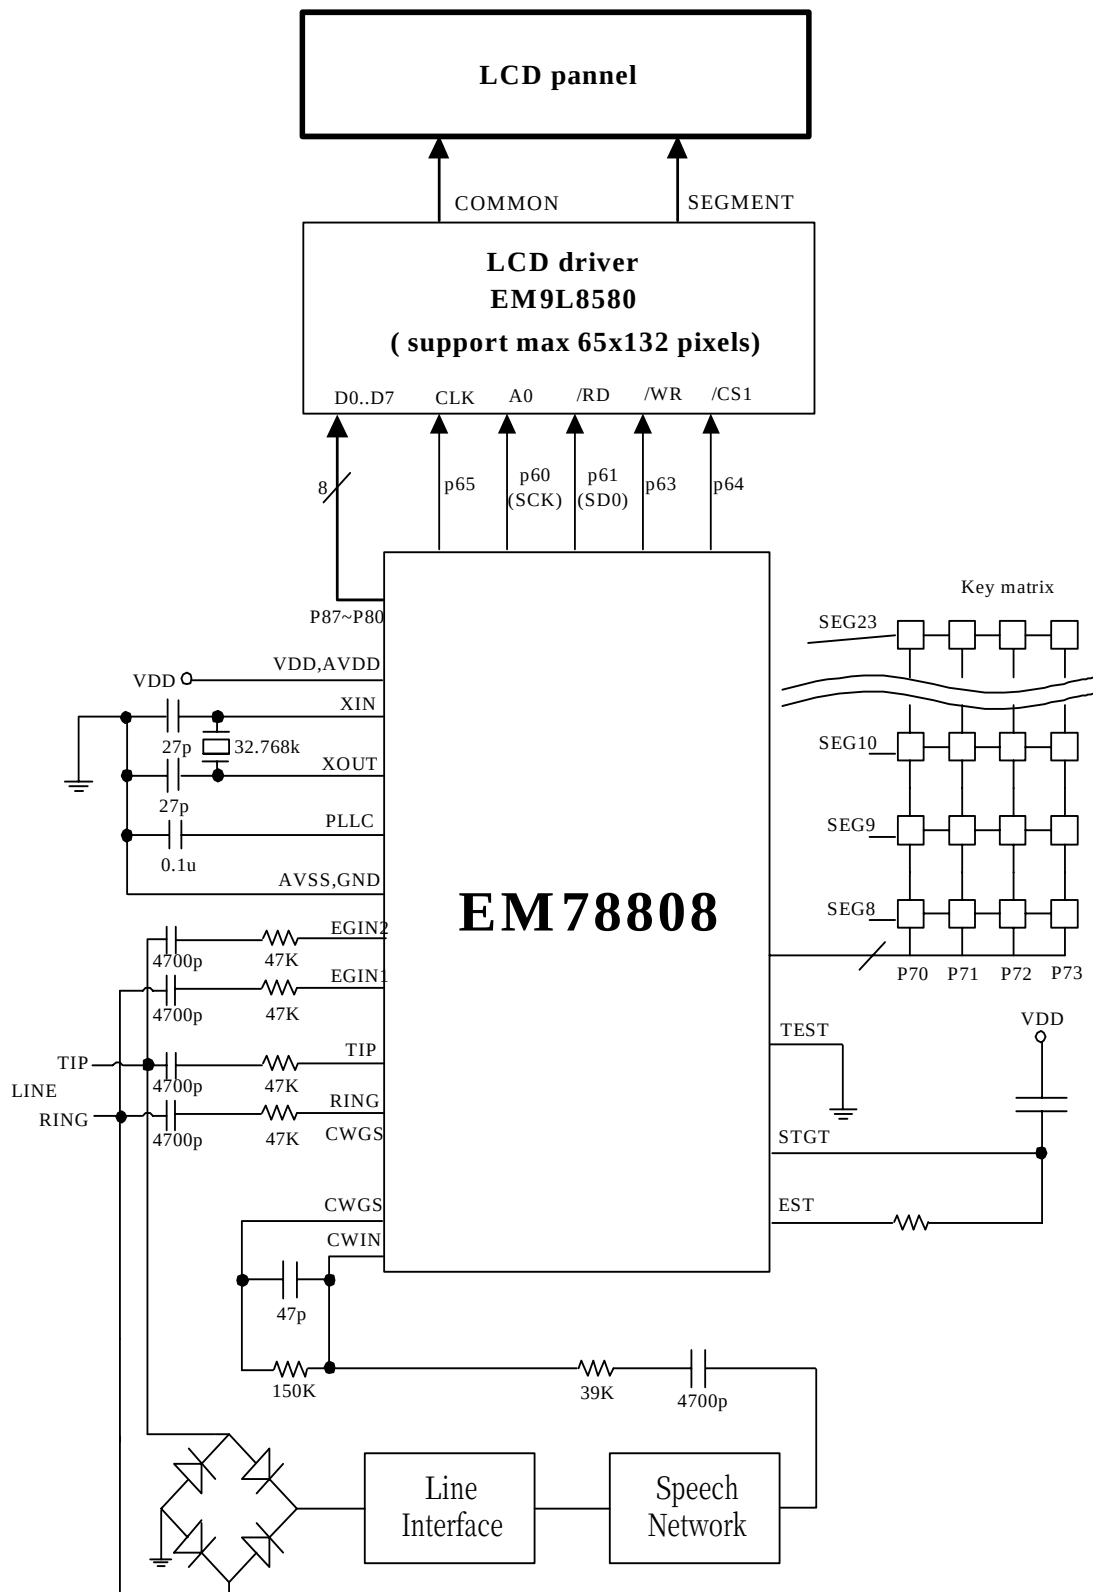



附錄: EM78R808 SPEC. (SPEC. is only shown the differences with EM78P808)

II.Feature

CPU

- Operating voltage range : 2.2V 5.5V
- 32K×13 Program ROM
- 4M×8 data ROM.
- 8K×8 on chip data RAM

IV.Pin Configuration

COM9	1	SEG45	157	SEG46	156
COM8	2	SEG44	158	SEG47	155
COM7	3	SEG43	159	SEG48	154
COM6	4	SEG42	160	SEG49	153
COM5	5	SEG41	161	SEG50	152
COM4	6	SEG40	162	SEG51	151
COM3	7	SEG39	163	SEG52	150
COM2	8	SEG38	164	SEG53	149
COM1	9	SEG37	165	SEG54	148
COM0	10	SEG36	166	SEG55	147
VC5	11	SEG35	167	SEG56	146
VC4	12	SEG34	168	SEG57	145
VC3	13	SEG33	169	SEG58	144
VC2	14	SEG32	170	SEG59	143
VC1	15	SEG31	171	SEG60	142
XIN	16	SEG30	172	SEG61	141
XOUT	17	SEG29	173	SEG62	140
VDD,AVDD	18	SEG28	174	SEG63	139
PLLC	19	SEG27	175	SEG64	138
tone	20	SEG26	176	SEG65	137
TIP	21	SEG25	177	SEG66	136
RING	22	SEG24	178	SEG67	135
CWGS	23	SEG23	179	SEG68	134
CWIN	24	SEG22	180	SEG69	133
GND,AVSS	25	SEG21	181	SEG70	132
/RESET	26	SEG20	182	SEG71	131
P70/INT0	27	SEG19	183	SEG72	130
P71/INT0	28	SEG18	184	SEG73	129
P72/INT0	29	SEG17	185	SEG74	128
P73 /INT0	30	SEG16	186	SEG75	127
P74 /INT1	31	SEG15	187	SEG76	126
P75 /INT1	32	SEG14	188	SEG77	125
P76 /INT1	33	SEG13	189	SEG78	124
P77 /INT2	34	SEG12	190	SEG79	123
P60/SCK	35	SEG11	191	ROMA19	122
P61/SDO	36	SEG10	192	ROMA18	121
P62/SDI	37	SEG9	193	ROMA17	120
P63/CMP1	38	SEG8	194	ROMA16	119
P64/CMP2	39	SEG7	195	ROMA15	118
P65/CMP3	40	COM23/SEG6	196	ROMA14	117
P66/DAOUT	41	COM22/SEG5	197	ROMA13	116
P67/KTONE	42	COM21/SEG4	198	ROMA12	115
P55/OP-/STGT	43	COM20/SEG3	199	ROMA11	114
P56/OP+/EST	44	COM19/SEG2	200	ROMA10	113
P57/OPO	45	COM18/SEG1	201	ROMA9	112
ERS	46	COM17/SEG0	202	ROMA8	111
CA-1	47	COM16/SEG0	203	ROMA7	110
CA0	48	COM15	204	ROMA6	109
CA1	49	COM14	205	ROMA5	108
CA2	50	COM13	206	ROMA4	107
CA3	51	COM12	207	ROMA3	106
CA4	52	COM11	208	ROMA2	105
CA5	53				
CA6	54				
CA7	55				
CA8	56				
CA9	57				
CA10	58				
CA11	59				
CA12	60				
CA13	61				
CA14	62				
CD0	63				
CD1	64				
CD2	65				
CD3	66				
CD4	67				
CD5	68				
CD6	69				
CD7	70				
CD8	71				
CD9	72				
CD10	73				
CD11	74				
CD12	75				
OD0	76				
OD1	77				
OD2	78				
OD3	79				
OD4	80				
OD5	81				
OD6	82				
OD7	83				
INSEND	84				
IRSEL	85				
PHIOUT	86				
X2OUT	87				
/HOLD	88				
ROMEN1	89				
ROMEN2	90				
ROMEN3	91				
ROMEN4	92				
ROMWRITE	93				
ROMREAD	94				
ROMD0	95				
ROMD1	96				
ROMD2	97				
ROMD3	98				
ROMD4	99				
ROMD5	100				
ROMD6	101				
ROMD7	102				
ROMA0	103				
ROMA1	104				

Fig.32 EM78R808 pin configuration



VI. Pin Descriptions

PIN	I/O	DESCRIPTION
POWER		
VDD AVDD	POWER	Digital power Analog power They connect together when package as 128 pin QFP.
GND AVSS	POWER	Digital ground Analog ground They connect together when package as 128 pin QFP.
CLOCK		
XIN	I	Input pin for 32.768 kHz oscillator
XOUT	O	Output pin for 32.768 kHz oscillator
PLLC	I	Phase loop lock capacitor, connect a capacitor 0.01u to 0.047u with GND
LCD		
COM0..COM15	O	Common driver pins of LCD drivers
SEG0...SEG7 SEG8..SEG47 SEG48..SEG55 SEG56..SEG63 SEG64..SEG71 SEG72..SEG79	O (COM16..COM23) O (I/O : PORTB) O (I/O : PORTC) O (I/O : PORT8) O (I/O : PORT9)	Segment driver pins of LCD drivers SEG0 to SEG7 are share with COM16 to COM23 SEG8 to SEG79 are shared with IO PORT.
VC1..VC5	I	Reference voltage input. Each one connect a capacitor (0.1u) with GND.
FSK , TONE , KTONE		
TIP	I	Should be connected with TIP side of twisted pair lines for FSK.
RING	I	Should be connected with RING side of twisted pair lines for FSK.
TONE	O	Dual tone output pin
KTONE	O (PORT67)	Key tone output. Shared with PORT67.
CW		
CWGS	O	Gain adjustment of single-ended input OP Amp
CWIN	I	Single-ended input OP Amp for call waiting decoder
DTMF receiver		
EST	O	Early steering output. Presents a logic high immediately when the digital algorithm detects a recognizable tone-pair (signal condition). Any momentary loss of signal condition will cause EST to return to a logic low. This pin shared with PORT56.
STGT	I/O	Steering input/guard time output (bi-directional). A voltage greater than V _{tst} detected at ST causes the device to register the detected tone-pair and update the output latch. A voltage less than V _{tst} frees the device to accept a new tone-pair. The GT output acts to reset the external steering time-constant; its state is a function of EST and the voltage on ST . This pin shared with PORT55.
OP		
OP-	I (PORT55)	The negative Vin input pin of the OP. This pin shared with PORT55.
OP+	I (PORT56)	The positive Vin input pin of the OP. This pin shared with PORT56.
OPO	O (PORT57)	The output of OP. This pin shared with PORT57.
SERIAL IO		
SCK	IO (PORT60)	Master: output pin, Slave: input pin. This pin shared with PORT60.

* This specification is subject to change without notice.



SDO	O (PORT61)	Output pin for serial data transferring. This pin shared with PORT61.
SDI	I (PORT62)	Input pin for receiving data. This pin shared with PORT62.
Comparator		
CMP1	I (PORT63)	Comparator input pins. Shared with PORT63, PORT64 and PORT65.
CMP2	I (PORT64)	
CMP3	I (PORT65)	
CURRENT DA		
DAOUT	O (PORT66)	Current DA output pin. It can be a control signal for sound generating. Shared with PORT66.
IO		
P55 ~P57	I/O	PORT 5 can be INPUT or OUTPUT port each bit.
P60 ~P67	I/O	PORT 6 can be INPUT or OUTPUT port each bit. Internal pull high.
P70 ~ P77	I/O	PORT 7 can be INPUT or OUTPUT port each bit. Internal Pull high function. Auto key scan function. Interrupt function.
P80 ~ P87	I/O	PORT 8 can be INPUT or OUTPUT port each bit. Shared with LCD Segment signal.
P90 ~ P97	I/O	PORT 9 can be INPUT or OUTPUT port each bit. Shared with LCD Segment signal.
PB0 ~ PB7	I/O	PORT B can be INPUT or OUTPUT port each bit. Shared with LCD Segment signal.
PC0 ~ PC7	I/O	PORT C can be INPUT or OUTPUT port each bit. Shared with LCD Segment signal.
INT0	PORT70..73	Interrupt sources which has the same interrupt flag. Any pin from PORT70 to PORT73 has a falling edge signal, it will generate a interruption.
INT1	PORT74..76	Interrupt sources which has the same interrupt flag. Any pin from PORT74 to PORT76 has a falling edge signal, it will generate a interruption.
INT2	PORT77	Interrupt source. Once PORT77 has a falling edge or rising edge signal (controlled by CONT register), it will generate a interruption.
/RESET	I	Low reset
X2OUT	O	System clock output.
CA-1	O	CA-1 is used as address line to select low-order data (8 bits, through CD0~CD7) or high-order data (5 bits, through CD0~CD4) ERS=1 => CA-1 NO USE ERS=0 => CA-1=0 HIGH ORDER DATA CA-1=1 LOW ORDER DATA
ERS	I	Input pin used to select the external ROM data bus through bus CD0~D12 or CD0~CD7 only. HIGH/LOW = CD0~CD12 / CD0~CD7.
CA0~CA14	O	Program code address bus. CA0~CA14 are address output pins for external programming ROM access.
CD0~CD12	I	Data access in terms of CA0 ~ CA12 addressing.
IRSEL	O	IRSEL is an output pin used to select an external EVEN/ODD ROM.
INSEND	O	Used to indicate the instruction completion and ready for next instruction.
/HOLD	I	Microcontroller hold request.



IOD0~IOD7	O	I/O data bus.	
PH1OUT	O	Phase 1 output	
ROMA0..ROMA19	O	External data ROM address	
ROMD0..ROMD7	IO	External data ROM data bus	
ROMEN1..ROMEN4	O	Data ROM enable pin. User can select one of four external DATA ROM by these enable signal. Please refer to RB address of data ROM.	
		ROMA21,ROMA20	ROMEN4, ROMEN3, ROMEN2, ROMEN1
		0 0	1,1,1,0
		0 1	1,1,0,1
		1 0	1,0,1,1
		1 1	0,1,1,1
ROMREAD	O	External data ROM reading signal. Normal high . When you read data ROM, it will generate a low pulse a instruction long.	
ROMWRITE	O	External data ROM writing signal. Normal high . When you write data ROM, it will generate a low pulse a instruction long.	

VII Operational Registers

R9

PAGE1 (LCD address MSB bit, Data ROM address bits)

7	6	5	4	3	2	1	0
LCDA8	-	DROM_A21	DROM_A20	DROM_A19	DROM_A18	DROM_A17	DROM_A16

Bit 0~Bit 5(DROM_A16~DROM_A21) : Data ROM address(16~21) for ROM reading.

Bit 6 : unused

Bit 7(LCDA8) : MSB of LCD address for LCD RAM reading or writing

Other LCD address bits LCDA7 ~ LCDA0 are set from RA PAGE1 Bit 7 ~ Bit 0.


For LCD address access over 0xFFH, set this bit to "1"; otherwise set this bit to "0".

IX AC Electrical Characteristic

Tdiea	Delay from Phase 3 end to INSEND active	Cl=100pF			30	ns
Tdiei	Delay from Phase 4 end to INSEND inactive	Cl=100pF			30	ns
Tiew	INSEND pulse width		30			ns
Tdca	Delay from Phase 4 end to CA Bus valid	C1=100pF			30	ns
Tacc	ROM data access time		100			ns
Tcds	ROM data setup time		20			ns
Tcdh	ROM data hold time		20			ns
Tdca-1	Delay time of CA-1	C1=100pF			30	ns

Note 1: N= selected prescaler ratio.

ERS=1 , CA-1=DISABLE

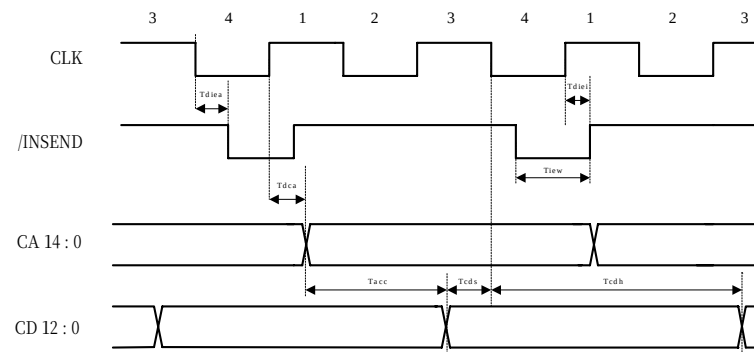

**ERS=0 , CA-1=0 HIGH ORDER DATA
CA-1=1 LOW ORDER DATA**

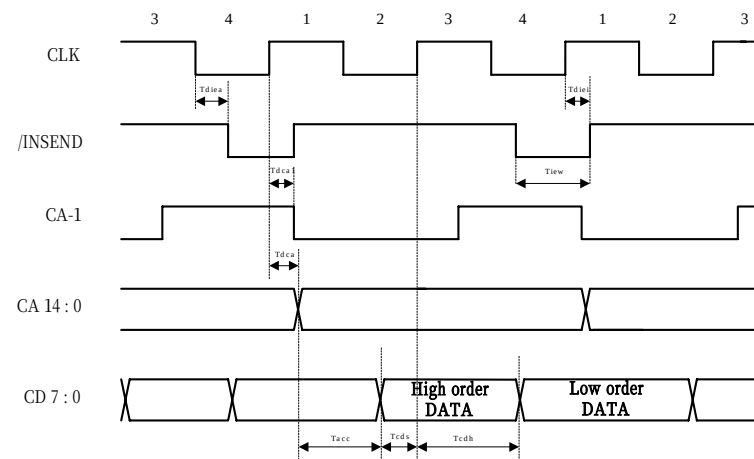


Fig.33 Data ROM access timing