
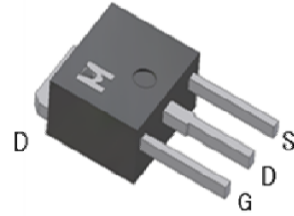


N-Channel Logic Level Enhancement Mode Field Effect Transistor

Product Summary:

BV_{DSS}	25V
$R_{DS(on)}$ (MAX.)	6m Ω
I_D	80A



UIS, Rg 100% Tested

Pb-Free Lead Plating & Halogen Free



ABSOLUTE MAXIMUM RATINGS ($T_C = 25\text{ }^\circ\text{C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNIT
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current	$T_C = 25\text{ }^\circ\text{C}$	I_D	80	A
	$T_C = 100\text{ }^\circ\text{C}$		50	
Pulsed Drain Current ¹		I_{DM}	170	
Avalanche Current		I_{AS}	53	
Avalanche Energy	$L = 0.1\text{mH}, I_D = 53\text{A}, R_G = 25\Omega$	E_{AS}	140	mJ
Repetitive Avalanche Energy ²	$L = 0.05\text{mH}$	E_{AR}	40	
Power Dissipation	$T_C = 25\text{ }^\circ\text{C}$	P_D	50	W
	$T_C = 100\text{ }^\circ\text{C}$		20	
Operating Junction & Storage Temperature Range		T_{j}, T_{stg}	-55 to 150	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNIT
Junction-to-Case	$R_{\theta JC}$		2.5	$^\circ\text{C} / \text{W}$
Junction-to-Ambient	$R_{\theta JA}$		75	

¹Pulse width limited by maximum junction temperature.

²Duty cycle $\leq 1\%$



ELECTRICAL CHARACTERISTICS ($T_c = 25\text{ }^\circ\text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	25			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1	1.5	3	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 20V, V_{GS} = 0V$			1	μA
		$V_{DS} = 20V, V_{GS} = 0V, T_J = 125\text{ }^\circ\text{C}$			25	
On-State Drain Current ¹	$I_{D(ON)}$	$V_{DS} = 10V, V_{GS} = 10V$	80			A
Drain-Source On-State Resistance ¹	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 30A$		5.3	6	$m\Omega$
		$V_{GS} = 5V, I_D = 24A$		7.6	9.5	
Forward Transconductance ¹	g_{fs}	$V_{DS} = 5V, I_D = 24A$		25		S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = 15V, f = 1MHz$		1800		pF
Output Capacitance	C_{oss}			480		
Reverse Transfer Capacitance	C_{rss}			220		
Gate Resistance	R_g	$V_{GS} = 15mV, V_{DS} = 0V, f = 1MHz$		1.2		Ω
Total Gate Charge ^{1,2}	$Q_g(V_{GS}=10V)$	$V_{DS} = 15V, V_{GS} = 10V, I_D = 30A$		34.5		nC
	$Q_g(V_{GS}=5V)$			22		
Gate-Source Charge ^{1,2}	Q_{gs}			4.8		
Gate-Drain Charge ^{1,2}	Q_{gd}			12.5		
Turn-On Delay Time ^{1,2}	$t_{d(on)}$		$V_{DS} = 15V, I_D = 25A, V_{GS} = 10V, R_{GS} = 2.7\Omega$		20	
Rise Time ^{1,2}	t_r			15		
Turn-Off Delay Time ^{1,2}	$t_{d(off)}$			50		
Fall Time ^{1,2}	t_f			20		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_c = 25\text{ }^\circ\text{C}$)						
Continuous Current	I_S				80	A
Pulsed Current ³	I_{SM}				170	
Forward Voltage ¹	V_{SD}	$I_F = I_S, V_{GS} = 0V$			1.3	V
Reverse Recovery Time	t_{rr}	$I_F = I_S, di_F/dt = 100A / \mu S$		32		nS
Peak Reverse Recovery Current	$I_{RM(REC)}$			200		A
Reverse Recovery Charge	Q_{rr}			12		nC


¹Pulse test : Pulse Width $\leq 300 \mu\text{sec}$, Duty Cycle $\leq 2\%$.

²Independent of operating temperature.


³Pulse width limited by maximum junction temperature.

Ordering & Marking Information:

Device Name: EMA06N03CS for IPAK (TO-251)

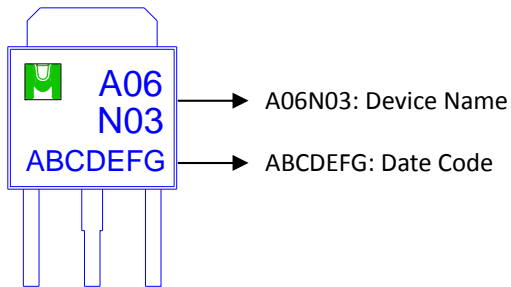

Outline Drawing

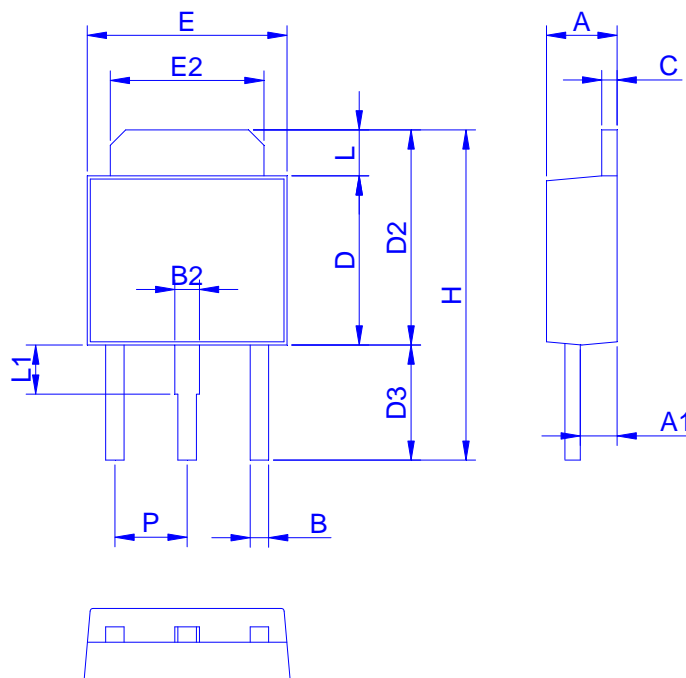

Dimension in mm

Dimension	A	A1	B	B2	C	D	D2	D3	E	E2	H	L	L1	P
Min.	2.10	0.90	0.40	0.60	0.40	5.30	6.70	3.40	6.30	4.80	10.2	0.89	0.90	2.10
Max.	2.50	1.50	0.90	1.15	0.60	6.25	7.30	4.30	6.80	5.50	11.5	1.40	1.80	2.50



TYPICAL CHARACTERISTICS

