




P-Channel Logic Level Enhancement Mode Field Effect Transistor

Product Summary:

BV <sub>DSS</sub>	-20V
R <sub>DSON</sub> (MAX.)	44mΩ
I <sub>D</sub>	-4.7A

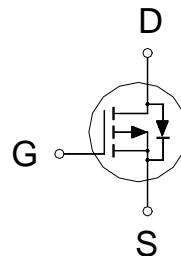

Bottom View



Pb-Free Lead Plating & Halogen Free



**ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25 °C Unless Otherwise Noted)**

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNIT
Gate-Source Voltage		V <sub>GS</sub>	±12	V
Continuous Drain Current	T <sub>A</sub> = 25 °C	I <sub>D</sub>	-4.7	A
	T <sub>A</sub> = 70 °C		-3.5	
Pulsed Drain Current <sup>1</sup>		I <sub>DM</sub>	-18.8	
Power Dissipation	T <sub>A</sub> = 25 °C	P <sub>D</sub>	2.08	W
	T <sub>A</sub> = 70 °C		1.33	
Operating Junction & Storage Temperature Range		T <sub>j</sub> , T <sub>stg</sub>	-55 to 150	°C

**THERMAL RESISTANCE RATINGS**

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNIT
Junction-to-Case	R <sub>θJC</sub>	12	60	°C / W
Junction-to-Ambient <sup>3</sup>	R <sub>θJA</sub>			

<sup>1</sup>Pulse width limited by maximum junction temperature.

<sup>2</sup>Duty cycle ≤ 1%

<sup>3</sup>60°C / W when mounted on a 1 in<sup>2</sup> pad of 2 oz copper.


ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ , Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{GS} = 0V, I_D = -250\mu\text{A}$	-20			V
Gate Threshold Voltage	$V_{GS(\text{th})}$	$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$	-0.4	-0.75	-1.2	
Gate-Body Leakage	$I_{GSS}$	$V_{DS} = 0V, V_{GS} = \pm 12V$			$\pm 100$	nA
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = -16V, V_{GS} = 0V$			-1	$\mu\text{A}$
		$V_{DS} = -16V, V_{GS} = 0V, T_J = 125^\circ\text{C}$			-10	
On-State Drain Current <sup>1</sup>	$I_{D(\text{ON})}$	$V_{DS} = -5V, V_{GS} = -4.5V$	-4.7			A
Drain-Source On-State Resistance <sup>1</sup>	$R_{DS(\text{ON})}$	$V_{GS} = -4.5V, I_D = -4.7A$		35	44	$\text{m}\Omega$
		$V_{GS} = -2.5V, I_D = -3.5A$		55	70	
		$V_{GS} = -1.8V, I_D = -1.5A$		65	90	
Forward Transconductance <sup>1</sup>	$g_{fs}$	$V_{DS} = -5V, I_D = -4.7A$		14		S
DYNAMIC						
Input Capacitance	$C_{iss}$	$V_{GS} = 0V, V_{DS} = -10V, f = 1\text{MHz}$		679		$\text{pF}$
Output Capacitance	$C_{oss}$			124		
Reverse Transfer Capacitance	$C_{rss}$			106		
Gate Resistance	$R_g$	$V_{GS} = 15\text{mV}, V_{DS} = 0V, f = 1\text{MHz}$		5.5		$\Omega$
Total Gate Charge <sup>1,2</sup>	$Q_g$	$V_{DS} = -10V, V_{GS} = -4.5V, I_D = -4.7A$		12.8		$\text{nC}$
Gate-Source Charge <sup>1,2</sup>	$Q_{gs}$			2.2		
Gate-Drain Charge <sup>1,2</sup>	$Q_{gd}$			4.1		
Turn-On Delay Time <sup>1,2</sup>	$t_{d(on)}$	$V_{DS} = -10V, I_D = -1A, V_{GS} = -4.5V, R_{GS} = 6\Omega$		12		$\text{nS}$
Rise Time <sup>1,2</sup>	$t_r$			25		
Turn-Off Delay Time <sup>1,2</sup>	$t_{d(off)}$			35		
Fall Time <sup>1,2</sup>	$t_f$			25		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ( $T_c = 25^\circ\text{C}$ )						
Continuous Current	$I_s$				-4.7	$\text{A}$
Pulsed Current <sup>3</sup>	$I_{SM}$				-18.8	
Forward Voltage <sup>1</sup>	$V_{SD}$	$I_F = I_s, V_{GS} = 0V$			-1.2	V


<sup>1</sup>Pulse test : Pulse Width  $\leq 300 \mu\text{sec}$ , Duty Cycle  $\leq 2\%$ .<sup>2</sup>Independent of operating temperature.<sup>3</sup>Pulse width limited by maximum junction temperature.

Ordering & Marking Information:

Device Name: EMF44P02VAT for EDFN 2 x 2

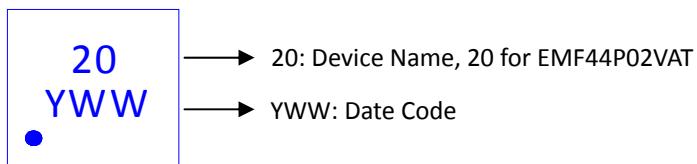


Outline Drawing

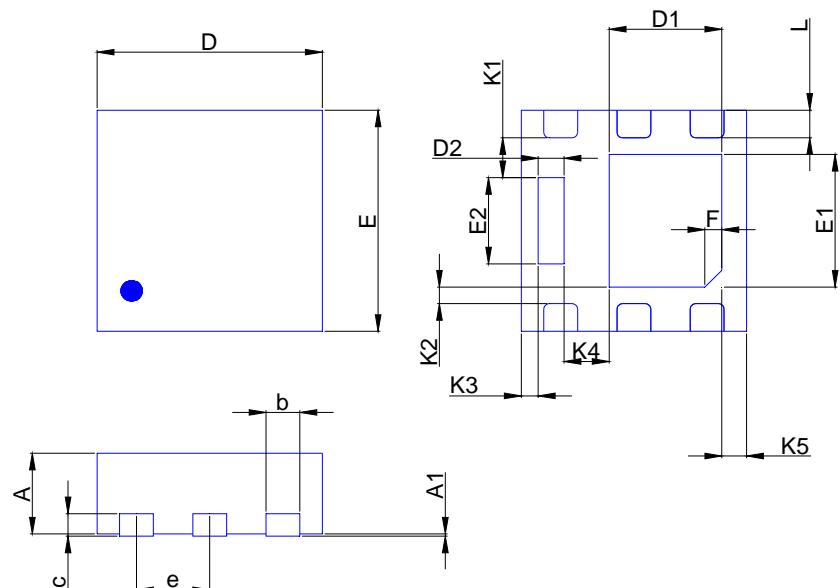

Dimension in mm

Dimension	A	A1	b	c	D	D1	D2	E	E1	E2	e	F	f	K1	K2	L	K3	K4	K5
Min.	0.50	0.00	0.25		1.9	1.0	0.13	1.9	1.1	0.65				0.306	0.10	0.2	0.10	0.27	0.17
Typ.		0.02	0.30	0.1	2.0	1.1	0.25	2.0	1.2	0.75	0.65	0.15	45°	0.356	0.15	0.25	0.15		0.22
Max.	0.65	0.05	0.35		2.1	1.2	0.35	2.1	1.3	0.88				0.406	0.20	0.3	0.20		0.27

Recommended minimum pads

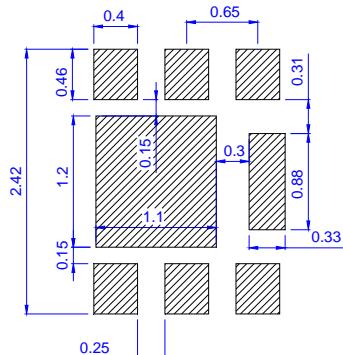

### TYPICAL CHARACTERISTICS

