

# 14 Pin DIP Delayed Pulse Width Generator TTL Compatible Active Delay Line Modules

## Features


- Precise output pulse width
- Positive-edge triggered (10 nS) min.
- Fast rise and fall time (4 nS max. measured from 0.75V to 2.4V)
- Low Profile 14 pin DIP for auto-insertion
- Propagation Delays :  $7 \pm 2$  nS from pin 8 to pin 1  
:  $7 \pm 2$  nS from pin 8 to pin 13

PART NUMBER	PULSE WIDTH * $\pm 2$ NS or $\pm 5\%$ † (PWO)	MAX OUTPUT FREQ (MHz)
EP9981-5	5	100
EP9981-10	10	50
EP9981-15	15	33
EP9981-20	20	25
EP9981-25	25	20
EP9981-30	30	16
EP9981-35	35	14
EP9981-40	40	12
EP9981-45	45	11
EP9981-50	50	10
EP9981-60	60	8.4
EP9981-70	70	7.1
EP9981-80	80	6.3
EP9981-90	90	5.5
EP9981-100	100	5.0


\* Measured at 1.5V Levels

† Whichever is greater.

DC Electrical Characteristics			Min	Max	Unit
Parameter	Test Conditions				
V <sub>OH</sub>	High-Level Output Voltage	V <sub>CC</sub> = min. V <sub>IL</sub> = max. I <sub>OH</sub> = max	2.7		V
V <sub>OL</sub>	Low-Level Output Voltage	V <sub>CC</sub> = min. V <sub>IH</sub> = min. I <sub>OL</sub> = max		0.5	V
V <sub>IK</sub>	Input Clamp Voltage	V <sub>CC</sub> = min. I <sub>I</sub> = I <sub>IK</sub>		-1.2V	V
I <sub>IH</sub>	High-Level Input Current	V <sub>CC</sub> = max. V <sub>IN</sub> = 2.7V		50	μA
I <sub>IL</sub>	Low-Level Input Current	V <sub>CC</sub> = max. V <sub>IN</sub> = 0.5V		-2	mA
I <sub>OS</sub>	Short Circuit Output Current	V <sub>CC</sub> = max.	-40	-100	mA
I <sub>CCH</sub>	High-Level Supply Current	V <sub>CC</sub> = max. V <sub>IN</sub> = OPEN		75	mA
I <sub>CCL</sub>	Low-Level Supply Current	V <sub>CC</sub> = max. V <sub>IN</sub> = 0		75	mA
N <sub>H</sub>	Fanout High-Level Output	V <sub>CC</sub> = max. V <sub>OH</sub> = 2.7V		20 TTL LOAD	
N <sub>L</sub>	Fanout Low-Level Output	V <sub>CC</sub> = max. V <sub>OL</sub> = 0.5V		10 TTL LOAD	

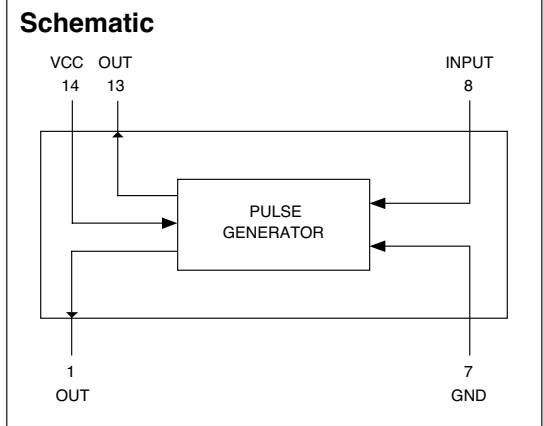

Recommended Operating Conditions		Min	Max	Unit
V <sub>CC</sub>	Supply Voltage	4.75	5.25	V
V <sub>IH</sub>	High-Level Input Voltage	2.0		V
V <sub>IL</sub>	Low-Level Input Voltage		0.8	V
I <sub>IK</sub>	Input Clamp Current		-18	mA
I <sub>OH</sub>	High-Level Output Current		-1.0	mA
I <sub>OL</sub>	Low-Level Output Current		20	mA
P	Period	P <sub>WO</sub> x2		nS
P <sub>WI</sub>	Input Pulse Width	10		nS
T <sub>A</sub>	Operating Free-Air Temperature	0	+70	°C

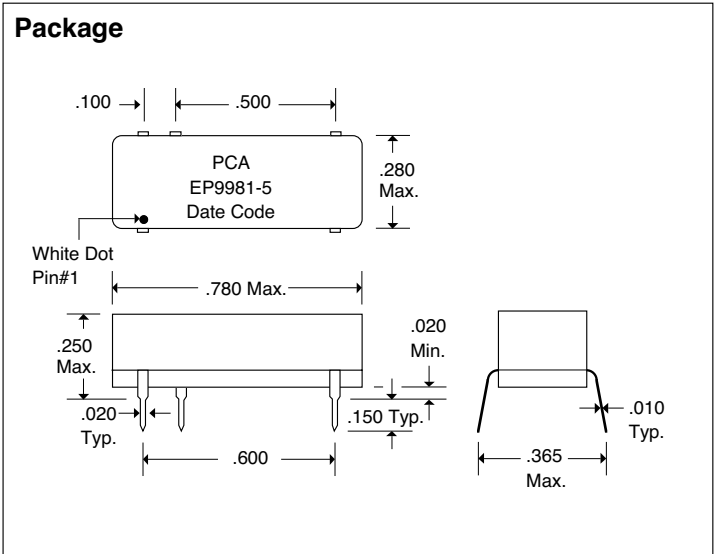

Input Pulse Test Conditions @ 25° C		Unit
E <sub>IN</sub>	Pulse Input Voltage	3.2 Volts
T <sub>RI</sub>	Pulse Rise Time	2.0 nS
P <sub>WI</sub>	Pulse Width	10 nS
P	Period	P <sub>WO</sub> x2 nS
V <sub>CC</sub>	Supply Voltage	20 nS (For EP9981-5)
		5.0 Volts