

Common Mode Choke

EPA2163



- Applications including FDDI-TP, Token Ring, Ethernet/10Base-T, ISDN, T1/CEPT/ISDN-PRI, and Fast Ethernet 10/100Base-T
- High impedance to minimize Common Mode Noise
- Complies with or exceeds IEEE Requirements
- Data Line Filters for EMI Noise Suppression


Electrical Parameters @ 25° C

OCL (μH Min.)	Interwinding Capacitance (pF Max.)	Leakage Inductance (μH Max.)	DCR (Max.)
@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	
85	12	0.25	0.20


Schematic



Impedance Vs Frequency

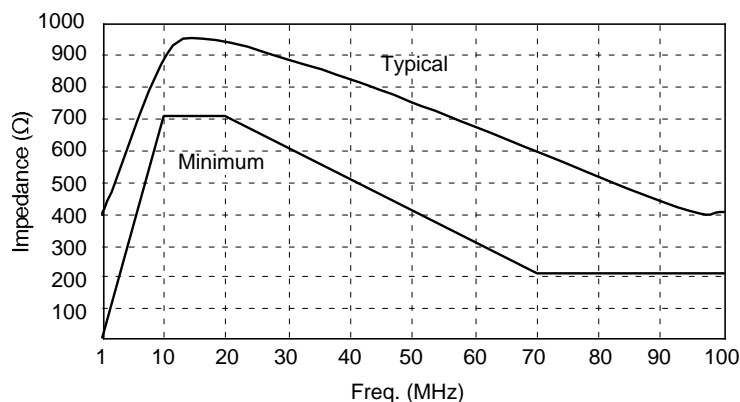

Package

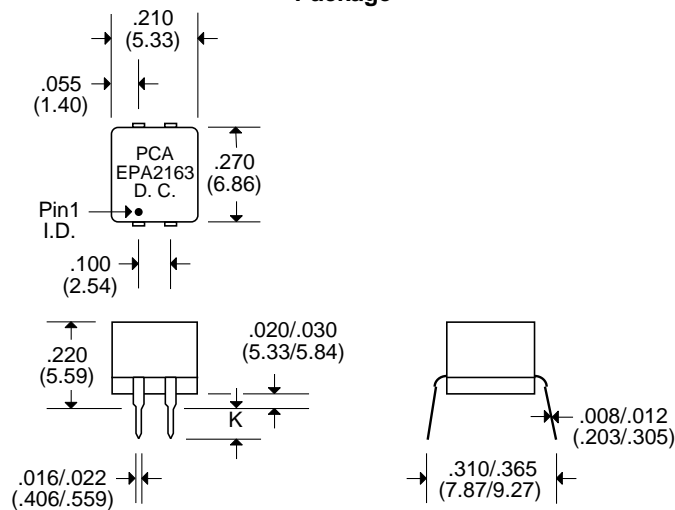

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$